

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	F	LN	DESCRIPTION	DATE	BY	APP'D
		B		ECR-05-005975	30-JUN-04	BM	JB
		C		ECR-10-019054	15SEP10	DP	MQW

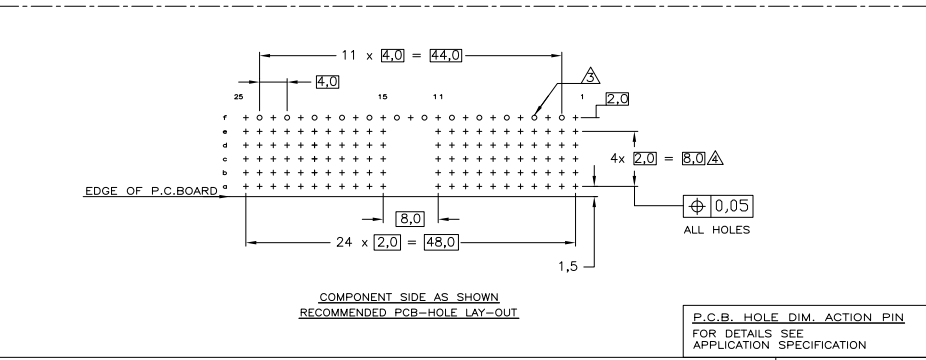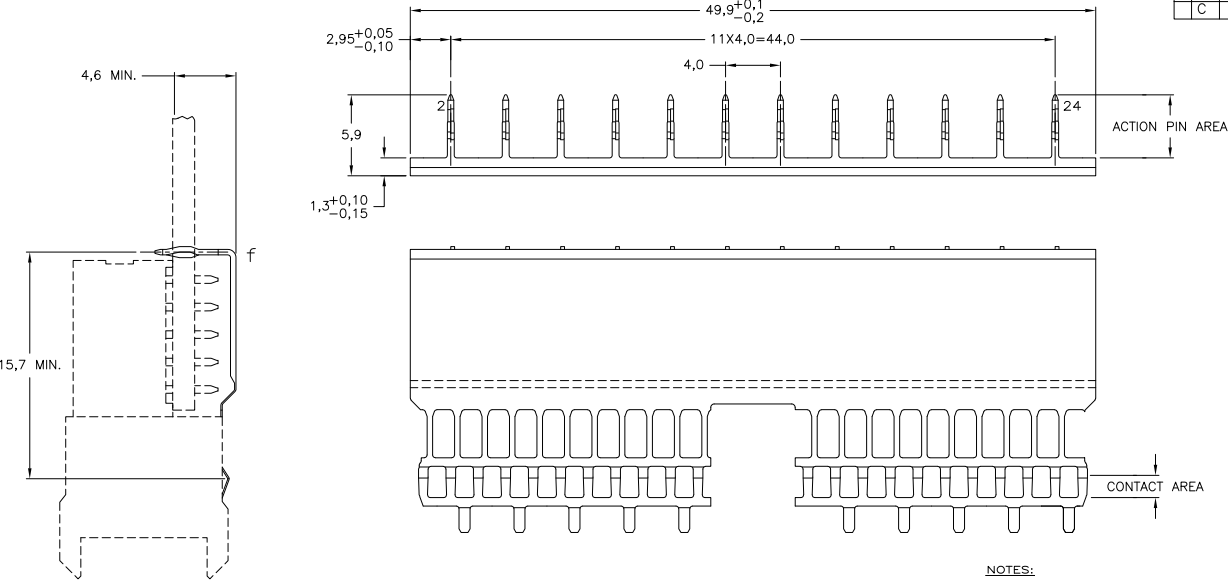

NOTES:

- ▲ PLATING:
CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.
ACTION PIN : 0,5µm Sn MIN.
REMAINDER : Ni
 - ▲ MATERIAL: PHOSPHORBRONZE.
 - ▲ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - ▲ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 - 5 MAX. BOARD THICKNESS 3,5 mm.
 - ▲ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

FINISH	MATERIAL	PARTNUMBER
		5338108-9
		5338108-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG NO. 13AUG04		Tyco Electronics Corporation	
DIMENSIONS: mm		CHK. K.N.KIRAN		25MAR05	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DPC. S.MOOLU		25MAR05	
0-PLD ±0.2		PRODUCT SPEC. B.MOOLU		NAME	
1-PLD ±0.2		APPLICATION SPEC. 108-19082		SIZE CASE CODE DRAWING NO.	
2-PLD ±0.2		114-19029		A2 00779 C-5338108	
3-PLD ±0.2		MATERIAL		RESTRICTED TO	
4-PLD ±0.2		FINISH		SCALE 5:1 SHEET 1 OF 1 REV C	
MATERIAL		FINISH		CUSTOMER DRAWING	

AMP 1471-9 REV 31MMR2000

5338108

A

REV

C