

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	F	LN	DESCRIPTION	DATE	BY	APPD
		V		REVISED PER ECO-10-021995	12JAN11	HMR	MG

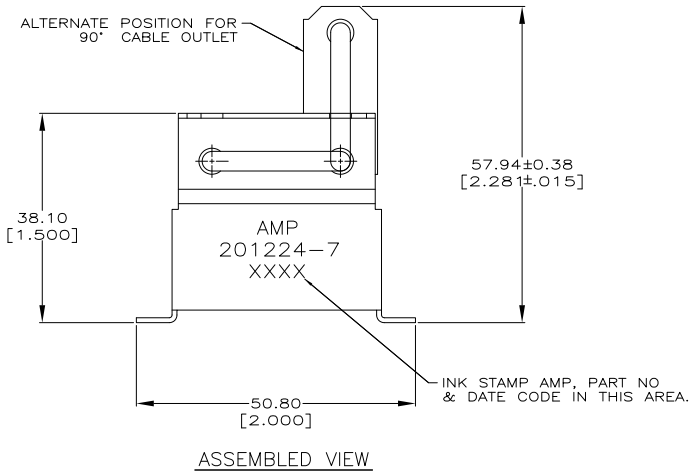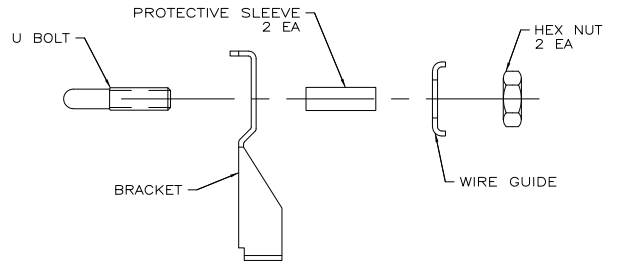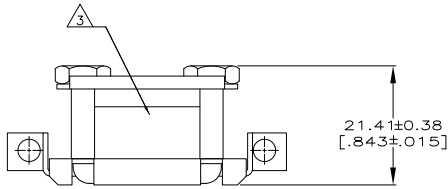

- BRACKET: STAINLESS STEEL PER QQ-S-766.  
 U BOLT: STAINLESS STEEL PER ASTM-A-582.  
 WIRE GUIDE & HEX NUT: CARBON STEEL.  
 PROTECTIVE SLEEVE: POLYVINYL CHLORIDE.
  - U BOLT: PASSIVATED.  
 WIRE GUIDE: 5.08um[.000200] MIN NICKEL PLATE.  
 HEX NUT: ZINC PLATED PER ASTM-B-633.
- △ MAX CLAMP AREA = 225.81 SQ mm [.350 SQ IN]

SUPERSEDED BY 201224-7	201224-7
	201224-1
	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN C. REISNYDER 06 SEP 95	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK R. STONE 15 SEP 95	CLAMP KIT, UNASSEMBLED, 34 PLACE, MINIATURE RECTANGULAR, STRAIN RELIEF, M SERIES	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APRD S. STEINHÄUER 03 OCT 95	NAME	RESTRICTED TO
0 PLG	± .005	APPLICATION SPEC:	SIZE	00779
1 PLG	± .005	WEIGHT	00779	201224
2 PLG	± 0.13 (.005)			
3 PLG	± .005			
4 PLG	± .005			
ANGLES	± .005			
FINISH				
MATERIAL		CUSTOMER DRAWING	SCALE	2:1
			SHEET	1 of 1
			REV	V