

4

3

2

1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LWR	DESCRIPTION	DATE	OWN	APPD
A		REV PER ECO 09-011512	5/27/2009	DW	JO

NOTES:

- DESIGNED FOR USE WITH .141 SEMI-RIGID (RG402/U) AND CONFORMABLE CABLES HAVING SIMILAR DIAMETERS
- ASSEMBLE ONTO CABLE USING IS SHEET 408-8904

CABLE PREPARATION
 SCALE: NTS

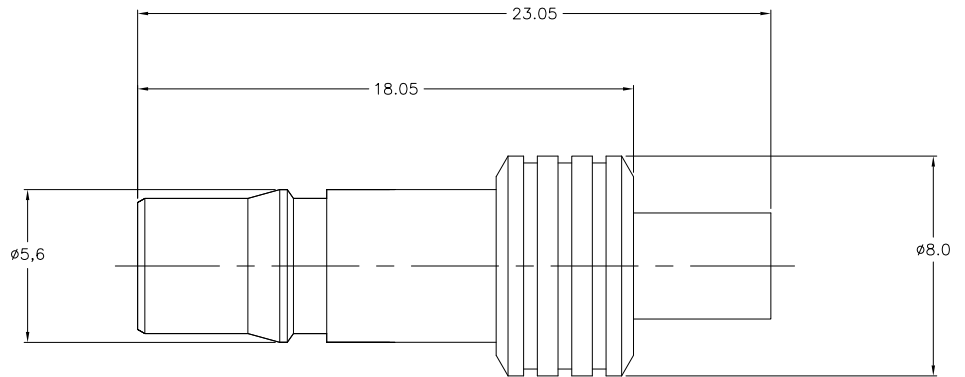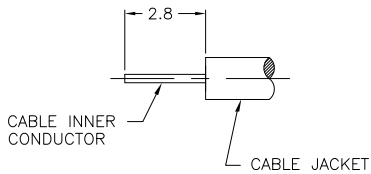

1408411-8	1408459-1	1408348-1
CONTACT	HSG ASSY	PART NO.

CENTER CONTACT	BERYLLIUM COPPER	GOLD
HOUSING	BRASS	GOLD
DIELECTRIC	PTFE	N/A
COMPONENT	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW 11Nov2002	Tyco Electronics Corporation Norwood, MA 02062	
DIMENSIONS: MM		DocID: 108-2087	QMA STRAIGHT CABLE JACK DIRECT SOLDER ATTACHMENT	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPC 3/4/04	RESTRICTED TO	
0 PLG	± .05	PRODUCT SPEC	SIZE	00779
1 PLG	± .05	APPLICATION SPEC	C=	1408348
2 PLG	± .05	WEIGHT	SCALE	10:1
3 PLG	± .05	CUSTOMER DRAWING	SHEET	1 OF 1
4 PLG	± .05		REV	A
ANGLES	± .1			
FINISH				

AMP 1471-9 REV 31MM2000

1408348

A