

To all our customers

---

**Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.**

---

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.)

Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.  
Customer Support Dept.  
April 1, 2003

# M52742ASP

## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### DESCRIPTION

M52742ASP is semiconductor integrated circuit for CRT display monitor.

It includes OSD blanking, OSD mixing, retrace blanking, wide band amplifier, brightness control, uniformity function.

Main/sub contrast and OSD adjust function can be controlled by PC bus.

### FEATURES

- Frequency band width: RGB.....200MHz (at -3dB)  
OSD.....80MHz
- Input :RGB.....0.7V<sub>P-P</sub> (typ.)  
OSD.....3V<sub>P-P</sub> minimum (positive)  
BLK (for OSD).....3V<sub>P-P</sub> minimum (positive)  
Retrace BLK.....3V<sub>P-P</sub> minimum (positive)
- Output :RGB.....5.5V<sub>P-P</sub> (max.)  
OSD.....5V<sub>P-P</sub> (max.)
- Main contrast and sub contrast can be controlled by I<sup>2</sup>C bus.
- Include internal and external pedestal clamp circuit

### STRUCTURE

Bipolar silicon monolithic IC

### APPLICATION

CRT display monitor


### RECOMMENDED OPERATING CONDITION

Supply voltage range.....11.5 to 12.5V (V3, V8, V12, V36)  
4.5 to 5.5V (V17)  
Rated supply voltage.....12.0V (V3, V8, V12, V36)  
5.0V (V17)


### MAJOR SPECIFICATION

Bus controlled 3ch video pre-amp with OSD mixing function and retrace blanking function

### PIN CONFIGURATION (TOP VIEW)

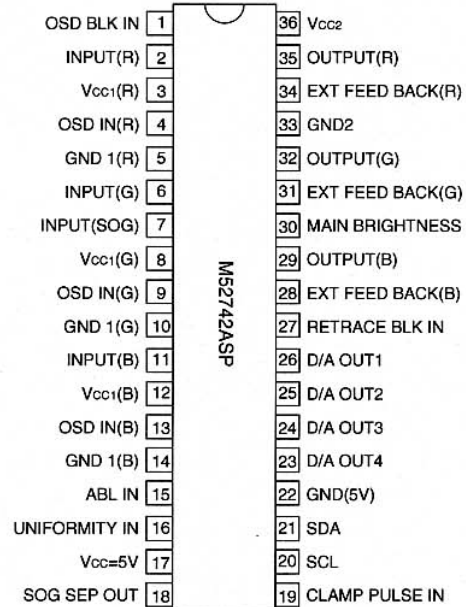

Outline 36P4E

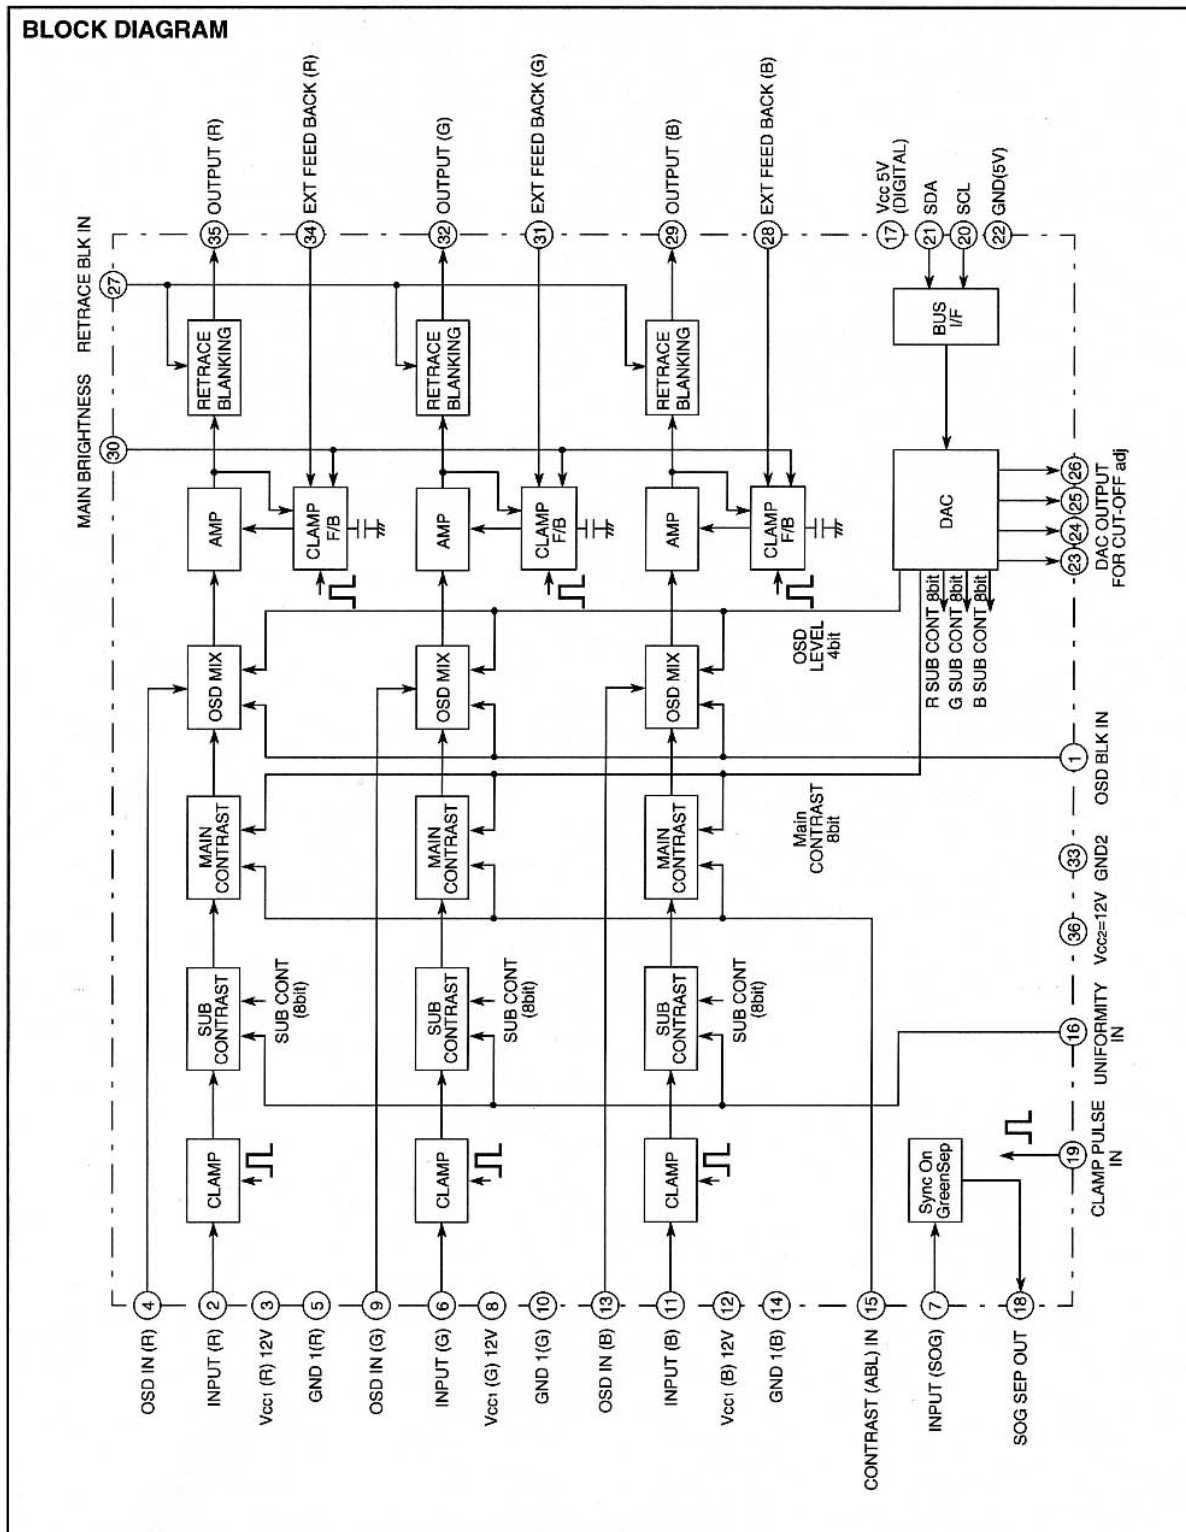**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****BLOCK DIAGRAM**

**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****ABSOLUTE MAXIMUM RATINGS** (Ta=25°C)

Symbol	Parameter	Ratings	Unit
Vcc12	Supply voltage (pins 3,8,12,36)	13.0	V
Vcc5	Supply voltage (pin 17)	6.0	V
Pa	Power dissipation	2403	mW
Topr	Ambient temperature	-20 to +75	°C
Tstg	Storage temperature	-40 to +150	°C
Vopr12	Recommended supply 12	12.0	V
Vopr5	Recommended supply 5	5.0	V

**ELECTRICAL CHARACTERISTICS** (Vcc=12V, 5V, Ta=25°C, unless otherwise noted)

Symbol	Parameter	Test point (s)	Input								CTL voltage		BUS CTL (H)												Limits			Unit
			2,6,11 RGB in	1 OSD BLK	4,9,13 OSD in	19 CP in	27 ReT BLK	7 SOG in	16 UNI in	30 Bright	15 ABL	00H Main cont	01H Sub cont 1	02H Sub cont 2	03H Sub cont 3	04H OSD Adj	05H BLK Adj	06H D/A OUT 1	07H D/A OUT 2	08H D/A OUT 3	09H D/A OUT 4	0BH INT EXT	Min.	Typ.	Max.			
Icc1	Circuit current1	IA	a	a	a	b SG5	a	a	a	4.0	5.0	FFH 255	FFH 255	FFH 255	FFH 255	00H 0	00H 0	FFH 255	FFH 255	FFH 255	FFH 255	00H 0	-	126	146	mA		
Icc2	Circuit current2	IB	a	a	a	b SG5	a	a	a	4.0	5.0												-	18	25	mA		
Vomax	Output dynamic range	OUT	b SG2	a	a	b SG5	a	a	a	Variable	5.0	↓											6.0	8.0	-	V <sub>P-P</sub>		
Vimax	Maximum input	IN OUT	b SG2 Variable	a	a	b SG5	a	a	a	2.0	5.0	64H 100											1.6	-	-	V <sub>P-P</sub>		
Gv	Maximum gain	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	FFH 255											16.5	17.7	19.4	dB		
ΔGv	Relative maximum gain	-	-	-	-	-	-	-	-	-	-	-											0.8	1.0	1.2	-		
Vc1	Main contrast control characteristics1	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	C8H 200											15.5	17.0	18.5	dB		
ΔVc1	Main contrast control relative characteristics1	-	-	-	-	-	-	-	-	-	-	-											0.8	1.0	1.2	-		
Vc2	Main contrast control characteristics2	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	64H 100											9.5	11.0	12.5	dB		
ΔVc2	Main contrast control relative characteristics2	-	-	-	-	-	-	-	-	-	-	-											0.8	1.0	1.2	-		
Vc3	Main contrast control characteristics3	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	14H 20											0.2	0.4	0.6	V <sub>P-P</sub>		
ΔVc3	Main contrast control relative characteristics3	-	-	-	-	-	-	-	-	-	-	-	↓	↓	↓								0.8	1.0	1.2	-		
Vsc1	Sub contrast control characteristics1	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	FFH 255	C8H 200	C8H 200	C8H 200								16.0	17.5	19.0	dB		
ΔVsc1	Sub contrast control relative characteristics1	-	-	-	-	-	-	-	-	-	-	-	-	-	-								0.8	1.0	1.2	-		
Vsc2	Sub contrast control characteristics2	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	FFH 255	64H 100	64H 100	64H 100								12.0	13.5	15.0	dB		
ΔVsc2	Sub contrast control relative characteristics2	-	-	-	-	-	-	-	-	-	-	-	-	-	-								0.8	1.0	1.2	-		
Vsc3	Sub contrast control characteristics3	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	FFH 255	14H 20	14H 20	14H 20								1.5	1.9	2.2	V <sub>P-P</sub>		
ΔVsc3	Sub contrast control relative characteristics3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	↓	↓	↓	↓	↓	↓	↓	0.8	1.0	1.2	-		

**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****ELECTRICAL CHARACTERISTICS (cont.)**

Symbol	Parameter	Test point (s)	Input								CTL voltage		BUS CTL (H)														Limits			Unit	
			2,6,11 RGB in	1 OSD BLK	4,9,13 OSD in	19 CP in	27 ReT BLK	7 SOG in	16 UNI in	30 Bri- ght	15 ABL	00H Main cont	01H Sub cont 1	02H Sub cont 2	03H Sub cont 3	04H OSD Adj	05H BLK Adj	06H D/A OUT 1	07H D/A OUT 2	08H D/A OUT 3	09H D/A OUT 4	0BH INT EXT	Min.	Typ.	Max.						
VMSC	Main/sub contrast control characteristics	OUT	b SG1	a	a	b SG5	a	a	a	2.0	5.0	CBH 200	CBH 200	CBH 200	CBH 200													3.5	4.1	4.7	V <sub>P-P</sub>
ΔVMSC	Main/sub contrast control relative characteristics	-	-	-	-	-	-	-	-	-	-	-	-	-	-													0.8	1.0	1.2	-
ABL1	ABL control characteristics1	OUT	b SG1	a	a	b SG5	a	a	a	2.0	4.0	FFH 255	FFH 255	FFH 255	FFH 255													4.2	5.0	5.8	V <sub>P-P</sub>
ΔABL1	ABL control relative characteristics1	-	-	-	-	-	-	-	-	-	-																	0.8	1.0	1.2	-
ABL2	ABL control characteristics2	OUT	b SG1	a	a	b SG5	a	a	a	2.0	2.0																	2.6	3.1	3.6	V <sub>P-P</sub>
ΔABL2	ABL control relative characteristics2	-	-	-	-	-	-	-	-	-	-																	0.8	1.0	1.2	-
V <sub>B1</sub>	Brightness control characteristics1	OUT	a	a	a	b SG5	a	a	a	4.0	5.0																	3.3	3.7	4.1	V
ΔV <sub>B1</sub>	Brightness control relative characteristics1	-	-	-	-	-	-	-	-	-	-																	-0.3	0	0.3	V
V <sub>B2</sub>	Brightness control characteristics2	OUT	a	a	a	b SG5	a	a	a	2.0	5.0																	1.5	1.8	2.1	V
ΔV <sub>B2</sub>	Brightness control relative characteristics2	-	-	-	-	-	-	-	-	-	-																	-0.3	0	0.3	V
V <sub>B3</sub>	Brightness control characteristics3	OUT	a	a	a	b SG5	a	a	a	1.0	5.0																	0.7	0.9	1.1	V
ΔV <sub>B3</sub>	Brightness control relative characteristics3	-	-	-	-	-	-	-	-	-	-	↓																-0.3	0	0.3	V
F <sub>C1</sub>	Frequency characteristics1 (f=50MHz)	OUT	b SG3	a	a	a 5V	a	a	a	Variable	5.0	Variable																-2.0	0	2.5	dB
ΔF <sub>C1</sub>	Frequency relative characteristics1 (f=50MHz)	-	-	-	-	-	-	-	-	-	-	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	-1.0	0	1.0	dB
F <sub>C1'</sub>	Frequency characteristics1 (f=200MHz)	OUT	b SG3	a	a	a 5V	a	a	a	Variable	5.0	Variable	FFH 255	FFH 255	FFH 255	00H 0	00H 0	FFH 255	FFH 255	FFH 255	FFH 255	00H 0					-3.0	0	3.0	dB	
ΔF <sub>C1'</sub>	Frequency relative characteristics1 (f=200MHz)	-	-	-	-	-	-	-	-	-	-																	-1.0	0	1.0	dB
F <sub>C2</sub>	Frequency characteristics2 (f=200MHz)	OUT	b SG3	a	a	a 5V	a	a	a	Variable	5.0																	-3.0	3.0	5.0	dB
ΔF <sub>C2</sub>	Frequency relative characteristics2 (f=200MHz)	-	-	-	-	-	-	-	-	-	-	↓																-1.0	0	1.0	dB
C.T.1	Crosstalk 1 (f=50MHz)	OUT(29) OUT(32)	2a SG3 6a 11a	a	a	a 5V	a	a	a	Variable	5.0	FFH 255																-	-25	-20	dB
C.T.1'	Crosstalk 1 (f=200MHz)	OUT(29) OUT(32)	2a SG3 6a 11a	a	a	a 5V	a	a	a	Variable	5.0																	-	-15	-10	dB
C.T.2	Crosstalk 2 (f=50MHz)	OUT(29) OUT(35)	2a SG3 6a 11a	a	a	a 5V	a	a	a	Variable	5.0																	-	-25	-20	dB
C.T.2'	Crosstalk 2 (f=200MHz)	OUT(29) OUT(35)	2a SG3 6a 11a	a	a	a 5V	a	a	a	Variable	5.0																	-	-15	-10	dB
C.T.3	Crosstalk 3 (f=50MHz)	OUT(32) OUT(35)	2a SG3 6a 11aSG3	a	a	a 5V	a	a	a	Variable	5.0																	-	-25	-20	dB
C.T.3'	Crosstalk 3 (f=200MHz)	OUT(32) OUT(35)	2a SG3 6a 11aSG3	a	a	a 5V	a	a	a	Variable	5.0	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	-	-15	-10	dB

**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****ELECTRICAL CHARACTERISTICS (cont.)**

Symbol	Parameter	Test point (s)	Input							CTL voltage		BUS CTL (H)												Limits			Unit
			2,6,11 RGB in	1 OSD BLK	4,9,13 OSD in	19 CP in	27 ReT BLK	7 SOG in	16 UNI in	30 Bright	15 ABL	00H Main ctrl	01H Sub ctrl 1	02H Sub ctrl 2	03H Sub ctrl 3	04H OSD Adj	05H BLK Adj	06H D/A OUT 1	07H D/A OUT 2	08H D/A OUT 3	09H D/A OUT 4	0BH INT EXT	Min.	Typ.	Max.		
Tr	Pulse characteristics1 (4V <sub>P-P</sub> )	OUT	b SG1	a	a	b SG5	a	a	a	Variable	5.0	Variable												-	1.7	-	ns
Tf	Pulse characteristics2 (4V <sub>P-P</sub> )	OUT	b SG1	a	a	b SG5	a	a	a	Variable	5.0	Variable												-	2.2	-	ns
ΔTr	Relative pulse characteristics1	OUT	b SG1	a	a	b SG5	a	a	a	Variable	5.0	Variable												-0.8	0	0.8	ns
ΔTf	Relative pulse characteristics2	OUT	b SG1	a	a	b SG5	a	a	a	Variable	5.0	Variable												-0.8	0	0.8	ns
VthCP	Clamp pulse threshold voltage	OUT	b SG1	a	a	b SG5 Variable	a	a	a	2.0	5.0	FFH 255												1.0	1.5	2.0	V
WCP	Clamp pulse minimum width	OUT	b SG1	a	a	b SG5 Variable	a	a	a	2.0	5.0													0.2	0.5	-	μs
OTr	OSD pulse characteristics1	OUT	a	a	b SG6	b SG5	a	a	a	2.0	5.0					0BH 8								-	3.0	6.0	ns
OTf	OSD pulse characteristics2	OUT	a	a	b SG6	b SG5	a	a	a	2.0	5.0					0BH 8								-	3.0	6.0	ns
Oaj1	OSD adjust control characteristics1	OUT	a	b SG6	b SG6	b SG5	a	a	a	2.0	5.0					0FH 15								4.6	5.4	6.2	V <sub>P-P</sub>
ΔOaj1	OSD adjust control relative characteristics1	-	-	-	-	-	-	-	-	-	-					-								0.8	1.0	1.2	-
Oaj2	OSD adjust control characteristics2	OUT	a	b SG6	b SG6	b SG5	a	a	a	2.0	5.0					0BH 8								2.8	3.3	3.8	V <sub>P-P</sub>
ΔOaj2	OSD adjust control relative characteristics2	-	-	-	-	-	-	-	-	-	-					-								0.8	1.0	1.2	-
OBLK	OSD adjust control characteristics3	OUT	a	b SG6	a	b SG5	a	a	a	2.0	5.0					00H 0								0	-0.1	-0.3	V <sub>P-P</sub>
ΔOBLK	OSD adjust control relative characteristics3	-	-	-	-	-	-	-	-	-	-					-								-0.2	0	0.2	V <sub>P-P</sub>
VthOSD	OSD input threshold voltage	OUT	a	b SG6	b SG6 Variable	b SG5	a	a	a	2.0	5.0					0BH 8								2.2	2.7	3.2	V
VthBLK	OSD BLK input threshold voltage	OUT	b SG1	b SG6 Variable	a	b SG5	a	a	a	2.0	5.0					00H 0								2.2	2.7	3.2	V
HBLK1	Retrace BLK characteristics1	OUT	a	a	a	b SG5	b SG7	a	a	2.0	5.0					0FH 15								1.7	2.0	2.3	V
HBLK2	Retrace BLK characteristics2	OUT	a	a	a	b SG5	b SG7	a	a	2.0	5.0					0BH 6								0.7	1.0	1.3	V
HBLK3	Retrace BLK characteristics3	OUT	a	a	a	b SG5	b SG7	a	a	2.0	5.0					00H 0								0.1	0.4	0.7	V
VthRET	Retrace BLK input threshold voltage	OUT	a	a	a	b SG5	b SG7 Variable	a	a	2.0	5.0					0BH 8								1.0	1.5	2.0	V
SS-NV	SOG input maximum noise voltage	SOG IN Sync OUT	a	a	a	a	a	b SG4 Variable	a	2.0	5.0													-	-	0.02	V <sub>P-P</sub>
SS-SV	SOG minimum input voltage	SOG IN Sync OUT	a	a	a	a	a	b SG4 Variable	a	2.0	5.0													0.2	0.3	-	V <sub>P-P</sub>
VSH	Sync output hi level	Sync OUT	a	a	a	a	a	b SG4	a	2.0	5.0													4.5	4.9	5.0	V
VSL	Sync output lo level	Sync OUT	a	a	a	a	a	b SG4	a	2.0	5.0													0	0.3	0.6	V
TDS-F	Sync output delay time1	Sync OUT	a	a	a	a	a	b SG4	a	2.0	5.0													0	60	90	ns

**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****ELECTRICAL CHARACTERISTICS (cont.)**

Symbol	Parameter	Test point (s)	Input							CTL voltage		BUS CTL (H)												Limits			Unit
			2,6,11 RGB in	1 OSD BLK	4,9,13 OSD in	19 CP in	27 ReT BLK	7 SOG in	16 UNI in	30 Bri- ght	15 ABL	00H Main cont	01H Sub cont 1	02H Sub cont 2	03H Sub cont 3	04H OSD Adj	05H BLK Adj	06H D/A OUT 1	07H D/A OUT 2	08H D/A OUT 3	09H D/A OUT 4	0BH INT EXT	Min.	Typ.	Max.		
TDS-R	Sync output delay time <sup>2</sup>	Sync OUT	a	a	a	a	a	<sup>b</sup> SG4	a	2.0	5.0												0	60	90	ns	
VOH	D/A H output voltage	D/A OUT	a	a	a	a	a	a	a	2.0	5.0	FFH 255	FFH 255	FFH 255	FFH 255	00H 0	FFH 255	FFH 255	FFH 255	FFH 255	00H 0	4.5	5.0	5.5	VDC		
VOL	D/A L output voltage	D/A OUT	a	a	a	a	a	a	a	2.0	5.0						00H 0	00H 0	00H 0	00H 0		0	0.5	1.0	VDC		
DNL	D/A nonlinearity	D/A OUT	a	a	a	a	a	a	a	2.0	5.0						Variable	Variable	Variable	Variable		-1.0	-	1.0	LSB		
UNI1	Uniformity characteristics <sup>1</sup>	OUT	<sup>b</sup> SG1	a	a	<sup>b</sup> SG5	a	a	<sup>b</sup> SG6 2.5V	2.0	5.0	CBH 200	CBH 200	CBH 200	CBH 200		FFH 255	FFH 255	FFH 255	FFH 255		7	10	13	%		
UNI2	Uniformity characteristics <sup>2</sup>	OUT	<sup>b</sup> SG1	a	a	<sup>b</sup> SG5	a	a	<sup>b</sup> SG6 1.25V	2.0	5.0											3.5	5	6.5	%		
1A-	D/A input current range	D/A OUT	a	a	a	a	a	a	a	2.0	5.0	00H 0	00H 0	00H 0	00H 0	00H 0	00H 0	00H 0	00H 0	00H 0	00H 0	0.18	-	-	mA		
1A+	D/A output current range	D/A OUT	a	a	a	a	a	a	a	2.0	5.0											-	-	1.0	mA		

**ELECTRICAL CHARACTERISTICS TEST METHOD****Icc1 Circuit current1**

Measuring conditions are as listed in supplementary Table.  
Measured with a current meter at test point 1A.

**Icc2 Circuit current2**

Measuring conditions are as listed in supplementary Table.  
Measured with a current meter at test point 1B.


**Vomax Output dynamic range**

Decrease V30 gradually, and measure the voltage when the waveform output is distorted. The voltage is called VOL.

Next, increase V30 gradually, and measure the voltage when the top of waveform output is distorted. The voltage is called VOH.

Voltage Vomax is calculated by the equation below:

$$Vomax = VOH - VOL$$

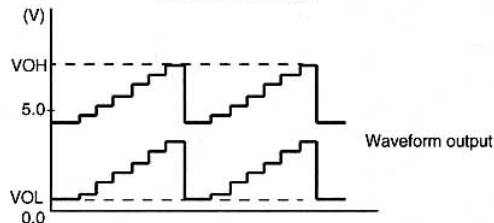**Vimax Maximum input**

Increase the input signal (SG2) amplitude gradually, starting from 700mV<sub>P-P</sub>. Measure the amplitude of the input signal when the output signal starts becoming distorted.

**Gv Maximum gain**

Input SG1, and read the amplitude output at OUT (29, 32, 35). The amplitude is called VOUT (29, 32, 35). Maximum gain Gv is calculated by the equation below:

$$Gv = 20 \log \frac{VOUT}{0.7} \text{ (dB)}$$

**ΔGv Relative maximum gain**

Relative maximum gain ΔGv is calculated by the equation below:

$$\Delta Gv = VOUT(29)/VOUT(32), \\ VOUT(32)/VOUT(35), \\ VOUT(35)/VOUT(29)$$

**Vc1 Main contrast control characteristics1**

Measuring the amplitude output at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35). Main contrast control characteristics Vc1 is calculated by the equation below:

$$Vc1 = 20 \log \frac{VOUT}{0.7} \text{ (dB)}$$

**ΔVc1 Main contrast control relative characteristics1**

Relative characteristics ΔVc1 is calculated by the equation below:

$$\Delta Vc1 = VOUT(29)/VOUT(32), \\ VOUT(32)/VOUT(35), \\ VOUT(35)/VOUT(29)$$

**Vc2 Main contrast control characteristics2**

Measuring condition and procedure are the same as described in Vc1.

**ΔVc2 Main contrast control relative characteristics2**

Measuring condition and procedure are the same as described in ΔVc1.

# M52742ASP

## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### Vc3 Main contrast control characteristics3

Measuring the amplitude output at OUT (29, 32, 35).  
The measured value is called VOUT (29, 32, 35).

### ΔVc3 Main contrast control relative characteristics3

Measuring condition and procedure are the same as described in ΔVc1.

### Vsc1 Sub contrast control characteristics1

Measure the amplitude output at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35). Sub contrast control characteristics Vsc1 is calculated by the equation below:

$$Vsc1 = 20 \log \frac{VOUT}{0.7} \text{ (dB)}$$

### ΔVsc1 Sub contrast control relative characteristics1

Relative characteristics ΔVsc1 is calculated by the equation below:

$$\Delta Vsc1 = \frac{VOUT(29)}{VOUT(32)}, \frac{VOUT(32)}{VOUT(35)}, \frac{VOUT(35)}{VOUT(29)}.$$

### Vsc2 Sub contrast control characteristics2

Measuring condition and procedure are the same as described in Vsc1.

### ΔVsc2 Sub contrast control relative characteristics2

Measuring condition and procedure are the same as described in ΔVsc1.

### Vsc3 Sub contrast control characteristics3

Measuring the amplitude output at OUT (29, 32, 35).  
The measured value is called VSC3

### ΔVsc3 Sub contrast control relative characteristics3

Measuring condition and procedure are the same as described in ΔVsc1.

### VMSC Main/sub contrast control characteristics

Measure the amplitude output at OUT (29, 32, 35). The measured value is called VMSC

### ΔVMSC Main/sub contrast control relative characteristics

Relative characteristics ΔVMSC is calculated by the equation below:

$$\Delta VMSC = \frac{VOUT(29)}{VOUT(32)}, \frac{VOUT(32)}{VOUT(35)}, \frac{VOUT(35)}{VOUT(29)}$$

### ABL1 ABL control characteristics1

Measure the amplitude output at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35), and is treated as ABL1.

### ΔABL1 ABL control relative characteristics1

Relative characteristics ΔABL1 is calculated by the equation below:

$$\Delta ABL1 = \frac{VOUT(29)}{VOUT(32)}, \frac{VOUT(32)}{VOUT(35)}, \frac{VOUT(35)}{VOUT(29)}$$

### ABL2 ABL control characteristics2

Measuring condition and procedure are the same as described in ABL1.

### ΔABL2 ABL control relative characteristics2

Measuring condition and procedure are the same as described in ΔABL1.

### Vb1 Brightness control characteristics1

Measure the DC voltage at OUT (29, 32, 35) with a voltmeter. The measured value is called VOUT (29, 32, 35), and is treated as Vb1.

### ΔVb1 Brightness control relative characteristics1

Relative characteristics ΔVb1 is calculated by the difference in the output between the channels.

$$\Delta Vb1 = \frac{VOUT(29) - VOUT(32)}{VOUT(32) - VOUT(35)}, \frac{VOUT(32) - VOUT(35)}{VOUT(35) - VOUT(29)}$$

### Vb2 Brightness control characteristics2

Measuring condition and procedure are the same as described in Vb1.

### ΔVb2 Brightness control relative characteristics2

Measuring condition and procedure are the same as described in ΔVb1.

### Vb3 Brightness control characteristics3

Measuring condition and procedure are the same as described in Vb1.

### ΔVb3 Brightness control relative characteristics3

Measuring condition and procedure are the same as described in ΔVb1.

**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****Fc1 Frequency characteristics1 (f=50MHz)**

First, SG3 to 1MHz is as input signal. Input a resistor that is about 2kΩ to offer the voltage at input pins (2, 6, 11) in order that the bottom of input signal is 2.5V. Control the main contrast in order that the amplitude of sine wave output is 4.0V<sub>P-P</sub>. Control the brightness in order that the bottom of sine wave output is 2.0V<sub>P-P</sub>. By the same way, measure the output amplitude when SG3 to 50MHz is as input signal. The measured value is called VOUT (29, 32, 35). Frequency characteristics Fc1 (29, 32, 35) is calculated by the equation below:

$$Fc1 = 20 \log \frac{VOUT \text{ } V_{P-P}}{\text{Output amplitude when inputted SG3 (1MHz): } 4V_{P-P}} \text{ (dB)}$$

**ΔFc1 Frequency relative characteristics1 (f=50MHz)**

Relative characteristics ΔFc1 is calculated by the difference in the output between the channels.

**Fc1' Frequency characteristics1 (f=200MHz)**

Measuring condition and procedure are the same as described in table, expect SG3 to 200MHz.

**ΔFc1' Frequency relative characteristics1 (f=200MHz)**

Relative characteristics ΔFc1' is calculated by the difference in the output between the channels.

**Fc2 Frequency characteristics2 (f=200MHz)**

SG3 to 1MHz is as input signal. Control the main contrast in order that the amplitude of sine wave output is 1.0V<sub>P-P</sub>. By the same way, measure the output amplitude when SG3 to 200MHz is as input signal.

The measured value is called VOUT (29, 32, 35). Frequency characteristics Fc2 (29, 32, 35) is calculated by the equation below:

$$Fc2 = 20 \log \frac{VOUT \text{ } V_{P-P}}{\text{Output amplitude when inputted SG3 (1MHz): } 4V_{P-P}} \text{ (dB)}$$

**ΔFc2 Frequency relative characteristics2 (f=200MHz)**

Relative characteristics ΔFc2 is calculated by the difference in the output between the channels.

**C.T.1 Crosstalk1 (f=50MHz)**

Input SG3 (50MHz) to pin2 only, and then measure the waveform amplitude output at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35). Crosstalk C.T.1 is calculated by the equation below:

$$C.T.1 = 20 \log \frac{VOUT (29, 32)}{VOUT (35)} \text{ (dB)}$$

**C.T.1' Crosstalk1 (f=200MHz)**

Measuring condition and procedure are the same as described in C.T.1, expect SG3 to 200MHz.

**C.T.2 Crosstalk2 (f=50MHz)**

Input SG3 (50MHz) to pin6 only, and then measure the waveform amplitude output at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35). Crosstalk C.T.2 is calculated by the equation below:

$$C.T.2 = 20 \log \frac{VOUT (29, 32)}{VOUT (35)} \text{ (dB)}$$

**C.T.2' Crosstalk2 (f=200MHz)**

Measuring condition and procedure are the same as described in C.T.2, expect SG3 to 200MHz.

**C.T.3 Crosstalk3 (f=50MHz)**

Input SG3 (50MHz) to pin11 only, and then measure the waveform amplitude output at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35). Crosstalk C.T.3 is calculated by the equation below:

$$C.T.3 = 20 \log \frac{VOUT (29, 32)}{VOUT (35)} \text{ (dB)}$$

**C.T.3' Crosstalk3 (f=200MHz)**

Measuring condition and procedure are the same as described in C.T.3, expect SG3 to 200MHz.

**Tr Pulse characteristics1 (4V<sub>P-P</sub>)**

Control the main contrast (00H) in order that the amplitude of output signal is 4.0V<sub>P-P</sub>.

Control the brightness (V30) in order that the Black level of output signal is 2.0V.

Measure the time needed for the input pulse to rise from 10% to 90% (Tr1) and for the output pulse to rise from 10% to 90% (Tr2) with an active probe.

Pulse characteristics Tr is calculated by the equations below :

$$Tr = \sqrt{(Tr2)^2 - (Tr1)^2}$$

**ΔTr Relative pulse characteristics1**

Relative characteristics ΔTr is calculated by the difference in the output between the channels.

**Tf Pulse characteristics2 (4V<sub>P-P</sub>)**


Measure the time needed for the input pulse to fall from 90% to 10% (Tf1) and for the output pulse to fall from 90% to 10% (Tf2) with an active probe.

Pulse characteristics Tf is calculated by the equations below :

$$Tf = \sqrt{(Tf2)^2 - (Tf1)^2}$$

**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****ΔTf Relative pulse characteristics2**

Relative characteristics ΔTf is calculated by the difference in the output between the channels.

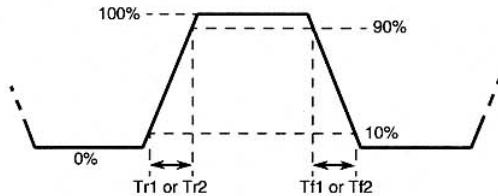**VthCP Clamp pulse threshold voltage**

Turn down the SG5 input level gradually from 5.0VP-P, monitoring the waveform output.

Measure the top level of input SG5 at when the output pedestal level is start to going down or unstable.

**WCP Clamp pulse minimum width**

Decrease the SG5 pulse width gradually from 0.5 μs, monitoring the output. Measure the input SG5 pulse width (at the point of 1.5V) at when output pedestal level is start to going down or unstable.

**OTr OSD pulse characteristics1**

Measure the time needed for the output pulse to rise from 10% to 90% (OTr) with an active prove.

**OTf OSD pulse characteristics2**

Measure the time needed for the output pulse to fall from 90% to 10% (OTf) with an active prove.

**Oaj1 OSD adjust control characteristics1**

Measure the amplitude output at OUT (29, 32, 35). The measured value is called VOUT (29,32,35), and is treated as Oaj1.

**ΔOaj1 OSD adjust control relative characteristics1**

Relative characteristics ΔOaj1 is calculated by the equation below:

$$\Delta Oaj1 = \frac{VOUT(29)}{VOUT(32)}, \frac{VOUT(32)}{VOUT(35)}, \frac{VOUT(35)}{VOUT(29)}$$

**Oaj2 OSD adjust control characteristics2**

Measuring condition and procedure are the same as described in Oaj1.

**ΔOaj2 OSD adjust control relative characteristics2**

Measuring condition and procedure are the same as described in ΔOaj1.

**OBLK OSD adjust control characteristics3**

Measuring condition and procedure are the same as described in Oaj1.

**ΔOBLK OSD adjust control relative characteristics3**

Measuring condition and procedure are the same as described in ΔOaj1.

**VthOSD OSD input threshold voltage**

Reduce the SG6 input level gradually, monitoring output. Measure the SG6 level when the output reaches 0V. The measured value is called VthOSD.

**VthBLK OSD BLK input threshold voltage**

Confirm that output signal is being blanked by the SG6 at the time. Monitoring to output signal, decreasing the level of SG6. Measure the top level of SG6 when the blanking period is disappeared. The measured value is called VthBLK.

**HBLK1 Retrace BLK characteristics1**

Measure the amplitude output is blanked by the SG7 at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35), and is treated as HBLK1.

**HBLK2 Retrace BLK characteristics2**

Measure the amplitude output is blanked by the SG7 at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35), and is treated as HBLK2.

**HBLK3 Retrace BLK characteristics3**

Measure the amplitude output is blanked by the SG7 at OUT (29, 32, 35). The measured value is called VOUT (29, 32, 35), and is treated as HBLK3.

**VthRET Retrace BLK input threshold voltage**

Confirm that output signal is being blanked by the SG7 at the time. Monitoring to output signal, decreasing the level of SG7. Measure the top level of SG7 when the blanking period is disappeared. The measured value is called VthRET.

# M52742ASP

## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### SS-NV SOG input maximum noise voltage

The sync's amplitude of SG4 be changed all white into all black, increase from 0VP-P to 0.02VP-P. No pulse output permitted.

### SS-SV SOG minimum input voltage

The sync's amplitude of SG4 be changed all white or all black, decrease from 0.3VP-P to 0.2VP-P. Confirm no malfunction produced by noise.

### VSH Sync output hi level

Measure the high voltage at SyncOUT. The measured value is treated as VSH.

### VSL Sync output lo level

Measure the low voltage at SyncOUT. The measured value is treated as VSL.


### TDS-F Sync output delay time1

SyncOUT becomes High with sync part of SG4.

Measure the time needed for the front edge of SG4 sync to fall from 50% and for SyncOUT to rise from 50% with an active prove. The measured value is treated as TDS-F, less than 90nsec.

### TDS-R Sync output delay time2

Measure the time needed for the rear edge of SG4 sync to rise from 50% and for SyncOUT to fall from 50% with an active prove. The measured value is treated as TDS-R, less than 90nsec.

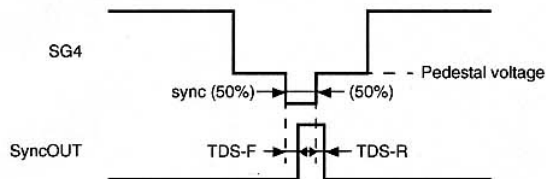

### VOH D/A H output voltage

Measure the DC voltage at D/AOUT. The measured value is treated as VOH.


### VOL D/A L output voltage

Measure the DC voltage at D/AOUT. The measured value is treated as VOL.

### IAO D/A output current range

Electric current flow from the output of D/AOUT must be less than 1.0mA --- IA+.

Electric current flow into the output of D/AOUT must be more than 0.18mA --- IA-.



### DNL D/A nonlinearity

The difference of differential non-linearity of D/AOUT must be less than  $\pm 1.0\text{LSB}$ .


### UNI1 Uniformity characteristics1

#### UNI2 Uniformity characteristics2

VuniA is amplitude output at OUT (29, 32, 35), when SG6 is low voltage. VuniB is amplitude output at OUT (29, 32, 35), when SG6 is high voltage.

moduration ratio UNI (UNI2) is calculated by the equation below;

$$\text{UNI1 (UNI2)} = 100 \cdot (\text{VuniB}/\text{VuniA} - 1) (\%)$$

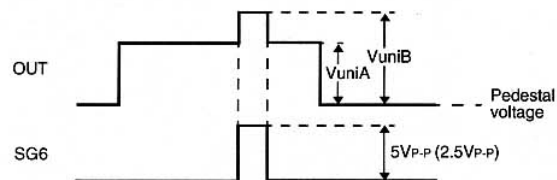

# M52742ASP


## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### I<sup>2</sup>C-BUS PROTOCOL

(1) Slave address

D7	D6	D5	D4	D3	D2	D1	R/W	
1	0	0	0	1	0	0	0	=88H

(2) Slave receiver format



(3) Sub address byte and data byte format

Function	bit	sub add.	Data byte (top:byte format under: start condition)							
			D7	D6	D5	D4	D3	D2	D1	D0
Main contrast	8	00H	A07	A06	A05	A04	A03	A02	A01	A00
			0	1	0	0	0	0	0	0
Sub contrast R	8	01H	A17	A16	A15	A14	A13	A12	A11	A10
			1	0	0	0	0	0	0	0
Sub contrast G	8	02H	A27	A26	A25	A24	A23	A22	A21	A20
			1	0	0	0	0	0	0	0
Sub contrast B	8	03H	A37	A36	A35	A34	A33	A32	A31	A30
			1	0	0	0	0	0	0	0
OSD level	4	04H	-	-	-	-	A43	A42	A41	A40
			0	0	0	0	1	0	0	0
RE-BLK adjust	4	05H	-	-	-	-	A53	A52	A51	A50
			0	0	0	0	1	0	0	0
D/A OUT1	8	06H	A67	A66	A65	A64	A63	A62	A61	A60
			1	0	0	0	0	0	0	0
D/A OUT2	8	07H	A77	A76	A75	A74	A73	A72	A71	A70
			1	0	0	0	0	0	0	0
D/A OUT3	8	08H	A87	A86	A85	A84	A83	A82	A81	A80
			1	0	0	0	0	0	0	0
D/A OUT4	8	09H	A97	A96	A95	A94	A93	A92	A91	A90
			1	0	0	0	0	0	0	0
Pedestal clamp INT/EXT SW	1	0BH	-	-	-	-	-	-	-	AB0
			0	0	0	0	0	0	0	0

Notes) pedestal level INT/EXT SW

0 → INT    1 → EXT

"Purchase of Mitsubishi electric corporation's I<sup>2</sup>C components conveys a licence under the Philips I<sup>2</sup>C Patent Rights to use these components in an I<sup>2</sup>C system, provided that the system conforms the I<sup>2</sup>C Standard Specification as defined by Philips"


# M52742ASP

## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### TIMING REQUIREMENT OF I<sup>2</sup>C

Symbol	Parameter	Min.	Max.	Unit
V <sub>IL</sub>	Input voltage LOW	-0.5	1.5	V
V <sub>IH</sub>	Input voltage HIGH	3.0	5.5	V
f <sub>SCL</sub>	SCL clock frequency	0	100	kHz
t <sub>BUF</sub>	Time the bus must be free before a new transmission can start	4.7	-	μs
t <sub>HD:STA</sub>	Hold time start condition. After this period the first clock pulse is generated	4.0	-	μs
t <sub>LOW</sub>	The LOW period of the clock	4.7	-	μs
t <sub>HIGH</sub>	The HIGH period of the clock	4.0	-	μs
t <sub>SU:STA</sub>	Set up time for start condition (Only relevant for a repeated start condition)	4.7	-	μs
t <sub>HD:DAT</sub>	Hold time for I <sup>2</sup> C devices	0	-	μs
t <sub>SU:DAT</sub>	Set-up time DATA	250	-	ns
t <sub>r</sub>	Rise time of both SDA and SCL	-	1000	ns
t <sub>f</sub>	Fall time of both SDA and SCL	-	300	ns
t <sub>SU:STO</sub>	Set-up time for stop condition	4.0	-	μs

### TIMING DIAGRAM

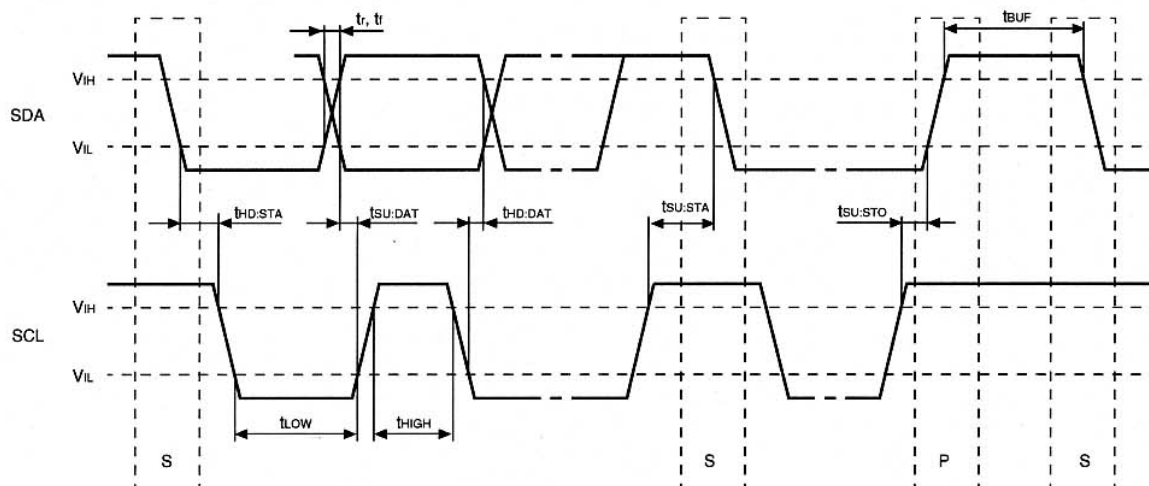

**BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR**
**INPUT SIGNAL**


SG No.	Signals
SG1 Video signal (all white)	<p>Pulse with amplitude of <math>0.7V_{P-P}</math> (<math>f=30kHz</math>). Video width of <math>25\mu s</math>. (75%)</p>
SG2 Video signal (step wave)	<p><math>0.7V_{P-P}</math> (Amplitude is variable.)</p>
SG3 Sine wave (for freq. char.)	<p>Sine wave amplitude of <math>0.7V_{P-P}</math>. <math>f=1MHz, 50MHz, 200MHz</math> (variable)</p>
SG4 Video signal (all white, all black)	<p>Video width of <math>25\mu s</math>. (75%)</p> <p><math>0.7V_{P-P}</math> all white or all black variable. <math>0.3V_{P-P}</math> Sync's amplitude is variable.</p>
SG5 Clamp pulse	<p>Pulse width and amplitude are variable.</p> <p><math>0.5\mu s</math> <math>5V_{TTL}</math></p>
SG6 OSD pulse	<p><math>5\mu s</math> <math>5V_{TTL}</math> Amplitude is variable.</p>
SG7 BLK pulse	<p><math>5\mu s</math> <math>5V_{TTL}</math> Amplitude is variable.</p>

\*)  $f=30kHz$

# M52742ASP

## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### TEST CIRCUIT



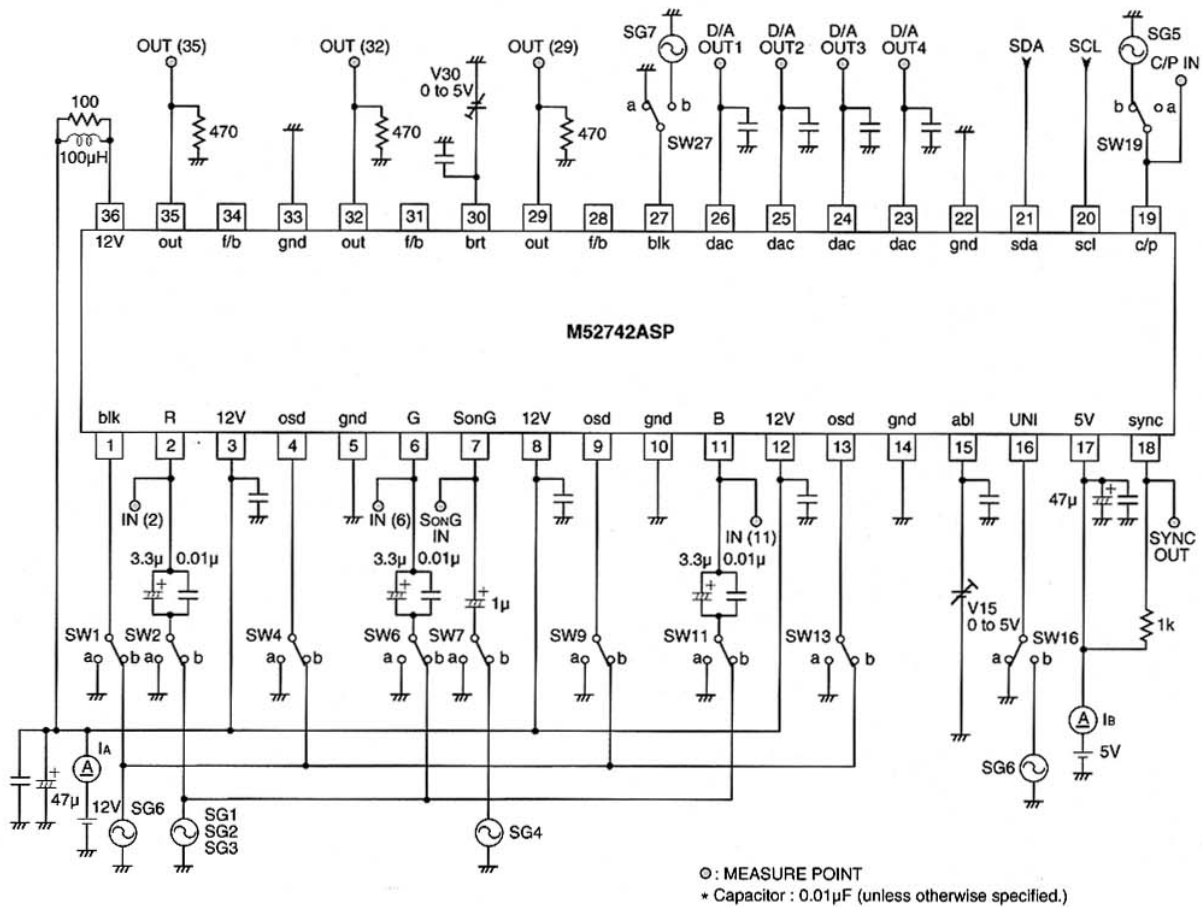


Units Resistance : Ω  
 Capacitance : F

# M52742ASP



## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### TYPICAL CHARACTERISTICS

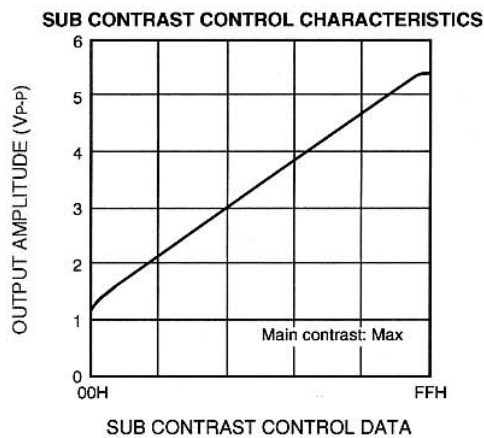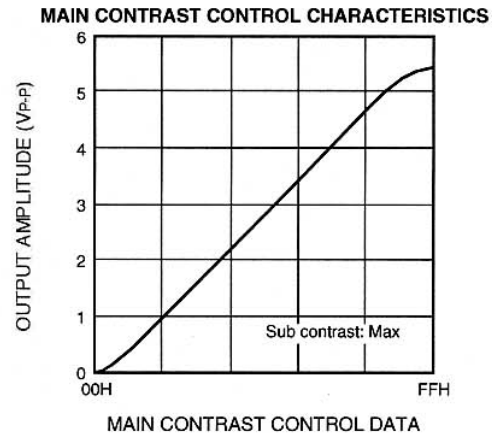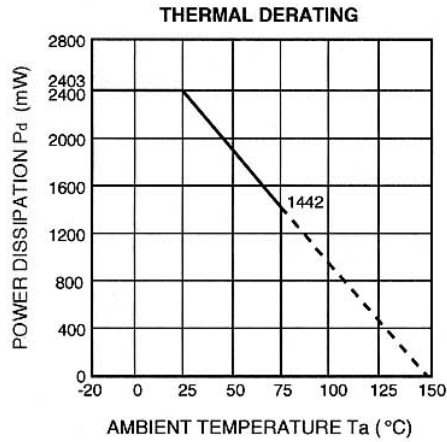


# M52742ASP

## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

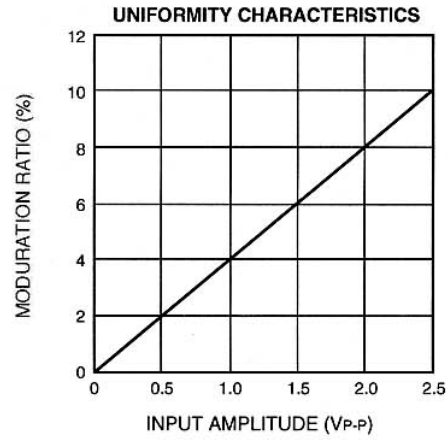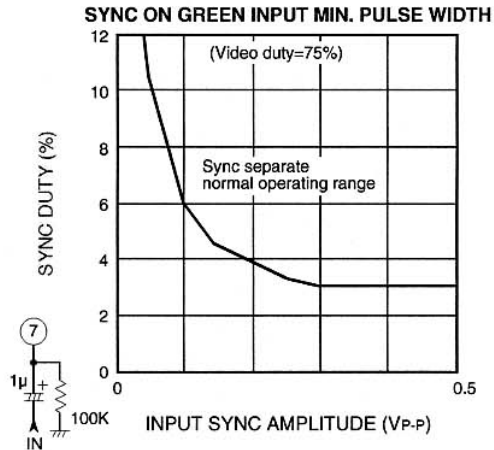

## APPLICATION EXAMPLE

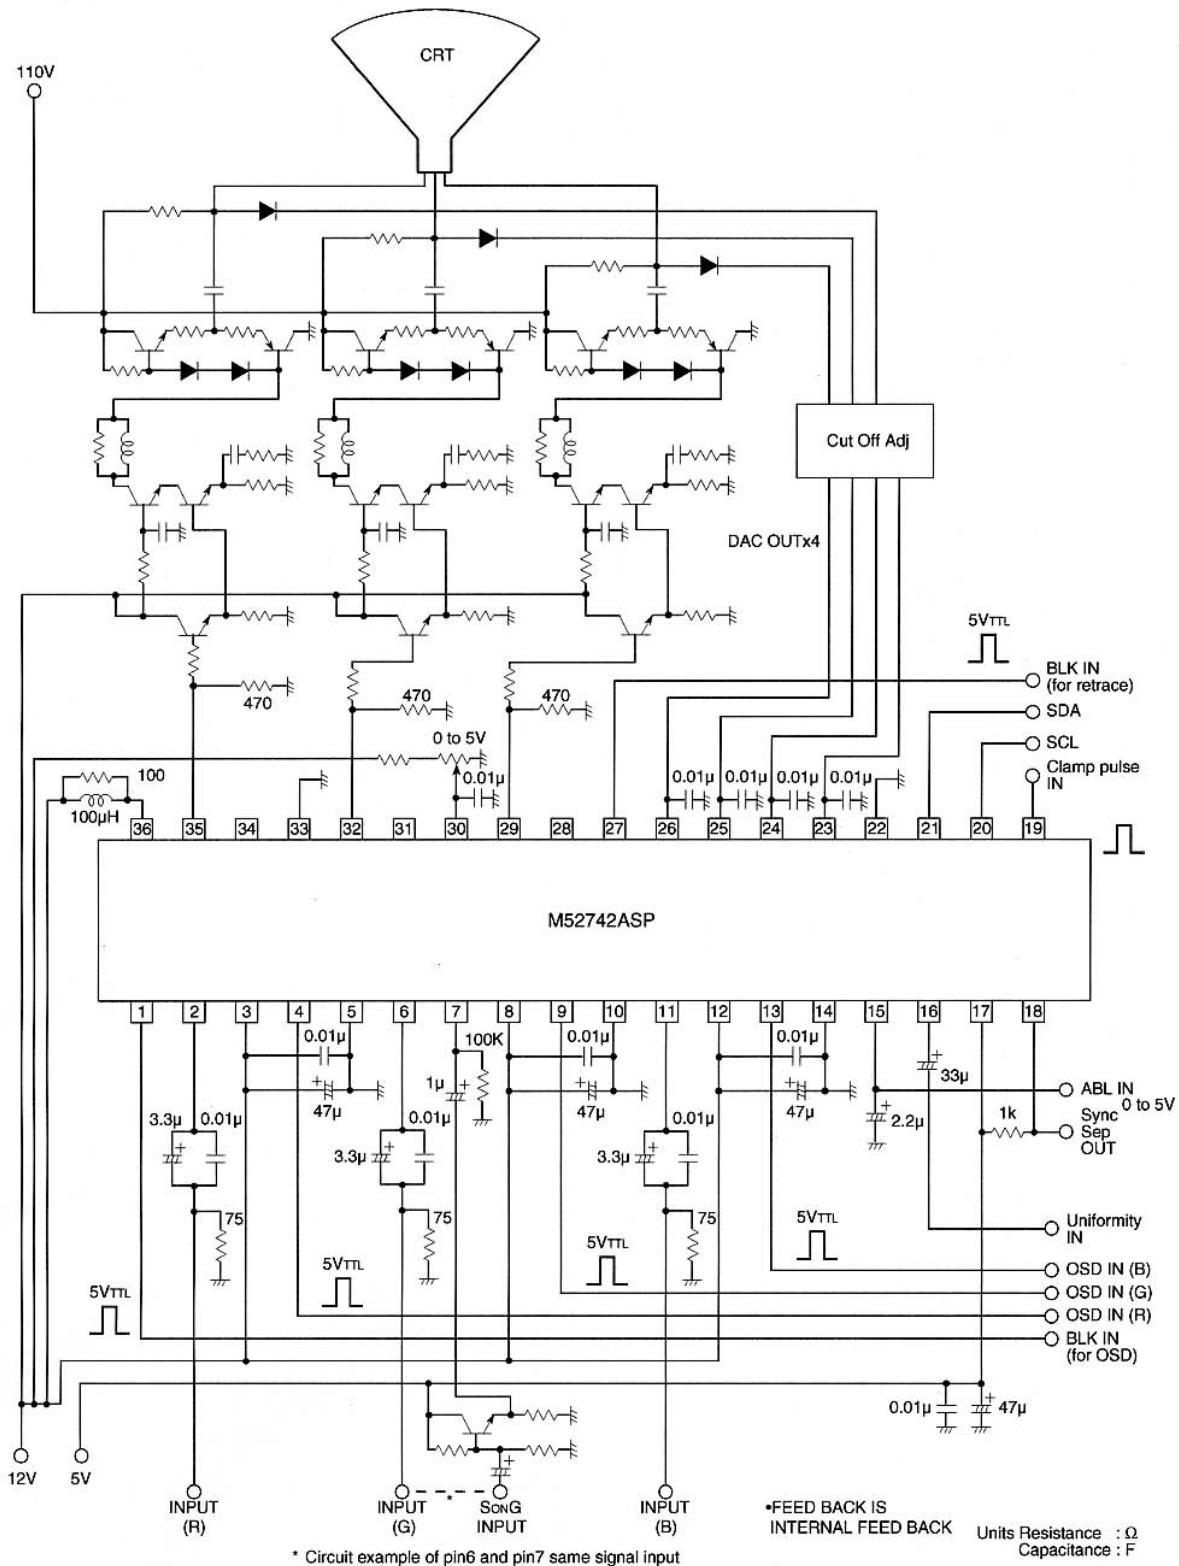








**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****DESCRIPTION OF PIN**

Pin No.	Name	DC voltage (V )	Peripheral circuit of pins	Description of function
1	OSD BLK IN	-		<p>•Input pulses</p> <p>•Connected to GND if not used.</p>
2 6 11	INPUT (R) INPUT (G) INPUT (B)	2.5		<p>•Clamped to about 2.5V due to clamp pulses from pin 19.</p> <p>•Input at low impedance.</p>
3 8 12	Vcc1 (R) Vcc1 (G) Vcc1 (B)	12	-	•Apply equivalent voltage to 3 channels.
4 9 13	OSD IN (R) OSD IN (G) OSD IN (B)	-		<p>•Input pulses</p> <p>•Connected to GND if not used.</p>
5 10 14 22 33	GND 1 (R) GND 1 (G) GND 1 (B) GND (5V) GND 2	GND	-	
7	INPUT (S on G)	When open 2.5V		<p>•SYNC ON GREEN input pin for sync separation. Sync is negative. input signal at Pin7, compare with the reference voltage of internal circuit in order to separate sync signal.</p> <p>•When not used, set to OPEN.</p>

**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****DESCRIPTION OF PIN (cont.)**

Pin No.	Name	DC voltage (V)	Peripheral circuit of pins	Description of function
15	ABL IN	When open 2.5V		<ul style="list-style-type: none"> <li>•ABL (Automatic Beam Limiter) input pin. Recommended voltage range is 0 to 5V. When ABL function is not used, set to 5V.</li> </ul>
16	Uniformity IN	5.75		<ul style="list-style-type: none"> <li>•Uniformity input pin. Recommended amplitude range is 0 to 5V<sub>P-P</sub>.</li> </ul>
17	Vcc (5V)	5	-	
18	S on G Sep OUT	-		<ul style="list-style-type: none"> <li>•Sync signal output pin, Being of open collector output type.</li> </ul>
19	Clamp Pulse IN	-		<ul style="list-style-type: none"> <li>•Input pulses</li> <li> </li> <li>•Input at low impedance.</li> </ul>
20	SCL	-		<ul style="list-style-type: none"> <li>•SCL of PC BUS (Serial clock line) <math>V_{TH}=2.3V</math></li> </ul>


**M52742ASP****BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR****DESCRIPTION OF PIN (cont.)**

Pin No.	Name	DC voltage (V )	Peripheral circuit of pins	Description of function
21	SDA	-		<ul style="list-style-type: none"> <li>•SDA of I<sup>2</sup>C BUS (Serial data line)</li> <li>V<sub>TH</sub>=2.3V</li> </ul>
23 24 25 26	D/A OUT	-		<ul style="list-style-type: none"> <li>•D/A output pin.</li> <li>Output voltage range is 0 to 5V, Min input current is 0.18mA when D / A output pin is 1V.</li> <li>Max output current is 1.0mA.</li> </ul>
27	Retrace BLK IN	-		<ul style="list-style-type: none"> <li>•Input pulses</li> <li></li> <li>•Connected to GND if not used.</li> </ul>
28 31 34	EXT Feed Back (B) EXT Feed Back (G) EXT Feed Back (R)	Variable		
29 32 35	OUTPUT (B) OUTPUT (G) OUTPUT (R)	Variable		<ul style="list-style-type: none"> <li>•A resistor is needed on the GND side.</li> <li>Set discretionally to maximum 15mA, depending on the required driving capacity.</li> </ul>
36	VCC2	12		<ul style="list-style-type: none"> <li>•Used to supply power to output emitter follower only.</li> </ul>

# M52742ASP

## BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

### DESCRIPTION OF PIN (cont.)

Pin No.	Name	DC voltage (V )	Peripheral circuit of pins	Description of function
30	Main Brightness	-		<ul style="list-style-type: none"> <li>It is recommended that the IC be used between pedestal voltage 2V and 3V.</li> </ul>

### APPLICATION METHOD FOR M52742ASP

#### CLAMP PULSE INPUT

Clamp pulse width is recommended


above 15kHz, 1.0μsec

above 30kHz, 0.5μsec

above 64kHz, 0.3μsec.


The clamp pulse circuit in ordinary set is a long round about way, and beside high voltage, sometimes connected to external terminal, it is very easy affected by large surge.

Therefore, the Fig. shown right is recommended.



#### EXT-FEED BACK

In case of application circuit example of lower figure, Set up R1, R2 which seems that the black level of the signal feedbacked from Power AMP is 1V, when the bottom of output signal is 1V.

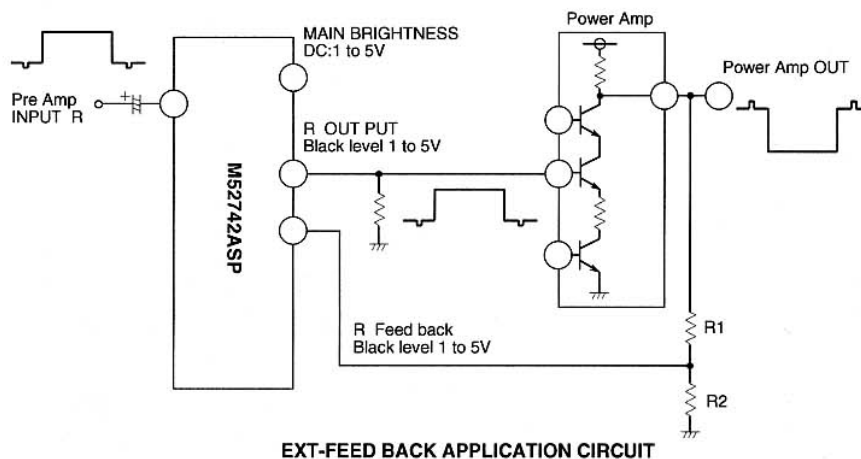

EXT-FEED BACK APPLICATION CIRCUIT


### NOTICE OF APPLICATION

- Make the nearest distance between output pin and pull down resistor.
- Recommended pedestal voltage of IC output signal is 2V.

M52742ASP

BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR

DETAILED DIAGRAM OF PACKAGE OUTLINE

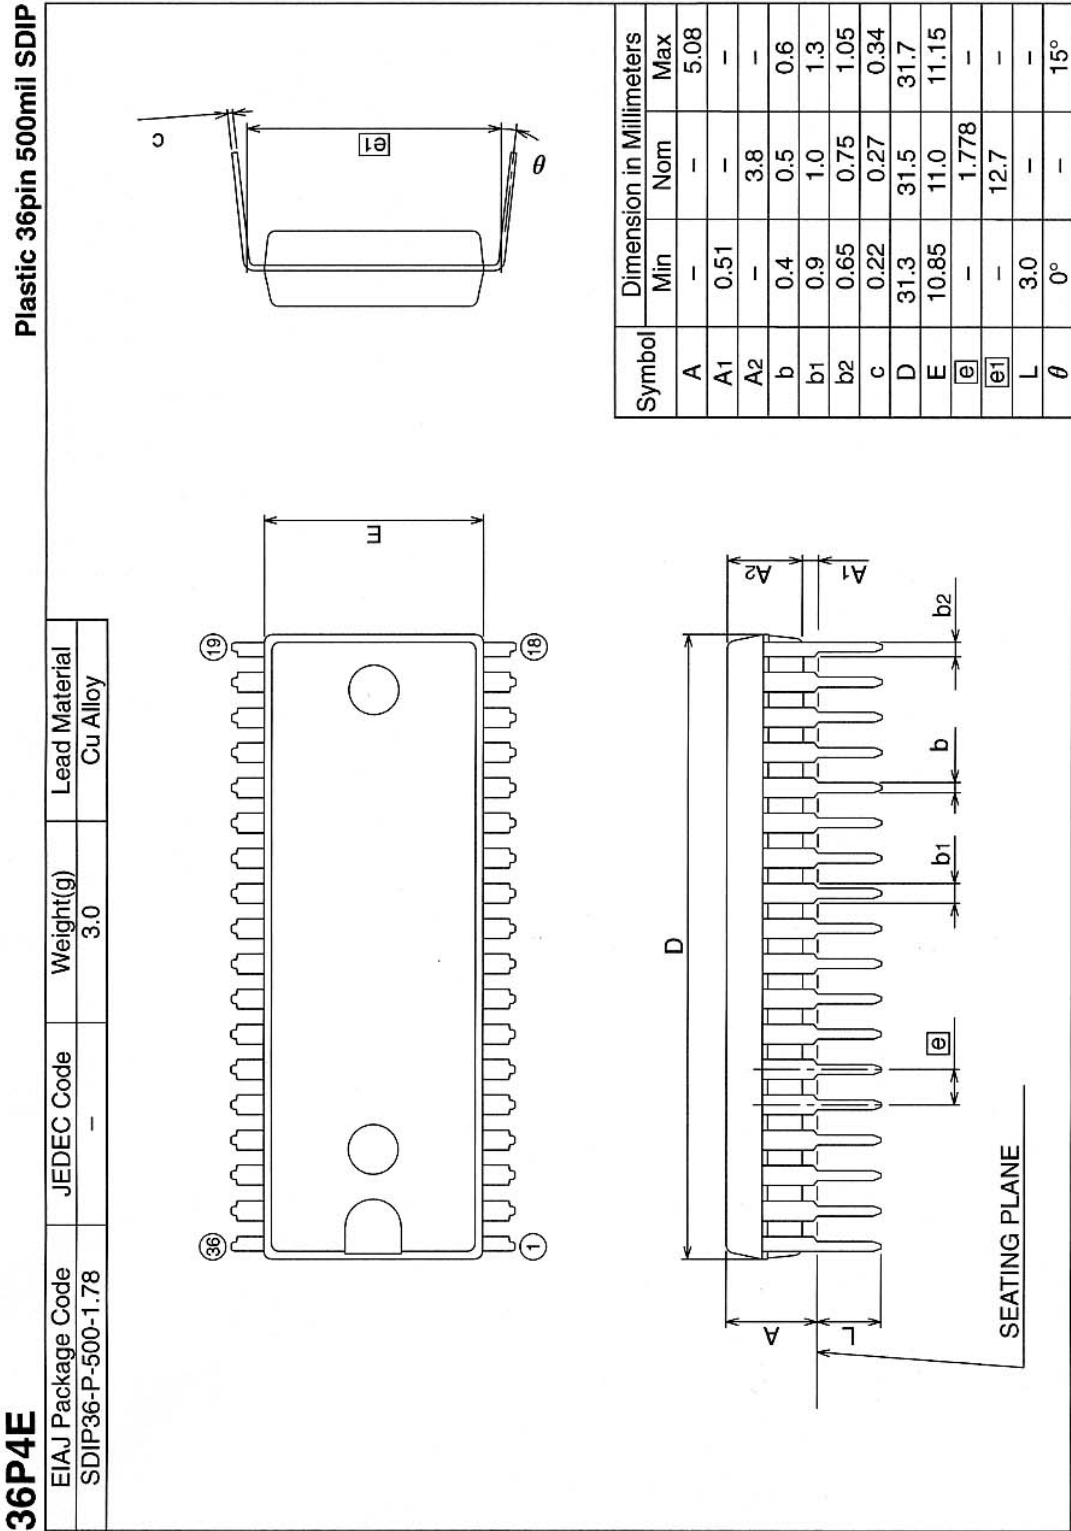

**BUS CONTROLLED 3-CHANNEL VIDEO PREAMP FOR CRT DISPLAY MONITOR**

---

Keep safety first in your circuit designs!

●Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

●These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.

●Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

●All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.mitsubishichips.com>).

●When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

●Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.

●The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.

●If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.

Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.

●Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.