


True 75 Ohm BNC Straight Cabled Plug - 3 Piece Solder or Crimp Captivated Contact



INCHES (MILLIMETERS)
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

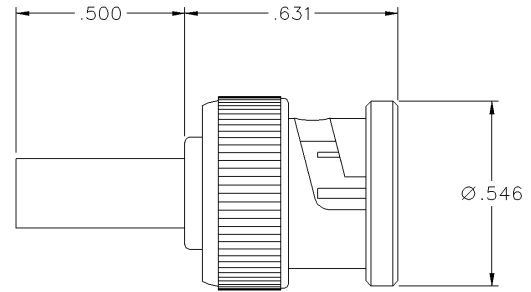

PART NUMBER	CABLE TYPE	CONTACT I.D.	BODY I.D.	FERRULE I.D.
CPMC-68-2	RG-59, 140, 302, Belden 9209A, 8279, 8241, 8263, Commscope 5563 Gepco VJ59U	.028 (0.71)	.152 (3.86)	.252 (6.40)
CPMC-68-3	Belden 8281, 9231, 9141, 735A Commscope 7501 VP618PVC	.036 (0.91)	.203 (5.16)	.330 (8.38)
CPMC-68-5	RG-6 Belden 8215	.033 (0.84)	.191 (4.85)	.355 (9.01)
CPMC-68-10	Belden 82108, 89108 Coleman 99969	.036 (0.91)	.149 (3.78)	.234 (5.94)
CPMC-68-18	Belden 8218	.021 (0.53)	.105 (3.81)	.180 (4.57)
CPMC-68-20	RG-179, 187 Belden 1520A	.016 (0.41)	.067 (1.70)	.128 (3.25)
CPMC-68-33	Belden 735A Commscope 735, Helex/Hitemp 735 BT3002, TZC75024	.021 (0.53)	.082 (2.08)	.160 (4.06)
CPMC-68-34	Belden 1855A, 720A Commscope 7538, Gepco 7538	.028 (0.71)	.105 (3.81)	.180 (4.57)
CPMC-68-35	Belden 1505A, 734A Commscope 5565, Gepco VPM2000	.036 (0.91)	.152 (3.86)	.252 (6.40)
CPMC-68-36	Belden 1695A Gepco VSD2001TS	.044 (1.12)	.176 (4.47)	.265 (6.73)
CPMC-68-45	Belden 1694A, 9248, Commscope 5765 Gepco VSD2001	.044 (1.12)	.187 (4.75)	.290 (7.37)
CPMC-68-50	Belden 1506A, 82259, 89259, Gepco VPM2000TK, VPM2000TS	.036 (0.91)	.138 (3.51)	.234 (5.94)

BNC Connectors - True 75 Ohm



Specifications

INCHES (MILLIMETERS)
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

Electrical Characteristics

Impedance: 75 Ohm
Frequency range: 0-3 GHz
VSWR:
BNC Cabled Plugs (except CPMC-68-18) 1.10 + .03 F (F in GHz)
CPMC-68-18 1.22 + .01 F (F in GHz)
BNC Adapters (In-series and Between-series) 1.03 + .02 F (F in GHz)
Working voltage: BNC Cabled Plugs and Adapters
(except CPMC-88-18, 20 and 33) 500 VRMS at sea level
CPMC-88-18, 20 and 33 335 VRMS at sea level
Dielectric withstanding voltage:
BNC Cabled Plugs and Adapters
(except CPMC-88-18, 20 and 33) 1500 VRMS at sea level
CPMC-88-18, 20 and 33 1000 VRMS at sea level
Insulation resistance: 5000 megohms minimum
Contact resistance:
Outer - Nickel plated initial 1.0 milliohm max,
after environmental 1.5 milliohm max
Center - Initial 3 milliohm max,
after environmental 4 milliohm max
Braid to Body - 2.5 milliohm max (nickel plated), after environ-
mental not applicable
Corona level: 375 volts minimum at 70,000 feet
RF High Potential Withstanding Voltage: 700 VRMS at 4 MHz

Operating temperature: -65° C to 165° C
Corrosion: MIL-STD-202, Method 101, Condition B
Shock: MIL-STD-202, Method 213, Condition B
Vibration: MIL-STD-202, Method 204, Condition B
Moisture resistance: MIL-STD-202, Method 106

Mechanical Characteristics

Durability: 500 cycles min
Force to engage/disengage: 5 lbs. max, after durability 5 lbs max; 1 lb. min.
Coupling nut retention: 75 lbs. min
Contact retention: 6 lbs. min axial force

Material Specifications

Body: Brass, nickel plated .0001 min over copper plated .00005 min
Contact: Brass, gold plated .00005 min over nickel plated .00005 min over copper plated .00005 min
Crimp Sleeve: Copper, nickel plate .0001 min over copper plated .00005 min
Nut: Zinc, nickel plated over copper plated
Insulator: Teflon
Spring Washer: Beryllium Copper (unplated)
Flat Washer: Steel, nickel plated
Gasket: Silicone rubber

Environmental Characteristics

(meets or exceeds the applicable paragraph of MIL-C-39012)
Thermal shock: MIL-STD-202, Method 107

True 75 Ohm BNC Plug and Jack Mating Engagement

