

SANYO

No. 4361

LA7674**Color TV Single-Chip Signal Processor for NTSC Systems (PLL Detection)****Overview**

The LA7674 improves upon the black-level, horizontal-jitter, switch-on drift performance of the single-chip LA7672 used to date. Also a single-chip IC, the LA7674 is for color TVs based on the NTSC (National Television System Committee) system with an on-chip circuit for all VIF, SIF, video, chroma and deflection signal processing.

Functions and Features**[VIF]**

- PLL detection (high video and audio quality)
- High-gain VIF amplifier
- High speed AGC
- On-chip APC time constant switch

[SIF]

- Simultaneous sound IN/OUT
- Video/audio simultaneous muting, or audio-only muting possible

[Audio-visual switch]

- Internal/external audio-visual switch ($V_{CC} = 9V$)

Delay line	Video external, audio external	Switch rating
OFF	IN	6.9 to 9.0V
OFF	EXT	4.7 to 6.6V
ON	EXT	2.4 to 4.3V
ON	IN	0 to 2.1V

[OSD]

- RGB 3 input
- RGB linear amplifier (-6dB input: 2V to 5V)
- Fast blanking (B input combined use)

[Chroma]

- On-chip ACC filter, On-chip killer filter, Killer-circuit hysteresis operation
- On-chip carrier filter

[Video]

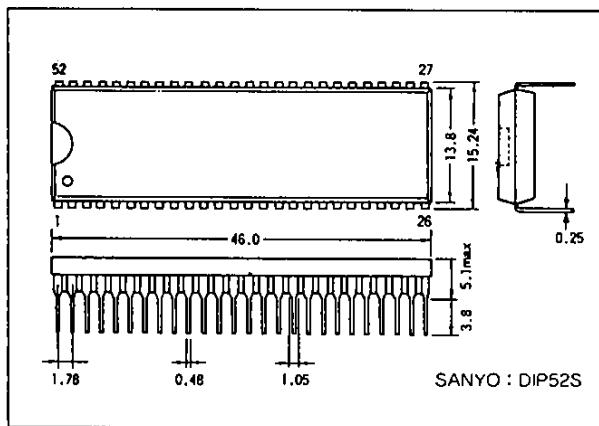
- Black enhancement
- DC playback
- On-chip delay line
- Wide band width (9MHz): delay line short
- Dual rank on-chip differentiation circuit also available for soft also
- S input supported (VCR application)
- Variable DC transmission volume available (externally attached circuit adjustment)

[Deflection]

- Adjustment-free horizontal, vertical synchronization
- Dual AFC system with excellent anti-noise characteristics
- External adjustment of vertical synchronization sensitivity
- Vertical size is constant with no-signal
- Highly stable image during playback of copy protected tapes (macro-vision tape etc.)
- High stability against VCR skew distortion

Package Dimensions

unit : mm

3128-DIP52S**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

41893TS A8-9533 No.4361-1/6

Specifications

Absolute Maximum Ratings at Ta = 25° C

				unit
Maximum supply voltage	V11 max		11	V
	V14 max		11	V
Maximum supply current	I30max		16	mA
Allowable power dissipation	Pd max	Ta ≤ 60°C	1.35	W
Operating temperature range	Topr		-10 to +65	°C
Storage temperature range	Tstg		-55 to +150	°C
Circuit current	I44		-6	mA
	I6		-3	mA
FBP input current	I22 max	Peak current	5	mA
	I21 max	Peak current	10	mA

Operating Conditions at Ta = 25° C

Recommended supply voltage	V11		9	V
	V14		9	V
Recommended supply current	I30		13	mA
Operating voltage range	V11op		8 to 9.5	V
	V14op		8 to 9.5	V
Operating current range	I30op		10 to 16	mA

Operating Characteristics at Ta = 25°C, V_{CC} = V11 = V14 = 9 V, I_{CC} = I30 = 13 mA

[Circuit Voltage and Current]

			min	typ	max	unit
Horizontal supply voltage	V30	V _{CC} = 9V, I _{CC} = 13mA	7.3	7.8	8.3	V
Supply current	I11 + 14	V _{CC} = 9V, I _{CC} = 13mA, I _F AGC 4V	102	120	138	mA

[VIF]

Quiescent video output voltage	V44	Quiescent	4.3	4.7	5.1	V
Quiescent AFT output voltage	V47	Quiescent	3.1	4.7	6.1	V
Maximum RFAGC voltage	V49H	CW = 85dB μ , RFAGCVR = min	7.6	8.0	8.3	V
Minimum RFAGC voltage	V49L	CW = 85dB μ , RFAGCVR = max	0	0.01	0.3	V
Input sensitivity	Vi	VIF input level for video output at 0.8Vp-p (40% mod).	33	39	45	dB μ
AGC range	GR	Maximum input (V0 = 0.8Vp-p) - input sensitivity	54	62	70	dB
Maximum permissible input	Vi max	VIF input level for video output at +1dB	97	104	111	dB μ
Video output detection	V _O 44	Vi = 80dB μ , AM = 78% mod	1.7	2.0	2.3	Vp-p
Differential gain	DG	Vi = 80dB μ , AM = 87.5%, video mod		3.0	10	%
Differential phase	DP	Vi = 80dB μ , AM = 87.5%, video mod		1.0	10	DEG
Video S/N	S/N	Vi = 80dB μ , 20 log $\frac{1.46(V_{p-p})}{\text{noise (Vrms)}}$	47	54	61	dB
Synchronization signal tip level	V44 TIP	CW = 80dB μ	2.1	2.4	2.7	V
Frequency characteristic	f _C	Frequency at video output of -3dB	6.0	9.0	12.0	MHz
920 kHz VIF intermodulation	I920	V3.58MHz/V920kHz, Vi = 80dB μ	35	42	49	dB
Maximum AFT output voltage	V47H	CW = 80dB μ , frequency change	8.3	8.7	9.0	V
Minimum AFT output voltage	V47L	CW = 80dB μ , frequency change	0.1	0.3	0.8	V
AFT detection sensitivity	Sf	CW = 80dB μ , frequency change	45	70	100	mV/kHz
AFT switch operation start voltage	V _{AFTSW}	Measuring with sweep signal	0.5	1.0	1.5	V
Black noise threshold level	V _{BTH}	Measuring with sweep signal	1.1	1.4	1.7	V
APC pull-in range (U)2	f _{PU-2}	CW = 80dB μ , f _p = 53MHz to 64MHz	0.8	1.7	4.0	MHz
APC pull-in range (L)2	f _{PL-2}	CW = 80dB μ , f _p = 53MHz to 64MHz		-2	-1	MHz
VCO maximum variable range	Δf _U	Quiescent	0.9	1.7	4.0	MHz
	Δf _L	Quiescent	-4	-2	-1	MHz
VCO control sensitivity	β	Quiescent	1.5	3.0	5.5	kHz/mV

[Audio-visual Switches]

Video output DC voltage	V38	Quiescent	3.0	3.4	3.8	V
Internal video input voltage	V42	Quiescent	4.4	4.8	5.2	V
External video input voltage	V40	Quiescent	4.4	4.8	5.2	V
External audio input voltage	V3	Quiescent	5.2	5.6	6.0	V

Continued on next page.

Continued from preceding page.			min	typ	max	unit
[SIF AF]						
SIF limiting voltage	Vi lim	SIF output level for detection output at -3dB	33	40	47	$\text{dB}\mu$
FM detection output voltage	V _{O1}	Vi = 100dB μ , $\Delta f = \pm 25\text{kHz}$	440	550	670	mVrms
FM detection output distortion ratio	THD	Vi = 100dB μ , $\Delta f = \pm 25\text{kHz}$	0	0.4	1.0	%
AM rejection	AMR	Vi = 100dB μ , FM : $\Delta f = \pm 25\text{kHz}$ AM : 30 %	40	60	80	dB
AF amplifier voltage gain	G _{AF}	Vi = 100mVrms, f = 400Hz	18	20	22	dB
AF maximum output voltage	V _{O6 max}	Output level for AF amplifier output distortion at 10%	2.0	2.8	3.6	Vrms
AF electronic attenuator range	ATT	Vi = 200mVrms, f = 400Hz	70	80	100	dB
[Video]						
Black enhancement threshold	B _{STH}	APL variable	40	50	60	IRE
Maximum black enhancement gain	BS max	APL variable	-35	-27	-20	IRE
Soft video tone variable range	ΔS_{soft}	f = 2MHz, 100mVp-p video tone VR: 4V → 0V	-6	-4	-2	dB
Sharp video tone variable range	ΔS_{sharp}	f = 2MHz, 100mVp-p video tone VR: 4V → 9V, contrast VR: 6V	7	10	13	dB
Video voltage gain audio-visual Switch 9V	GV9V	f = 100kHz, 100mVp-p, contrast VR: 9V, video tone VR: 4V	15	18	21	dB
Video voltage gain audio-visual Switch 0V	GV0V	f = 100kHz, 100mVp-p, contrast VR: 0V, video tone VR: 4V	15	18	21	dB
Contrast control center	C _{CEN}	f = 100kHz, 100mVp-p, contrast VR: 6V	0.4	0.48	0.57	Vp-p
Contrast variable control range	ΔC_V	Contrast VR: 3V → 9V	18	20	22	dB
Bright control	B R _H	Bright VR: 2V	5.5	6.5	7.5	V
	B R _{CEN}	Bright VR: 4.5V	3.1	3.6	4.1	V
	B R _L	Bright VR: 7.5V		0.3	1.2	V
D.L. off frequency characteristics	f _{V 9V}	Contrast VR: 6V, video tone VR: 4V, 3dB down	7	9		MHz
D.L. on frequency characteristics	f _{V 0V}	Contrast VR: 6V, video tone VR: 4V, 3dB down	2.5	3	4	MHz
DC transmission	R _{DC}	Input: stair step signal, 500mVp-p	100	103	106	%
Delay line delay	T _{DL}	Input: white 100%	290	340	390	ns
[Chroma]						
ACC amplitude characteristics	A _{CC1}	+6dB	-3	0	+3	dB
	A _{CC2}	-20dB	-7	0	+2	dB
ACC phase characteristics	A _{CCP1}	+6dB	-3	0	+3	°C
	A _{CCP2}	-20dB	-7	0	+7	°C
Killer operation point	E _K		-35	-28	-21	dB
Color control color residual	E _{C min}	Color VR: 0V, contrast VR: 9V			50	mVp-p
Color control center	E _{C CEN}	Color VR: 4.5V, contrast VR: 6V	1.2	1.8	2.4	Vp-p
Maximum demodulation output	E _{C max}	Color VR: 9V, contrast VR: 9V	3.2	4.0	4.8	Vp-p
Color contrast variable range	ΔC_C	Color VR: B - Y = 2.5Vp-p, contrast VR: 3V → 9V	17.5	19.5	21.5	dB
Tint control center	T _{CEN}	Tint VR: 4.5V, color VR: 4.5V, contrast VR: 6V	0	12	24	°C
Tint variable range	ΔT	Tint VR: 0V ← 4.5V → 8V, color VR: 4.5V, contrast VR: 6V	±40	±55	±70	°C
APC pull-in range	Δf_{APC}		±300	±500		Hz
Demodulator output ratio	R/B	Monochrome signal, contrast VR: 6V, color VR: B - Y = 1Vpo	0.81	0.90	0.98	
	G/B	Monochrome signal, contrast VR: 6V, color VR: B - Y = 1Vpo	0.24	0.30	0.38	
Demodulator phase angle	RB	Monochrome signal, contrast VR: 6V, color VR: B - Y = 1Vpo	97	105	113	DEG
	GB	Monochrome signal, contrast VR: 6V, color VR: B - Y = 1Vpo	-130	-120	-110	DEG
Demodulator output DC voltage	V _{C-Y}	Burst signal only, color VR: 0V	4.7	5.2	5.7	V
Demodulator output DC offset voltage	ΔV_{C-Y}	Burst signal only, color VR: 0V	-200	0	+200	mV
Demodulator output residual carrier	E _{car}	Quiescent, killer off, color VR: 0V			0.05	Vp-p

Continued on next page.

Continued from preceding page.

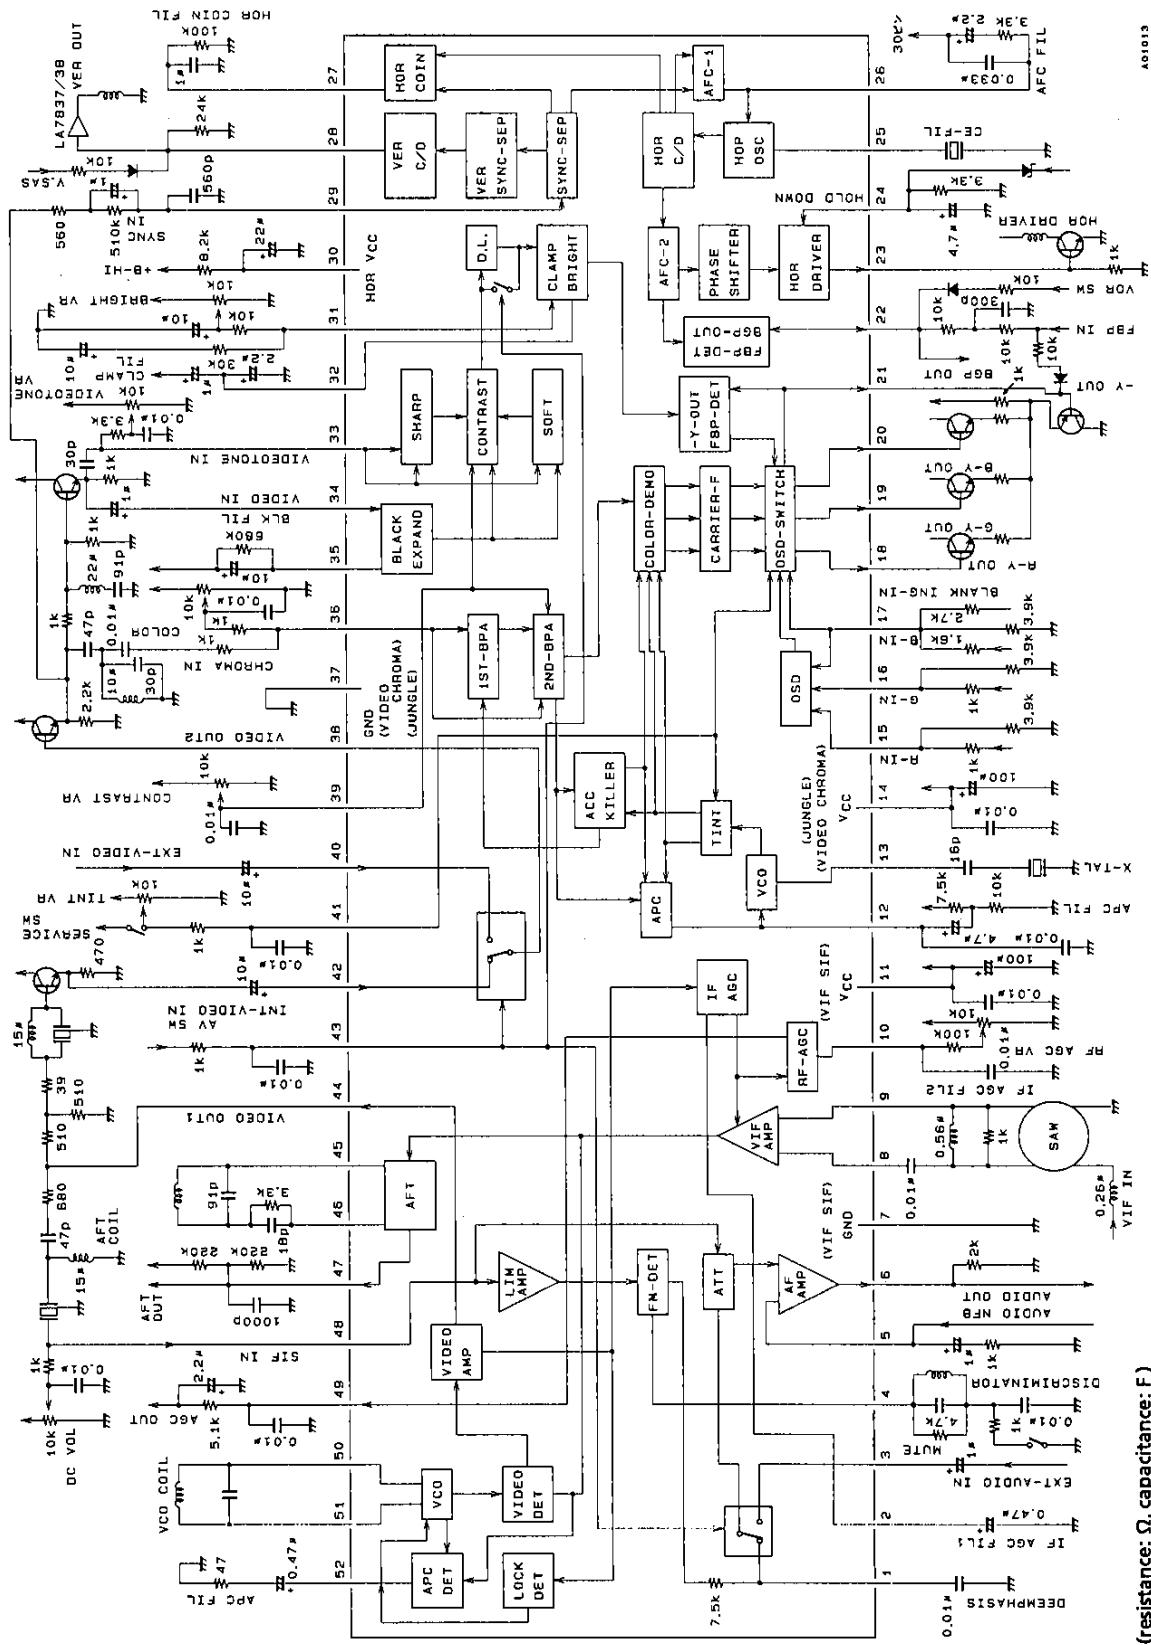
[OSD]

			min	typ	max	unit
Blanking pulse threshold level – Y out DC voltage (OSD mode)	TH _{BL} V _Y	C – IN: color bar, B – IN: variable B – IN : 1.5V	0.5 2.5	0.8 2.8	1.1 3.1	V
RGB – in threshold level	TH _R TH _G TH _B	R – IN: variable, B – IN: 1.5V G – IN: variable, B – IN: 1.5V B – IN, variable	1.9	2.2	2.5	V
RGB – Y out DC voltage (3 V)	V _{R3V} V _{G3V} V _{B3V}	R, G, B – IN : 3V	5.2	5.5	5.8	V
RGB – Y out DC voltage (4 V)	V _{R4V} V _{G4V} V _{B4V}	R, G, B – IN : 4V	5.7	6.0	6.3	V
RGB – Y out DC voltage (5 V)	V _{R5V} V _{G5V} V _{B5V}	R, G, B – IN : 5V	6.2	6.5	6.8	V

[Deflection]

Synchronization separator input DC level	V _{SDC}		6.0	6.3	6.6	V
Vertical free-running period	T _V free		262	262.5	263	H
Maximum vertical synchronization period	T _V max	Input: horizontal synchronization signal only	296.5	297	297.5	H
Minimum vertical synchronization period	T _V min		224.5	225	225.5	H
Vertical blanking pulse width	P _{W VBL}		20.25	20.5	20.75	H
Vertical blanking pulse wave	P _{H VBL}		7.0	7.5		V
Height value						
Vertical output pulse width	P _{W VOUT}		8.25	8.5	8.75	H
Vertical output voltage	V _{OUT H}		5.7	6	6.3	V
	V _{OUT M}		4.2	4.5	4.8	V
	V _{OUT L}			0.1	0.3	V
Vertical external trigger load resistance	R _{TR}		2.7	3.6		kΩ
Vertical automatic synchronization stop voltage	V _{SAS}			1.9	2.4	V
Vertical output pulse start V _{CC} voltage	S _{VV}			3	4	V
Horizontal free-running frequency deviation	Δf _H	Deviation from 15.734kHz	-90	30	150	Hz
Horizontal pull-in range	f _{H PULL}	Deviation from 15.734kHz	±400	±550		Hz
Horizontal output pulse width	P _{WH OUT}		21.8	23.8	25.8	μs
Horizontal output pulse phase	H _{PF}		15	17	19	μs
	H _{P CEN}		3.4	4.4	5.4	μs
	H _{PR}		0	3	6	μs
Horizontal output pulse start V _{CC} voltage	S _{HV}			4.5	5.3	V
AFC II FBP peak voltage	F _{BPH}		4.1	4.6	5.1	V
Burst gate pulse delay time	T _{d BGP}		0.2	0.6	1.2	μs
Burst gate pulse width	P _{W BGP}		2.7	3.7	4.7	μs
VCR SW input voltage	V _{CVR}			1.3	2.0	V
X-ray protector circuit operation input voltage	V _{HD}		0.64	0.74	0.84	V
Horizontal synchronization detection	H coin		4.2	4.5	4.8	V
Threshold level						
Horizontal output current	H _{OUT}	I _{CC} = 13mA	3.8	4.7	5.5	mA

Application Circuit Example

Unit (resistance: Ω , capacitance: F)

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.