

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC


TA8851CN

AUDIO / VIDEO SWITCH IC FOR TV WITH S-TERMINALS

The TA8851CN is an A/V SWITCH IC, which has 7 input channels and 2 output channels. Because the 2 output channels can be switched independently of each other, the TA8851CN allows you to configure a PIP system input switching circuit easily.

The TA8851CN can be interfaced easily to a microcontroller via the I²C bus.

3 of 7 input channels can be used for Y/C separated input.

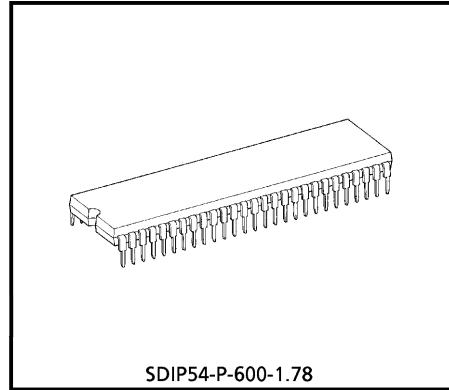

SDIP54-P-600-1.78

Weight : 1.0g (Typ.)

FEATURES

Video Stage

- Input

Composite video input : 7 channels
Y/C input : 3 channels

- Output

Composite video output : 2 channels (Main and Sub)
Y/C output : 2 channels (Main and Sub)

Audio Stage

- Input

L/R input : 7 channels

- Output

L/R output : 3 channels (2 of 3 depend on video, and the other is selectable from Main or Sub)


Functions

- I²C bus interface
- External mute circuit
- DAC output (3 outputs)
- Video clamp circuit
- Mode output
- ADC input (4 inputs)

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.


BLOCK DIAGRAM

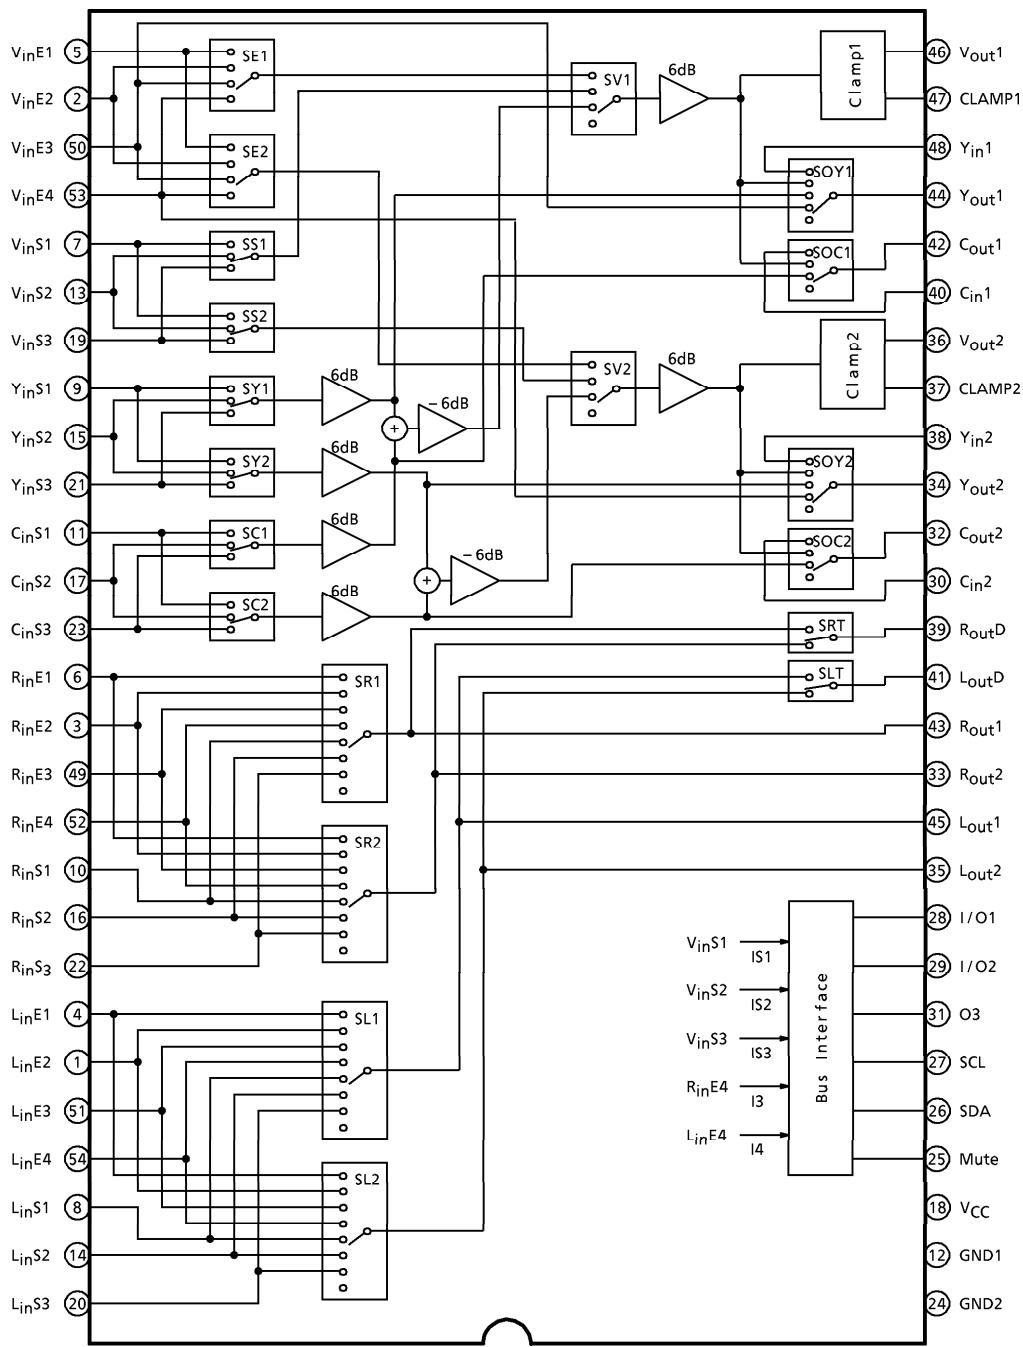

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

TERMINAL CONNECTION DIAGRAM

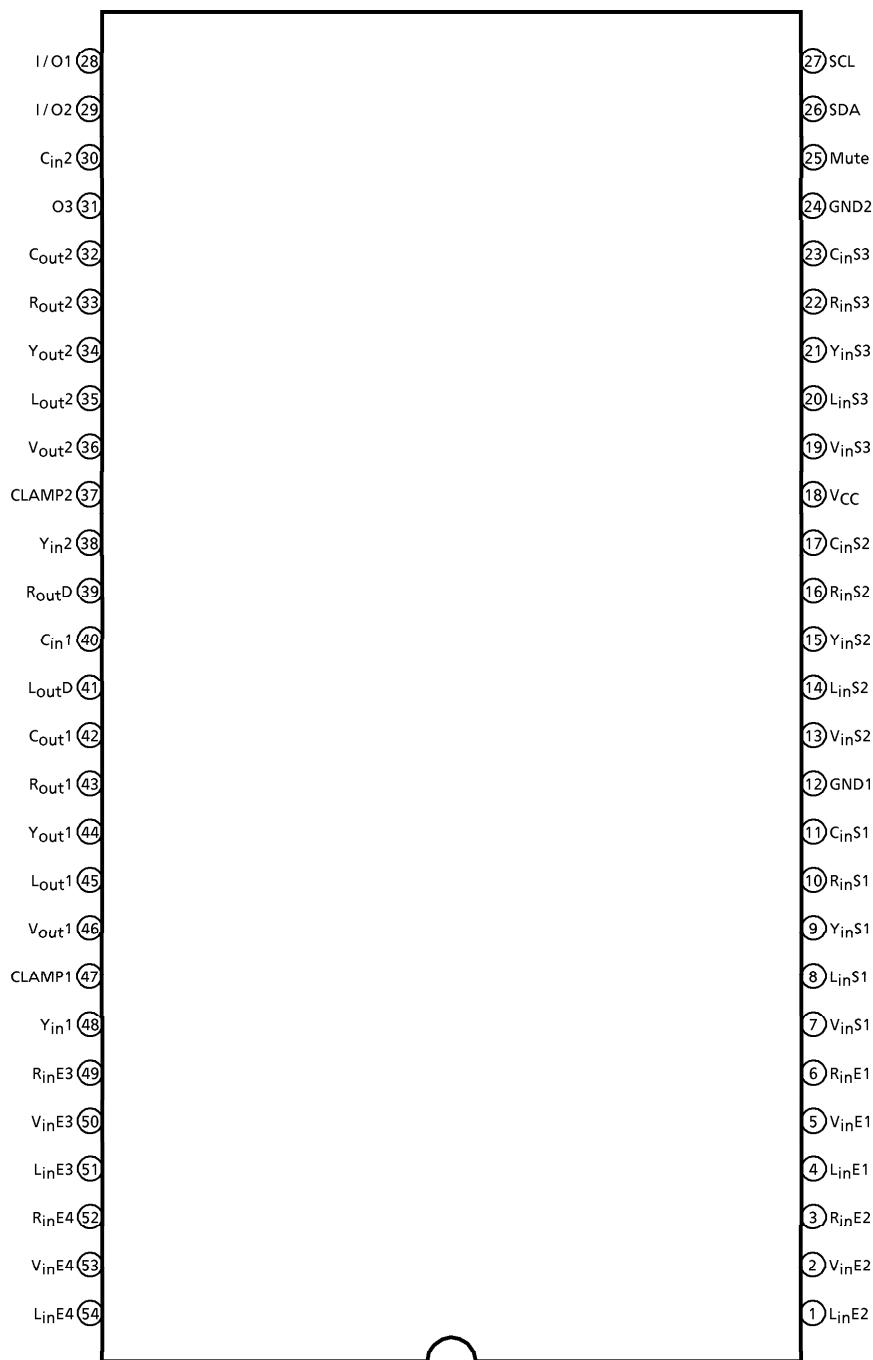

TERMINAL FUNCTION

PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT
2 : VinE2 5 : VinE1	Composite Video Signal Input	These pins are for composite video signal input. The recommendable input level is 1.0V _{p-p} .	
50 : VinE3 53 : VinE4	Composite Video Signal / Y Signal Input	These pins can be used for composite video signal or Y signal input. The recommendable input level is 1.0V _{p-p} .	
7 : VinS1 13 : VinS2 19 : VinS3	Composite Video Signal Input and S-Mode Switch	These pins are for composite video signal input and S mode Switch. By setting DC voltage of one of these pins lower than 2.6V, that channel (S1, S2 or S3) turns to S-mode. And when it is higher than 2.6V, that pin is for composite video input. The recommendable input level is 1.0V _{p-p} .	

PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT
9 : YinS1 15 : YinS2 21 : YinS3 11 : CinS1 17 : CinS2 23 : CinS3	Y Signal Input / C Signal Input	These pins accept a Y signal from the S-terminal and a C signal as input. The recommended input signal level is 1.0V _{p-p} for Y signal and 300mV _{p-p} for C signal (burst).	
4 : LinE1 6 : RinE1	Audio Input (TV)	These pins accept the sound of the internal TV signal as input. The signal input to this pin is output from the main/sub output after being selected, as well as from the TV audio output terminal. The recommended input signal level is 300mV _{rms} .	
52 : RinE4 54 : LinE4	Audio Input / ADC Input	These pins accept an audio signal as input. They also accept input from a 1bit ADC. In this case, if the voltage on these pins is below 2.3V the ADC outputs I ₃ and I ₄ become logic 1. The recommended input signal level is 300mV _{rms} .	
8 : LinS1 10 : RinS1 14 : LinS2 16 : RinS2 20 : LinS3 22 : RinS3 1 : LinE2 3 : RinE2 51 : LinE3 49 : RinE3	Audio Input	These pins accept an audio signal as input. The recommended input signal level is 300mV _{rms} .	

PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT
25 : Mute	Mute	If the voltage on this pin is above 1.5V, all audio outputs (main, sub, and TV) are disabled.	
46 : Vout1 36 : Vout2	Monitor Output	These pins output the selected composite signal. The standard output signal amplitude is 2.0V _{p-p} . These pins can sink a maximum current of 3.0mA.	
47 : CLAMP1 37 : CLAMP2	Clamp Filter	These pins are a filter terminal for the clamp circuit to maintain the monitor output at a constant DC level. If these pins are tied to GND, the clamp circuit is disabled, so that the DC voltage of the monitor output cannot be clamped to a constant level.	
48 : Yin1 40 : Cin1 38 : Yin2 30 : Cin2	Comb Y/C Input	These pins accept a Y/C separated signal from the comb filter as input. The recommended input signal level is 2.0V _{p-p} for Y signal and 600mV _{p-p} for C signal (burst).	

PIN No.	PIN NAME	FUNCTION	INTERFACE CIRCUIT
44 : Yout1 42 : Cout1 34 : Yout2 32 : Cout2	Y/C Output	These pins output the Y and C signals that are fed to the V/C/D circuits. The standard output signal level is 2.0V _{p-p} for Y signal and 600mV _{p-p} for C signal (burst). These pins can sink a maximum current of 2.5mA.	
28 : I/O1 29 : I/O2	I/O	These pins are for input and output to and from the 1bit DAC/ADC of the bus signal. These pins can source a maximum current of 2.0mA.	
31 : O3	O3	This pin is for output of the 1bit DAC of the bus signal. This pin can source a maximum current of 2.0mA.	
26 : SDA 27 : SCL	SCL/SDA	These pins are for input of the I ² C bus.	
33 : Rout2 35 : Lout2 39 : RoutD 41 : LoutD 43 : Rout1 45 : Lout1	Audio Output	These pins output an audio signal. These pins can sink a maximum current of 1.4mA.	

ADDRESS MAP

(Slave address 90H, 91H)

MODE	DATA No.	DATA							
Write	Data 1	D ₀₇	D ₀₆	D ₀₅	D ₀₄	D ₀₃	D ₀₂	D ₀₁	D ₀₀
		—	—	DAC Output				Sound Selection	Sound Mute
	Data 2 (main)	D ₁₇	D ₁₆	D ₁₅	D ₁₄	D ₁₃	D ₁₂	D ₁₁	D ₁₀
		Y/C Output Switching (0) (0) (0) (0)				F.VIDEO	Output Switching (0) (0) (0)		
Read	Data 4	D ₂₇	D ₂₆	D ₂₅	D ₂₄	D ₂₃	D ₂₂	D ₂₁	D ₂₀
		Y/C Output Switching (0) (0) (0) (0)				F.VIDEO	Output Switching (0) (0) (0)		
		D ₃₇	D ₃₆	D ₃₅	D ₃₄	D ₃₃	D ₃₂	D ₃₁	D ₃₀
		ADC Ident (0) (0) (0) (0)				S Input Ident			P.O.R (1)

F.VIDEO : Forced video mode

P.O.R : Power On reset (power : ON (1))

(0) (1) : preset

◎ Write mode

Output switching (main)

MODE		BUS DATA				S INPUT			OUTPUT SIGNAL			
		D ₁₃	D ₁₂	D ₁₁	D ₁₀	IS1	IS2	IS3	V _{out1}	R _{out1}	L _{out1}	
TV	E1	—	1	1	1	—	—	—	V _{inE1}	R _{inE1}	L _{inE1}	
	E2	—	1	1	0	—	—	—	V _{inE2}	R _{inE2}	L _{inE2}	
	E3	—	1	0	1	—	—	—	V _{inE3}	R _{inE3}	L _{inE3}	
	E4	—	1	0	0	—	—	—	V _{inE4}	R _{inE4}	L _{inE4}	
	S1	V	0	0	1	1	0	—	V _{inS1}	R _{inS1}	L _{inS1}	
		S	1				—		Y _{inS1} + C _{inS1}			
		—	—				1		—			
	S2	V	0	0	1	0	—	0	V _{inS2}	R _{inS2}	L _{inS2}	
		S	1				—	—	Y _{inS2} + C _{inS2}			
		—	—				1	—	—			
	S3	V	0	0	0	1	—	—	0	V _{inS3}	R _{inS3}	L _{inS3}
		S	1				—	—	Y _{inS3} + C _{inS3}			
		—	—				1	—	—			
Mute		—	0	0	0	—	—	—	Mute	Mute	Mute	

Output switching (sub)

MODE		BUS DATA				S INPUT			OUTPUT SIGNAL			
		D ₂₃	D ₂₂	D ₂₁	D ₂₀	IS1	IS2	IS3	V _{out2}	R _{out2}	L _{out2}	
TV	E1	—	1	1	1	—	—	—	V _{inE1}	R _{inE1}	L _{inE1}	
	E2	—	1	1	0	—	—	—	V _{inE2}	R _{inE2}	L _{inE2}	
	E3	—	1	0	1	—	—	—	V _{inE3}	R _{inE3}	L _{inE3}	
	E4	—	1	0	0	—	—	—	V _{inE4}	R _{inE4}	L _{inE4}	
	S1	V	0	0	1	1	0	—	V _{inS1}	R _{inS1}	L _{inS1}	
		S	1				—		Y _{inS1} + C _{inS1}			
		—	—				1		—			
	S2	V	0	0	1	0	—	0	V _{inS2}	R _{inS2}	L _{inS2}	
		S	1				—	—	Y _{inS2} + C _{inS2}			
		—	—				1	—	—			
	S3	V	0	0	0	1	—	—	0	V _{inS3}	R _{inS3}	L _{inS3}
		S	1				—	—	Y _{inS3} + C _{inS3}			
		—	—				1	—	—			
Mute		—	0	0	0	—	—	—	Mute	Mute	Mute	

Y/C output switching (main)

MODE		BUS DATA				OUTPUT SIGNAL	
		D17	D16	D15	D14	Y _{out} 1	C _{out} 1
Y	S-terminal Input	EXCEPT 0	0	1	1	Y _{in} S?	—
	Video Input			1	0	V _{out} 1	
	Comb1			0	1	Y _{in} 1	
	Comb2			0	0	V _{in} E3	
C	S-terminal Input	1	1	—	—	—	C _{in} S?
	Video Input	1	0				V _{out} 1
	Comb	0	1				C _{in} 1
	Mute	0	0			Mute	Mute

?: 1~3 (SY1、SC1 で選択)

Y/C output switching (sub)

MODE		BUS DATA				OUTPUT SIGNAL	
		D27	D26	D25	D24	Y _{out} 2	C _{out} 2
Y	S-terminal Input	EXCEPT 0	0	1	1	Y _{in} S?	—
	Video Input			1	0	V _{out} 2	
	Comb1			0	1	Y _{in} 2	
	Comb2			0	0	V _{in} E4	
C	S-terminal Input	1	1	—	—	—	C _{in} S?
	Video Input	1	0				V _{out} 2
	Comb	0	1				C _{in} 2
	Mute	0	0			Mute	Mute

?: 1~3 (SY2、SC2 で選択)

Mute mode

MODE			BUS		PIN 25	VIDEO OUTPUT				SOUND OUTPUT		
						MAIN		SUB		MAIN	SUB	Dual
			BIT	DATA		V _{out1}	Y _{out1} C _{out1}	V _{out2}	Y _{out2} C _{out2}	R _{out1} L _{out1}	R _{out2} L _{out2}	R _{outD} L _{outD}
Ext Mute			—	—	High level	—	—	—	—	Mute	Mute	Mute
Bus Line Mute	Sound Mute SW	Main	D ₀₀	1	—	—	—	—	—	Mute	—	—
		Sub	D ₀₁	1	—	—	—	—	—	—	Mute	—
	Video & Sound Mute SW	Main	D ₁₀	0	—	Mute	—	—	—	Mute	—	—
			D ₁₁	0	—	—	—	—	—	—	Mute	—
			D ₁₂	0	—	—	—	—	—	—	Mute	—
		Sub	D ₂₀	0	—	—	—	Mute	—	—	Mute	—
			D ₂₁	0	—	—	—	Mute	—	—	Mute	—
			D ₂₂	0	—	—	—	Mute	—	—	Mute	—
	Y/C Main	D ₁₄	0	—	—	Mute	—	—	—	—	—	—
		D ₁₅	0	—	—	—	—	—	—	—	—	—
	Y/C Sub	D ₂₄	0	—	—	—	—	Mute	—	—	—	—
		D ₂₅	0	—	—	—	—	Mute	—	—	—	—

DAC output

TERMINAL	BUS		OUTPUT
	BIT	DATA	
I/O1	D ₀₃	1	Open
		0	Low level
I/O2	D ₀₄	1	Open
		0	Low level
O3	D ₀₅	1	Open
		0	Low level

Dual Sound Selection

MODE	BUS		OUTPUT	
	BIT	DATA	R _{outD}	L _{outD}
MAIN	D ₀₂	1	Main Sound	Main Sound
		0	Sub Sound	Sub Sound

◎ Read mode
S-Output ident


TERMINAL	INPUT	BUS	
		BIT	DATA
V _{inS1}	L	D ₃₁	1
	H		0
V _{inS2}	L	D ₃₂	1
	H		0
V _{inS3}	L	D ₃₃	1
	H		0

ADC ident


TERMINAL	INPUT	BUS	
		BIT	DATA
I/O1	L	D ₃₄	1
	H		0
I/O2	L	D ₃₅	1
	H		0
I3	L	D ₃₆	1
	H		0
I4	L	D ₃₇	1
	H		0

MODE EXPLANATION


<S-terminal input mode>

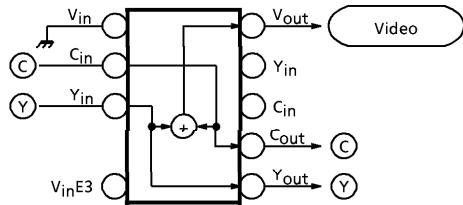


<Video input mode>

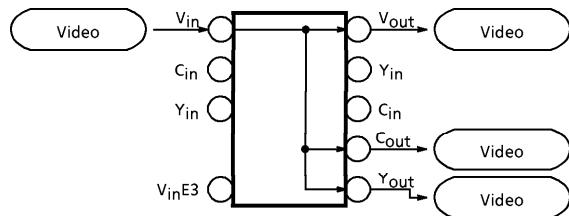

<Comb.1 input mode>

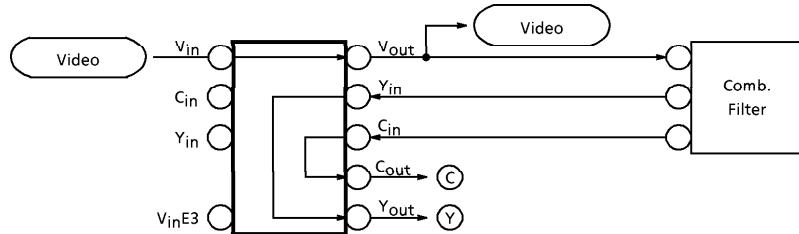


<Comb.2 input mode>

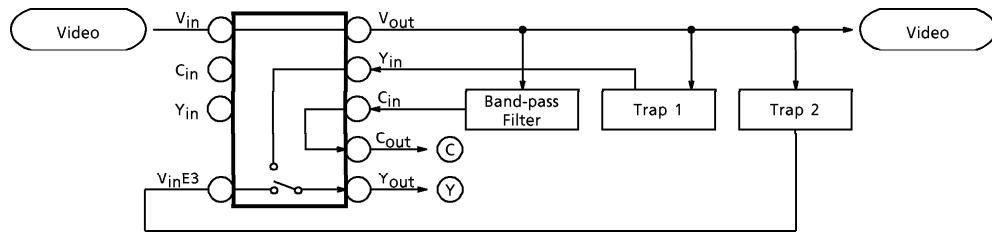

I²C BUS CONTROLLED FORMAT SUMMARY

Bus Controlled format of TA8851CN is based on I²C Bus Control format of Philips.

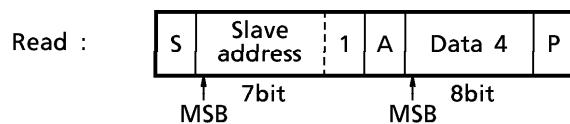
Data transfer format

S : Start Condition


P : Stop Condition

A : Acknowledge


(1) Start condition, stop condition

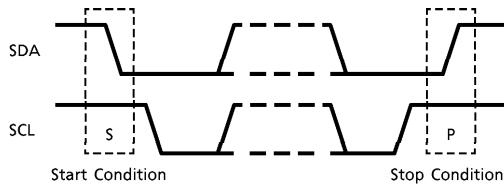

(2) Bit transfer

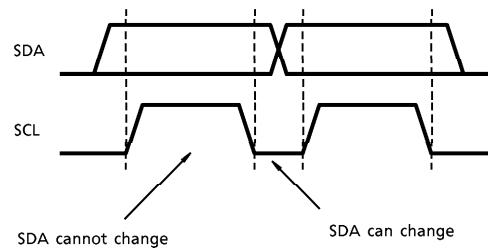

(3) Acknowledge

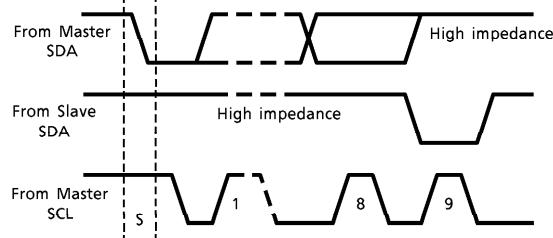

(4) Slave address


A6	A5	A4	A3	A2	A1	A0	R/W
1	0	0	1	0	0	0	1/0

Purchase of TOSHIBA I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	13	V
Power Dissipation	P _{Dmax}	1923 (Note)	mW
Input Signal Voltage	e _{in}	5	V _{p-p}
Operating Temperature	T _{opr}	-20~65	°C
Storage Temperature	T _{stg}	-55~150	°C

(Note) When using the device at above Ta = 25°C, decrease the power dissipation by 15.4mW for each increase of 1°C.

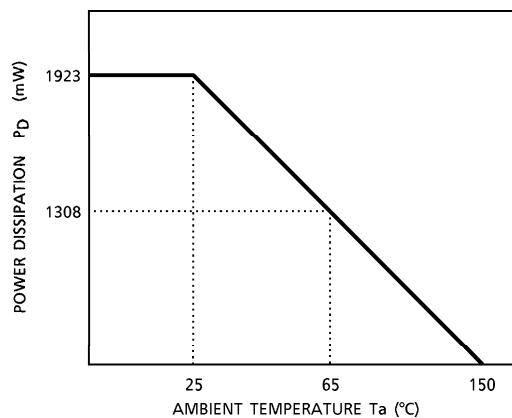**RECOMMENDED OPERATING CONDITION**

PIN No.	PIN NAME	MIN.	TYP.	MAX.	UNIT
18	V _{CC}	8.1	9.0	9.9	V

ELECTRICAL CHARACTERISTICS**DC CHARACTERISTICS**DC voltage characteristics (Unless otherwise specified, $V_{CC} = 9V$, $T_a = 25^\circ C$)

PIN No.	PIN NAME	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
1	L_{inE2}	V_1	1	—	5.0	5.2	5.4	V
2	V_{inE2}	V_2		—	5.0	5.2	5.4	
3	R_{inE2}	V_3		—	5.0	5.2	5.4	
4	L_{inE1}	V_4		—	5.0	5.2	5.4	
5	V_{inE1}	V_5		—	5.0	5.2	5.4	
6	R_{inE1}	V_6		—	5.0	5.2	5.4	
7	V_{inS1}	V_7		—	5.0	5.2	5.4	
8	L_{inS1}	V_8		—	5.0	5.2	5.4	
9	Y_{inS1}	V_9		—	5.0	5.2	5.4	
10	R_{inS1}	V_{10}		—	5.0	5.2	5.4	
11	C_{inS1}	V_{11}		—	5.0	5.2	5.4	
13	V_{inS2}	V_{13}		—	5.0	5.2	5.4	
14	L_{inS2}	V_{14}		—	5.0	5.2	5.4	
15	Y_{inS2}	V_{15}		—	5.0	5.2	5.4	
16	R_{inS2}	V_{16}		—	5.0	5.2	5.4	
17	C_{inS2}	V_{17}		—	5.0	5.2	5.4	
19	V_{inS3}	V_{19}		—	5.0	5.2	5.4	
20	L_{inS3}	V_{20}		—	5.0	5.2	5.4	
21	Y_{inS3}	V_{21}		—	5.0	5.2	5.4	
22	R_{inS3}	V_{22}		—	5.0	5.2	5.4	
23	C_{inS3}	V_{23}		—	5.0	5.2	5.4	
25	MUTE	V_{25}		—	—	1.5	—	
26	SDA	V_{26}		—	—	4.2	—	
27	SCL	V_{27}		—	—	4.2	—	
28	I/O1	V_{28}		—	8.5	9.0	—	
29	I/O2	V_{29}		—	8.5	9.0	—	
30	C_{in2}	V_{30}		—	5.0	5.2	5.4	
31	O3	V_{31}		—	8.5	9.0	—	
32	C_{out2}	V_{32}		—	3.4	3.7	4.0	
33	R_{out2}	V_{33}		—	3.7	4.0	4.3	
34	Y_{out2}	V_{34}		—	3.4	3.7	4.0	
35	L_{out2}	V_{35}		—	3.7	4.0	4.3	
36	V_{out2}	V_{36}		—	2.3	2.8	3.3	
37	CLAMP2	V_{37}		—	2.7	3.2	3.7	
38	Y_{in2}	V_{38}		—	5.0	5.2	5.4	
39	R_{outTV}	V_{39}		—	3.7	4.0	4.3	
40	C_{in1}	V_{40}		—	5.0	5.2	5.4	
41	L_{outTV}	V_{41}		—	3.7	4.0	4.3	
42	C_{out1}	V_{42}		—	3.4	3.7	4.0	
43	R_{out1}	V_{43}		—	3.7	4.0	4.3	

PIN No.	PIN NAME	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
44	Y _{out1}	V44	1	—	3.4	3.7	4.0	V
45	L _{out1}	V45		—	3.7	4.0	4.3	
46	V _{out1}	V46		—	2.3	2.8	3.3	
47	CLAMP1	V47		—	2.7	3.2	3.7	
48	Y _{in1}	V48		—	5.0	5.2	5.4	
49	R _{inE3}	V49		—	5.0	5.2	5.4	
50	V _{inE3}	V50		—	5.0	5.2	5.4	
51	L _{inE3}	V51		—	5.0	5.2	5.4	
52	R _{inE4}	V52		—	5.0	5.2	5.4	
53	V _{inE4}	V53		—	5.0	5.2	5.4	
54	L _{inE4}	V54		—	5.0	5.2	5.4	

DC current characteristics (Unless otherwise specified, V_{CC} = 9V, Ta = 25°C)

PIN No.	PIN NAME	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
18	V _{CC}	I _{CC}	1	—	48	60	80	mA

AC CHARACTERISTICS (Unless otherwise specified, V_{CC} = 9V, Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Clamp Current	I _{DIS}	2	Discharge current	11	17	28	μA
	I _{CHR}		charge current	0.50	1.25	1.80	mA
Output Resistance	R _{M-AUD}	2	—	50	100	150	Ω
	R _{S-AUD}		—	65	130	195	
	R _{T-AUD}		—	40	80	120	
	R _{M-VID}		—	25	50	75	
	R _{S-VID}		—	50	100	150	
	R _{M-Y/C}		—	25	50	75	
	R _{S-Y/C}		—	40	80	120	
Input Resistance	R _{iAUD}	2	—	49	70	100	kΩ
	R _{iVID}		—	20	30	40	
	R _{iY/C}		—	20	30	40	
Video Input Dynamic Range	(Main) V _{dVID1}	2	(Note 1)	1.6	2.1	—	V _{p-p}
	(Sub) V _{dVID2}			1.6	2.1	—	
	(Clamp off) V _{dVID3}			2.4	2.8	—	
Y/C Input Dynamic Range	(Main) V _{dY/C1}	2	(Note 2)	2.4	2.8	—	V _{p-p}
	(Sub) V _{dY/C2}			2.4	2.8	—	
Comb Input Dynamic Range	(Main) V _{dCOM1}	2	(Note 2)	5.1	6.5	—	V _{p-p}
	(Sub) V _{dCOM2}			5.1	6.5	—	
S Video Dynamic Range	(Main) V _{dS-V1}	2	(Note 3)	1.6	2.1	—	V _{p-p}
	(Sub) V _{dS-V2}			1.6	2.1	—	
	(Clamp off) V _{dS-V3}			2.4	2.8	—	
Monochrome Mode Dynamic Range	(Main) V _{dB/W1}	2	(Note 4)	1.6	2.1	—	V _{p-p}
	(Sub) V _{dB/W2}			1.6	2.1	—	

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Video Gain (Main) (Sub) (Clamp Off)	GVID1	2	(Note 5)	5.7	6.2	6.7	dB	
	GVID2			5.7	6.2	6.7		
	GVID3			5.8	6.3	6.8		
Y/C Gain (Main) (Sub)	GY/C1	2	(Note 6)	5.9	6.4	6.9	dB	
	GY/C2			5.9	6.4	6.9		
	GCOM1			-0.5	0	0.5		
Comb Gain (Main) (Sub)	GCOM2			-0.5	0	0.5		
	GS-V1	2	(Note 7)	5.7	6.2	6.7	dB	
	GS-V2			5.7	6.2	6.7		
S Video Gain (Main) (Sub) (Clamp Off)	GS-V3			6.0	6.5	7.0		
B/W Mode Gain (Main) (Sub)	GB/W1	2	(Note 8)	5.7	6.2	6.7	dB	
	GB/W2			5.7	6.2	6.7		
Video Switch Crosstalk (Main) (Sub) (Clamp Off)	CVID1	2	(Note 9)	50	60	—	dB	
	CVID2			50	60	—		
	CVID3			50	60	—		
Y Switch Crosstalk (Main) (Sub)	CY1	2	(Note 10)	50	60	—	dB	
	CY2			50	60	—		
C Switch Crosstalk (Main) (Sub)	CC1	2	(Note 11)	50	60	—	dB	
	CC2			50	60	—		
Video Mute Attenuation	GVM	2	(Note 13)	50	60	—	dB	
Video Frequency Response (Main) (Sub) (Clamp Off)	fVID1	2	(Note 14)	9.0	—	—	MHz	
	fVID2			9.0	—	—		
	fVID3			9.0	—	—		
Y/C Frequency Response (Main) (Sub)	fY/C1	2	(Note 15)	9.0	—	—	MHz	
	fY/C2			9.0	—	—		
Comb Frequency Response (Main) (Sub)	fCOM1	2	(Note 15)	9.0	—	—	MHz	
	fCOM2			9.0	—	—		
	fS-V1			9.0	—	—		
S Video Frequency Response (Main) (Sub) (Clamp Off)	fS-V2		(Note 16)	9.0	—	—	MHz	
	fS-V3			9.0	—	—		
B/W Mode Frequency Response (Main) (Sub)	fB/W1	2	(Note 17)	9.0	—	—	MHz	
	fB/W2			9.0	—	—		
Clamp Level	CL	2	(Note 18)	—	21	—	%	
Audio Dynamic Range	VdAUD	2	(Note 19)	5.0	6.0	—	V _{p-p}	
Audio Gain	GAUD	2	(Note 20)	-0.5	0	0.5	dB	
Audio Frequency Response	fAUD	2	(Note 21)	0.1	3.0	—	MHz	
Audio Switch Crosstalk	CAUD	2	(Note 22)	60	70	—	dB	
Audio Mute Attenuation	GAM	2	(Note 23)	60	70	—	dB	
Audio Select Offset	ΔVAUD	2	(Note 24)	-30	0	30	mV	
S Input Discriminating Voltage	V _{thS}	2	(Note 25)	2.4	2.6	2.8	V	
ADC Input Discriminating Voltage	V _{thADC}	2	(Note 26)	1.8	2.3	2.8	V	
External Mute-ON Voltage	V _{thMUTE}	2	(Note 27)	1.0	1.5	2.0	V	
DAC Output Low Level Voltage	V _{DAC}	2	(Note 28)	0	—	0.5	V	

TEST CONDITIONS		MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED), V _{CC} = 9V, T _a = 25 ± 3°C)			
NOTE	ITEM	SW MODE		MEASUREMENT METHOD	
1-(1) V Input Dynamic Range (Main)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , others-b / off S5-a , others-b / off S7A-a , others-b / off S13A-a, others-b / off S19A-a, others-b / off S50-a , others-b / off S53-a , others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	DATA 2	(1) V ₁ 15kHz, variable-amplitude input. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 46 is distorted.
1-(2) V Input Dynamic Range (Sub)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , others-b / off S5-a , others-b / off S7A-a , others-b / off S13A-a, others-b / off S19A-a, others-b / off S50-a , others-b / off S53-a , others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	DATA 3	(1) V ₁ 15kHz, Variable-amplitude input. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 36 is distorted.
1-(3) V Input Dynamic Range (Clamp Off) (Main)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , S47-on, others-b / off S5-a , S47-on, others-b / off S7A-a , S47-on, others-b / off S13A-a, S47-on, others-b / off S19A-a, S47-on, others-b / off S50-a , S47-on, others-b / off S53-a , S47-on, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	DATA 2	(1) V ₁ 15kHz, Variable-amplitude input, V ₃ = 0V. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 46 is distorted.
1-(4) V Input Dynamic Range (Clamp Off) (Sub)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , S37-on, others-b / off S5-a , S37-on, others-b / off S7A-a , S37-on, others-b / off S13A-a, S37-on, others-b / off S19A-a, S37-on, others-b / off S50-a , S37-on, others-b / off S53-a , S37-on, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	DATA 3	(1) V ₁ 15kHz, variable-amplitude input, V ₃ = 0V. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 36 is distorted.

NOTE		ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, Ta = 25 ± 3°C)		
			SW MODE	DATA 2	MEASUREMENT METHOD
2-(1) Dynamic Range (Main)	YC Input	Y _{in} S1	S9-a , others-b / off	11111011	
		Y _{in} S2	S15-a , others-b / off	11111010	Measure the amplitude in the same way using pin 44.
		Y _{in} S3	S21-a , others-b / off	11111001	
		Y _{in} 1	S48-a , others-b / off	0101****	
	YC Input	V _{in} E3	S50-a , others-b / off	0100****	
		C _{in} S1	S11-a , others-b / off	11111011	
		C _{in} S2	S17-a , others-b / off	11111010	Measure the amplitude in the same way using pin 42.
		C _{in} S3	S23-a , others-b / off	11111001	
2-(2) Dynamic Range (Sub)	YC Input	C _{in} 1	S40-a , others-b / off	0101****	
				DATA 3	
		Y _{in} S1	S9-a , others-b / off	11111011	
		Y _{in} S2	S15-a , others-b / off	11111010	Measure the amplitude in the same way using pin 34.
	YC Input	Y _{in} S3	S21-a , others-b / off	11111001	
		Y _{in} 2	S38-a , others-b / off	0101****	
		V _{in} E4	S53-a , others-b / off	0100****	
		C _{in} S1	S11-a , others-b / off	11111011	
3-(1) Dynamic Range (Main)	S Video	C _{in} S2	S17-a , others-b / off	11111010	Measure the amplitude in the same way using pin 32.
		C _{in} S3	S23-a , others-b / off	11111001	
		C _{in} 2	S30-a , others-b / off	0101****	
				DATA 2	
	S Video	Y _{in} S1	S9-a , others-b / off	11111011	
		Y _{in} S2	S15-a , others-b / off	11111010	Measure the amplitude in the same way using pin 46.
		Y _{in} S3	S21-a , others-b / off	11111001	
		C _{in} S1	S11-a , others-b / off	11111011	
3-(2) Dynamic Range (Sub)	S Video	C _{in} S2	S17-a , others-b / off	11111010	
		C _{in} S3	S23-a , others-b / off	11111001	
				DATA 3	
		Y _{in} S1	S9-a , others-b / off	11111011	
	S Video	Y _{in} S2	S15-a , others-b / off	11111010	Measure the amplitude in the same way using pin 36.
		Y _{in} S3	S21-a , others-b / off	11111001	
		C _{in} S1	S11-a , others-b / off	11111011	
		C _{in} S2	S17-a , others-b / off	11111010	
		C _{in} S3	S23-a , others-b / off	11111001	

TA8851CN - 19

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C)			
		SW & VR MODE		MEASUREMENT METHOD	
		SW MODE	DATA 2	SW MODE	DATA 3
3-(3)	S Video Dynamic Range (Clamp Off) (Main)	Y _{in} S1 Y _{in} S2 Y _{in} S3 C _{in} S1 C _{in} S2 C _{in} S3	S9-a , S47-on, others-b/off S15-a , S47-on, others-b/off S21-a , S47-on, others-b/off S11-a , S47-on, others-b/off S17-a , S47-on, others-b/off S23-a , S47-on, others-b/off	11111011 11111010 11111001 11111011 11111010 11111001	Measure the amplitude in the same way using pin 46.
3-(4)	S Video Dynamic Range (Clamp Off) (Sub)	Y _{in} S1 Y _{in} S2 Y _{in} S3 C _{in} S1 C _{in} S2 C _{in} S3	S9-a , S37-on, others-b/off S15-a , S37-on, others-b/off S21-a , S37-on, others-b/off S11-a , S37-on, others-b/off S17-a , S37-on, others-b/off S23-a , S37-on, others-b/off	11111011 11111010 11111001 11111011 11111010 11111001	Measure the amplitude in the same way using pin 36.
4-(1)	B/W Mode Dynamic Range (Main)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , others-b/off S5-a , others-b/off S7A-a , others-b/off S13A-a, others-b/off S19A-a, others-b/off S50-a , others-b/off S53-a , others-b/off	10100110 10100111 10100111 10100110 10100001 10100101 10100100	Measure the amplitude in the same way using pins 44 and 42 to find the smaller one.
4-(2)	B/W Mode Dynamic Range (Sub)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , others-b/off S5-a , others-b/off S7A-a , others-b/off S13A-a, others-b/off S19A-a, others-b/off S50-a , others-b/off S53-a , others-b/off	10100110 10100111 10100111 10100110 10100001 10100101 10100100	Measure the amplitude in the same way using pins 34 and 32 to find the smaller one.

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)					
		SW & VR MODE			MEASUREMENT METHOD		
		SW MODE	DATA 2	SW MODE	DATA 2	SW MODE	DATA 3
5-(1)	Video Gain (Main)	V_{inE2} V_{inE1} V_{inS1} V_{inS2} V_{inS3} V_{inE3} V_{inE4}	$S2-a$, others-b / off $S5-a$, others-b / off $S7A-a$, others-b / off $S13A-a$, others-b / off $S19A-a$, others-b / off $S50-a$, others-b / off $S53-a$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	(1) V_1 15kHz, 1Vp-p input. (2) For each, measure the amplitude on pin 46 to find the gain.	$S2-a$, others-b / off $S5-a$, others-b / off $S7A-a$, others-b / off $S13A-a$, others-b / off $S19A-a$, others-b / off $S50-a$, others-b / off $S53-a$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100
5-(2)	Video Gain (Sub)	V_{inE2} V_{inE1} V_{inS1} V_{inS2} V_{inS3} V_{inE3} V_{inE4}	$S2-a$, others-b / off $S5-a$, others-b / off $S7A-a$, others-b / off $S13A-a$, others-b / off $S19A-a$, others-b / off $S50-a$, others-b / off $S53-a$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	(1) V_1 15kHz, 1Vp-p input. (2) For each, measure the amplitude on pin 36 to find the gain.	$S2-a$, $S47-on$, others-b / off $S5-a$, $S47-on$, others-b / off $S7A-a$, $S47-on$, others-b / off $S13A-a$, $S47-on$, others-b / off $S19A-a$, $S47-on$, others-b / off $S50-a$, $S47-on$, others-b / off $S53-a$, $S47-on$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100
5-(3)	Video Gain (Clamp Off) (Main)	V_{inE2} V_{inE1} V_{inS1} V_{inS2} V_{inS3} V_{inE3} V_{inE4}	$S2-a$, $S37-on$, others-b / off $S5-a$, $S37-on$, others-b / off $S7A-a$, $S37-on$, others-b / off $S13A-a$, $S37-on$, others-b / off $S19A-a$, $S37-on$, others-b / off $S50-a$, $S37-on$, others-b / off $S53-a$, $S37-on$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	(1) V_1 15kHz, 1Vp-p input. (2) For each, measure the amplitude on pin 46 to find the gain.	$S2-a$, $S37-on$, others-b / off $S5-a$, $S37-on$, others-b / off $S7A-a$, $S37-on$, others-b / off $S13A-a$, $S37-on$, others-b / off $S19A-a$, $S37-on$, others-b / off $S50-a$, $S37-on$, others-b / off $S53-a$, $S37-on$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100
5-(4)	Video Gain (Clamp Off) (Sub)	V_{inE2} V_{inE1} V_{inS1} V_{inS2} V_{inS3} V_{inE3} V_{inE4}	$S2-a$, $S37-on$, others-b / off $S5-a$, $S37-on$, others-b / off $S7A-a$, $S37-on$, others-b / off $S13A-a$, $S37-on$, others-b / off $S19A-a$, $S37-on$, others-b / off $S50-a$, $S37-on$, others-b / off $S53-a$, $S37-on$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	(1) V_1 15kHz, 1Vp-p input. (2) For each, measure the amplitude on pin 36 to find the gain.	$S2-a$, $S37-on$, others-b / off $S5-a$, $S37-on$, others-b / off $S7A-a$, $S37-on$, others-b / off $S13A-a$, $S37-on$, others-b / off $S19A-a$, $S37-on$, others-b / off $S50-a$, $S37-on$, others-b / off $S53-a$, $S37-on$, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _A = 25 ± 3°C)			
		SW MODE	SW & VR MODE	DATA 2	MEASUREMENT METHOD
6-(1) Y / C Gain (Main)	Y _{in} S1	S9-a , others-b / off		11111011	
	Y _{in} S2	S15-a , others-b / off		11111010	Measure the amplitude in the same way using pin 44.
	Y _{in} S3	S21-a , others-b / off		11111001	
	Y _{in} I	S48-a , others-b / off		0101****	
	V _{in} E3	S50-a , others-b / off		0100****	
	C _{in} S1	S11-a , others-b / off		11111011	
	C _{in} S2	S17-a , others-b / off		11111010	Measure the amplitude in the same way using pin 42.
	C _{in} S3	S23-a , others-b / off		11111001	
	C _{in} I	S40-a , others-b / off		0101****	
			DATA 3		
6-(2) Y / C Gain (Sub)	Y _{in} S1	S9-a , others-b / off		11111011	
	Y _{in} S2	S15-a , others-b / off		11111010	Measure the amplitude in the same way using pin 34.
	Y _{in} S3	S21-a , others-b / off		11111001	
	Y _{in} I2	S38-a , others-b / off		0101****	
	V _{in} E4	S53-a , others-b / off		0100****	
	C _{in} S1	S11-a , others-b / off		11111011	
	C _{in} S2	S17-a , others-b / off		11111010	Measure the amplitude in the same way using pin 32.
	C _{in} S3	S23-a , others-b / off		11111001	
	C _{in} I2	S30-a , others-b / off		0101****	
			DATA 2		
7-(1) S Video Gain (Main)	Y _{in} S1	S9-a , others-b / off		11111011	
	Y _{in} S2	S15-a , others-b / off		11111010	Measure the amplitude in the same way using pin 46.
	Y _{in} S3	S21-a , others-b / off		11111001	
	C _{in} S1	S11-a , others-b / off		11111011	
	C _{in} S2	S17-a , others-b / off		11111010	
	C _{in} S3	S23-a , others-b / off		11111001	
			DATA 3		
				11111011	
				11111010	Measure the amplitude in the same way using pin 36.
				11111001	
7-(2) (Sub)				11111011	
				11111010	

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED), V _{CC} = 9V, T _a = 25 ± 3°C)		
		SW & VR MODE		MEASUREMENT METHOD
		SW MODE	DATA 2	
7-(3)	S Video Gain (Clamp Off) (Sub)	Y _{in} S1 Y _{in} S2 Y _{in} S3 C _{in} S1 C _{in} S2 C _{in} S3	S9-a , S37-on, others-b / off S15-a , S37-on, others-b / off S21-a , S37-on, others-b / off S11-a , S37-on, others-b / off S17-a , S37-on, others-b / off S23-a , S37-on, others-b / off	11111011 11111010 11111001 11111011 11111010 11111001
7-(4)	S Video Gain (Clamp Off) (Main)	Y _{in} S1 Y _{in} S2 Y _{in} S3 C _{in} S1 C _{in} S2 C _{in} S3	S9-a , S47-on, others-b / off S15-a , S47-on, others-b / off S21-a , S47-on, others-b / off S11-a , S47-on, others-b / off S17-a , S47-on, others-b / off S23-a , S47-on, others-b / off	11111011 11111010 11111001 11111011 11111010 11111001
8-(1)	B / W Mode Gain (Main)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4 V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , others-b / off S5-a , others-b / off S7A-a , others-b / off S13A-a , others-b / off S19A-a , others-b / off S50-a , others-b / off S53-a , others-b / off S2-a , others-b / off S5-a , others-b / off S7A-a , others-b / off S13A-a , others-b / off S19A-a , others-b / off S50-a , others-b / off S53-a , others-b / off	10100110 10100111 10100011 10100010 10100001 1010001 10100001 10100110 10100111 10100011 10100010 10100001 1010001 10100001 10100110 10100111 10100011 10100010 10100001 1010001 10100001

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)			
		SW & VR MODE		DATA 3	MEASUREMENT METHOD
		SW MODE			
8-(2) B /W Mode Gain (Sub)	V_{inE2}	S2-a , others-b/off		10100110	
	V_{inE1}	S5-a , others-b/off		10100111	
	V_{inS1}	S7A-a , others-b/off		10100011	Measure the amplitude in the same way using pin 34.
	V_{inS2}	S13A-a , others-b/off		10100010	
	V_{inS3}	S19A-a , others-b/off		10100001	
	V_{inE3}	S50-a , others-b/off		10100101	
	V_{inE4}	S53-a , others-b/off		10100100	
	V_{inE2}	S2-a , others-b/off		10100110	
	V_{inE1}	S5-a , others-b/off		10100111	
	V_{inS1}	S7A-a , others-b/off		10100011	Measure the amplitude in the same way using pin 32.
	V_{inS2}	S13A-a , others-b/off		10100010	
	V_{inS3}	S19A-a , others-b/off		10100001	
	V_{inE3}	S50-a , others-b/off		10100101	
	V_{inE4}	S53-a , others-b/off		10100100	

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, Ta = 25 ± 3°C)			
		SW & VR MODE		DATA 2	MEASUREMENT METHOD
		SW MODE	DATA 1		
9-(1) V Switch Crosstalk (Main)	V _{in} E2	All-b/off except those specified on the left	****0110	(1) V ₁ 3.58MHz, 1Vp-p input.	
	V _{in} E1	All-b/off except those specified on the left	****0111	(2) While sequentially switching S ₂ , S ₅ , S _{7A} , S ₉ , S ₁₁ , S _{13A} , S ₁₅ , S ₁₇ , S _{19A} , S ₂₁ , S ₂₃ , S ₃₀ , S ₃₈ , S ₄₀ , S ₄₈ , S ₅₀ , and S ₅₃ to 'a', measure the maximum level of crosstalk to pin 46 and find its ratio to output in selected mode.	
	V _{in} S1	All-b/off except those specified on the left	****0010		
	V _{in} S2	All-b/off except those specified on the left	****0011		
	V _{in} S3	All-b/off except those specified on the left	****0001		
	V _{in} E3	All-b/off except those specified on the left	****0101		
	V _{in} E4	All-b/off except those specified on the left	****0100		
	Y _{in} S1, C _{in} S1	All-b/off except those specified on the left	****1011		
	Y _{in} S2, C _{in} S2	All-b/off except those specified on the left	****1010		
	Y _{in} S3, C _{in} S3	All-b/off except those specified on the left	****1001		
9-(2) V Switch Crosstalk (Sub)	V _{in} E2	All-b/off except those specified on the left	DATA 3		
	V _{in} E1	All-b/off except those specified on the left	****0110		
	V _{in} S1	All-b/off except those specified on the left	****0111		
	V _{in} S2	All-b/off except those specified on the left	****0010		
	V _{in} S3	All-b/off except those specified on the left	****0011		
	V _{in} E3	All-b/off except those specified on the left	****0001		
	V _{in} E4	All-b/off except those specified on the left	****0101		
	Y _{in} S1, C _{in} S1	All-b/off except those specified on the left	****0100		
	Y _{in} S2, C _{in} S2	All-b/off except those specified on the left	****1011		
	Y _{in} S3, C _{in} S3	All-b/off except those specified on the left	****1010		
10-(1) Y Switch Crosstalk (Main)	Y _{in} S1	All-b/off except those specified on the left	DATA 2		
	Y _{in} S2	All-b/off except those specified on the left	11111011		
	Y _{in} S3	All-b/off except those specified on the left	11111010	Measure the maximum level of crosstalk in the same way using pin 44.	
	Y _{in} 1	All-b/off except those specified on the left	11111001		
	V _{in} E3	All-b/off except those specified on the left	0101****		
10-(2) Y Switch Crosstalk (Sub)	Y _{in} S1	All-b/off except those specified on the left	DATA 3		
	Y _{in} S2	All-b/off except those specified on the left	11111011		
	Y _{in} S3	All-b/off except those specified on the left	11111010	Measure the maximum level of crosstalk in the same way using pin 34.	
	Y _{in} 2	All-b/off except those specified on the left	0101****		
	V _{in} E3	All-b/off except those specified on the left	0100****		

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED), $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$		
		SW MODE	SW & VR MODE	DATA 2
11-(1)	C Switch Crosstalk (Main)	$C_{in}S1$ $C_{in}S2$ $C_{in}S3$ $C_{in}1$ $C_{in}2$	All b /off except those specified on the left All b /off except those specified on the left	11111011 11111010 11111001 0101****
11-(2)	C Switch Crosstalk (Sub)	$C_{in}S1$ $C_{in}S2$ $C_{in}S3$ $C_{in}1$ $C_{in}2$	All b /off except those specified on the left All b /off except those specified on the left	DATA 3 11111011 11111010 11111001 0101****
12-(1)	V Switch Crosstalk (Clamp Off) (Main)	$V_{in}E2$ $V_{in}E1$ $V_{in}S1$ $V_{in}S2$ $V_{in}S3$ $V_{in}E3$ $V_{in}E4$ $Y_{in}S1, C_{in}S1$ $Y_{in}S2, C_{in}S2$ $Y_{in}S3, C_{in}S3$	All b /off except those specified on the left All b /off except those specified on the left	DATA 2 *****0110 *****0111 *****0011 *****0010 *****0001 *****0101 *****0100 *****0111 *****1010 *****1001
12-(2)	V Switch Crosstalk (Clamp Off) (Sub)	$V_{in}E2$ $V_{in}E1$ $V_{in}S1$ $V_{in}S2$ $V_{in}S3$ $V_{in}E3$ $V_{in}E4$ $Y_{in}S1, C_{in}S1$ $Y_{in}S2, C_{in}S2$ $Y_{in}S3, C_{in}S3$	All b /off except those specified on the left All b /off except those specified on the left	DATA 3 *****0110 *****0111 *****0011 *****0010 *****0001 *****0101 *****0100 *****0111 *****1010 *****1001


NOTE		ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)		MEASUREMENT METHOD
			SW & VR MODE	SW MODE	
13	Mute Attenuation	V_{out1} Output	All-b/off except those specified on the left	****0000	(1) $V_1 = 3.58MHz$, 1V p-p input. (2) While sequentially switching S2, S5, S7A, S9, S11, S13A, S15, S17, S19A, S21, S23, S30, S38, S40, S48, S50, and S53 to 'a', measure the maximum level of crosstalk to pin 46 and find its ratio to output in selected mode.
		γ_{out1} Output	All-b/off except those specified on the left	00*****	Measure the maximum level of crosstalk in the same way using pin 44.
		C_{out1} Output	All-b/off except those specified on the left	00*****	Measure the maximum level of crosstalk in the same way using pin 42.
		V_{out2} Output	All-b/off except those specified on the left	DATA 3 ****0000	Measure the maximum level of crosstalk in the same way using pin 43.
		γ_{out2} Output	All-b/off except those specified on the left	00*****	Measure the maximum level of crosstalk in the same way using pin 36.
		C_{out2} Output	All-b/off except those specified on the left	00*****	Measure the maximum level of crosstalk in the same way using pin 34.
		V_{out1} Output (Clamp Off)	All-b/off except those specified on the left	DATA 2 ****0000	Measure the maximum level of crosstalk in the same way using pin 32.
		V_{out2} Output (Clamp Off)	All-b/off except those specified on the left	DATA 3 ****0000	(1) $S_{47} = ON$, $V_3 = 0V$ (2) Measure the maximum level of crosstalk in the same way using pin 46.
					(1) $S_{47} = ON$, $V_3 = 0V$ (2) Measure the maximum level of crosstalk in the same way using pin 36.

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C)		
		SW & VR MODE	SW MODE	DATA 2
14-(1) Video Frequency Response (Main)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , others-b / off S5-a , others-b / off S7A-a , others-b / off S13A-a, others-b / off S19A-a, others-b / off S50-a , others-b / off S53-a , others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	(1) V ₁ frequency-variable, 1V _{p-p} input. (2) For each, measure the output amplitude on pin 46 to find the frequency equivalent to -3dB.
14-(2) Video Frequency Response (Sub)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , others-b / off S5-a , others-b / off S7A-a , others-b / off S13A-a, others-b / off S19A-a, others-b / off S50-a , others-b / off S53-a , others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	DATA 3 (1) V ₁ 15kHz, 1V _{p-p} input (2) For each, measure the output amplitude on pin 36 to find the frequency equivalent to -3dB.
14-(3) Video Frequency Response (Clamp Off) (Main)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , S47-on, others-b / off S5-a , S47-on, others-b / off S7A-a , S47-on, others-b / off S13A-a, S47-on, others-b / off S19A-a, S47-on, others-b / off S50-a , S47-on, others-b / off S53-a , S47-on, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	DATA 2 (1) V ₁ frequency-variable, 1V _{p-p} input, V ₃ = 0V. (2) For each, measure the output amplitude on pin 46 to find the frequency equivalent to -3dB.
14-(4) Video Frequency Response (Clamp Off) (Sub)	V _{in} E2 V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4	S2-a , S37-on, others-b / off S5-a , S37-on, others-b / off S7A-a , S37-on, others-b / off S13A-a, S37-on, others-b / off S19A-a, S37-on, others-b / off S50-a , S37-on, others-b / off S53-a , S37-on, others-b / off	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100	DATA 3 (1) V ₁ frequency-variable, 1V _{p-p} input, V ₃ = 0V. (2) For each, measure the output amplitude on pin 36 to find the frequency equivalent to -3dB.

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _A = 25 ± 3°C)		
		SW MODE	SW & VR MODE	DATA 2
15-(1) Response (Main)	Y _{in} S1	S9-a , others-b / off	11111011	Measure the amplitude in the same way using pin 44.
	Y _{in} S2	S15-a , others-b / off	11111010	
	Y _{in} S3	S21-a , others-b / off	11111001	
	Y _{in} 1	S48-a , others-b / off	0101****	
	V _{in} E3	S50-a , others-b / off	0100****	Measure the amplitude in the same way using pin 42.
	C _{in} S1	S11-a , others-b / off	11111011	
	C _{in} S2	S17-a , others-b / off	11111010	
	C _{in} S3	S23-a , others-b / off	11111001	
15-(2) Response (Sub)	C _{in} 1	S40-a , others-b / off	0101****	DATA 3
	Y _{in} S1	S9-a , others-b / off	11111011	Measure the amplitude in the same way using pin 34.
	Y _{in} S2	S15-a , others-b / off	11111010	
	Y _{in} S3	S21-a , others-b / off	11111001	
	Y _{in} 2	S38-a , others-b / off	0101****	
	V _{in} E4	S53-a , others-b / off	0100****	Measure the amplitude in the same way using pin 32.
	C _{in} S1	S11-a , others-b / off	11111011	
	C _{in} S2	S17-a , others-b / off	11111010	
16-(1) Response (Main)	C _{in} S3	S23-a , others-b / off	11111001	Measure the amplitude in the same way using pin 46.
	C _{in} 2	S30-a , others-b / off	0101****	
	Y _{in} S1	S9-a , others-b / off	11111011	
	Y _{in} S2	S15-a , others-b / off	11111010	
	Y _{in} S3	S21-a , others-b / off	11111001	Measure the amplitude in the same way using pin 36.
	C _{in} S1	S11-a , others-b / off	11111011	
	C _{in} S2	S17-a , others-b / off	11111010	
	C _{in} S3	S23-a , others-b / off	11111001	
16-(2) Response (Sub)	Y _{in} S1	S9-a , others-b / off	11111011	DATA 3
	Y _{in} S2	S15-a , others-b / off	11111010	Measure the amplitude in the same way using pin 36.
	Y _{in} S3	S21-a , others-b / off	11111001	
	C _{in} S1	S11-a , others-b / off	11111011	
	C _{in} S2	S17-a , others-b / off	11111010	
	C _{in} S3	S23-a , others-b / off	11111001	

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)		
		SW MODE	SW & VR MODE	DATA 2
16-(3)	S Video Frequency Response (Clamp Off) (Main)	$Y_{in\ S1}$ $Y_{in\ S2}$ $Y_{in\ S3}$ $C_{in\ S1}$ $C_{in\ S2}$ $C_{in\ S3}$	S_9-a , $S47-on$, others-b/off $S15-a$, $S47-on$, others-b/off $S21-a$, $S47-on$, others-b/off $S11-a$, $S47-on$, others-b/off $S17-a$, $S47-on$, others-b/off $S23-a$, $S47-on$, others-b/off	11111011 11111010 11111001 11111011 11111010 11111001
16-(4)	S Video Frequency Response (Clamp Off) (Sub)	$Y_{in\ S1}$ $Y_{in\ S2}$ $Y_{in\ S3}$ $C_{in\ S1}$ $C_{in\ S2}$ $C_{in\ S3}$	S_9-a , $S37-on$, others-b/off $S15-a$, $S37-on$, others-b/off $S21-a$, $S37-on$, others-b/off $S11-a$, $S37-on$, others-b/off $S17-a$, $S37-on$, others-b/off $S23-a$, $S37-on$, others-b/off	11111011 11111010 11111001 11111011 11111010 11111001
17-(1)	B/W Mode Frequency Response (Main)	$V_{in\ E2}$ $V_{in\ E1}$ $V_{in\ S1}$ $V_{in\ S2}$ $V_{in\ S3}$ $V_{in\ E3}$ $V_{in\ E4}$	S_2-a , others-b/off S_5-a , others-b/off S_7A-a , others-b/off $S13A-a$, others-b/off $S19A-a$, others-b/off $S50-a$, others-b/off $S53-a$, others-b/off	10100110 10100111 10100011 10100010 10100001 10100101 10100100
		$V_{in\ E2}$ $V_{in\ E1}$ $V_{in\ S1}$ $V_{in\ S2}$ $V_{in\ S3}$ $V_{in\ E3}$ $V_{in\ E4}$	S_2-a , others-b/off S_5-a , others-b/off S_7A-a , others-b/off $S13A-a$, others-b/off $S19A-a$, others-b/off $S50-a$, others-b/off $S53-a$, others-b/off	10100110 10100111 10100011 10100010 10100001 10100101 10100100

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)		
		SW MODE	DATA 3	MEASUREMENT METHOD
17-(2) B / W Mode Frequency Response (sub)	V_{inE2}	S2-a , others-b / off	10100110	
	V_{inE1}	S5-a , others-b / off	10100111	
	V_{inS1}	S7A-a , others-b / off	10100011	Measure the amplitude in the same way using pin 34.
	V_{inS2}	S13A-a , others-b / off	10100010	
	V_{inS3}	S19A-a , others-b / off	10100001	
	V_{inE3}	S50-a , others-b / off	10100101	
	V_{inE4}	S53-a , others-b / off	10100100	
	V_{inE2}	S2-a , others-b / off	10100110	
	V_{inE1}	S5-a , others-b / off	10100111	
	V_{inS1}	S7A-a , others-b / off	10100011	Measure the amplitude in the same way using pin 32.
18 Clamp Level	V_{inS2}	S13A-a , others-b / off	10100010	
	V_{inS3}	S19A-a , others-b / off	10100001	
	V_{inE3}	S50-a , others-b / off	10100101	
	V_{inE4}	S53-a , others-b / off	10100100	
	V_{out1} Output	S2-a , others-b / off	DATA 2 ****0110	(1) Measure the voltage V_{CO} on pin 46 during no-signal intervals. (2) Input a V_1 NTSC signal. (3) Observe the waveform on pin 46 and find the V_{CO} level from the sync tip in percentage assuming that the SYNC signal level = 100%
	V_{out2} Output	S2-a , others-b / off	DATA 3 ****0110	Measure the V_{CO} level in the same way using pin 36.



NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)		
		SW MODE	SW & VR MODE	DATA 2
19	Audio L Dynamic Range	S1-a , others-b/off	*****0110	MEASUREMENT METHOD
		S4-a , others-b/off	*****0111	(1) V_2 1kHz, amplitude-variable input.
		S8-a , others-b/off	*****0011	(2) For each, measure the amplitude of
		S14-a , others-b/off	*****0010	V_1 at which the waveform on pin
		S20-a , others-b/off	*****0001	45 is distorted.
		S51-a , others-b/off	*****0101	(Data 1 D00 = 0 : mute off)
		S54A-a, others-b/off	*****0100	
				DATA 3
		S1-a , others-b/off	*****0110	
		S4-a , others-b/off	*****0111	
		S8-a , others-b/off	*****0011	Measure the amplitude in the same
		S14-a , others-b/off	*****0010	way using pin 35.
		S20-a , others-b/off	*****0001	(Data 1 D01 = 0 : mute off)
		S51-a , others-b/off	*****0101	
		S54A-a, others-b/off	*****0100	
				DATA 2,3
		S4-a , others-b/off	*****	Measure the amplitude in the same
				way using pin 41.
				(Data 1 D02 = 0 : mute off)

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)			MEASUREMENT METHOD
		SW MODE	VR MODE	DATA 2	
19	Audio R Dynamic Range	R _{in} E2	S _{3-a} , others-b / off	*****0110	
		R _{in} E1	S _{6-a} , others-b / off	*****0111	Measure the amplitude in the same way using pin 43. (Data 1 D ₀₀ = 0 : mute off)
		R _{in} S1	S _{10-a} , others-b / off	*****0011	
		R _{in} S2	S _{16-a} , others-b / off	*****0010	
		R _{in} S3	S _{22-a} , others-b / off	*****0001	
		R _{in} E3	S _{49-a} , others-b / off	*****0101	
		R _{in} E4	S _{52A-a} , others-b / off	*****0100	
				DATA 3	
		R _{in} E2	S _{3-a} , others-b / off	*****0110	
		R _{in} E1	S _{6-a} , others-b / off	*****0111	Measure the amplitude in the same way using pin 33. (Data 1 D ₀₁ = 0 : mute off)
		R _{in} S1	S _{10-a} , others-b / off	*****0011	
		R _{in} S2	S _{16-a} , others-b / off	*****0010	
		R _{in} S3	S _{22-a} , others-b / off	*****0001	
		R _{in} E3	S _{49-a} , others-b / off	*****0101	
		R _{in} E4	S _{52A-a} , others-b / off	*****0100	
				DATA 2, 3	Measure the amplitude in the same way using pin 39. (Data 1 D ₀₂ = 0 : mute off)
		R _{in} E1	S _{6-a} , others-b / off	*****	

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C)			MEASUREMENT METHOD
		SW MODE	SW & VR MODE	DATA 2	
20	Audio L Gain	L _{in} E2	S1-a , others-b / off	*****0110	
		L _{in} E1	S4-a , others-b / off	*****0111	(1) V ₂ 1kHz, 1Vpp input.
		L _{in} S1	S8-a , others-b / off	*****0011	(2) For each, measure the output
		L _{in} S2	S14-a , others-b / off	*****0010	amplitude on pin 45 to find the
		L _{in} S3	S20-a , others-b / off	*****0001	gain.
		L _{in} E3	S51-a , others-b / off	*****0101	(Data 1 D ₀₀ = 0 : mute off)
		L _{in} E4	S54A-a, others-b / off	*****0100	
				DATA 3	
		L _{in} E2	S1-a , others-b / off	*****0110	
		L _{in} E1	S4-a , others-b / off	*****0111	
		L _{in} S1	S8-a , others-b / off	*****0011	Find the gain in the same way using
		L _{in} S2	S14-a , others-b / off	*****0010	pin 35.
		L _{in} S3	S20-a , others-b / off	*****0001	(Data 1 D ₀₁ = 0 : mute off)
		L _{in} E3	S51-a , others-b / off	*****0101	
		L _{in} E4	S54A-a, others-b / off	*****0100	
				DATA 2, 3	
		L _{in} E1	S4-a , others-b / off	*****	Find the gain in the same way using
					pin 41.
					(Data 1 D ₀₂ = 0 : mute off)

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, VCC = 9V, Ta = 25 ± 3°C)		
		SW MODE	DATA 2	MEASUREMENT METHOD
20	R _{in} E2	S3-a , others-b / off	****0110	
	R _{in} E1	S6-a , others-b / off	****0111	
	R _{in} S1	S10-a , others-b / off	****0011	Find the gain in the same way using pin 43.
	R _{in} S2	S16-a , others-b / off	****0010	
	R _{in} S3	S22-a , others-b / off	****0001	(Data 1 D00 = 0 : mute off)
	R _{in} E3	S49-a , others-b / off	****0101	
	R _{in} E4	S52A-a, others-b / off	****0100	
			DATA 3	
	R _{in} E2	S3-a , others-b / off	****0110	
	R _{in} E1	S6-a , others-b / off	****0111	
20	R _{in} S1	S10-a , others-b / off	****0011	Find the gain in the same way using pin 33.
	R _{in} S2	S16-a , others-b / off	****0010	
	R _{in} S3	S22-a , others-b / off	****0001	(Data 1 D01 = 0 : mute off)
	R _{in} E3	S49-a , others-b / off	****0101	
	R _{in} E4	S52A-a, others-b / off	****0100	
			DATA 2, 3	
	R _{in} E1	S6-a , others-b / off	*****	Find the gain in the same way using pin 39.
				(Data 1 D02 = 0 : mute off)

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)			MEASUREMENT METHOD
		SW MODE	VR MODE	DATA 2	
21	Audio L Frequency Response	L _{in} E2	S1-a , others-b / off	*****0110	
		L _{in} E1	S4-a , others-b / off	*****0111	(1) V_2 frequency-variable, 1V _{p-p} input.
		L _{in} S1	S8-a , others-b / off	*****0011	(2) Measure the output amplitude on
		L _{in} S2	S14-a , others-b / off	*****0010	pin 45 and find the frequency
		L _{in} S3	S20-a , others-b / off	*****0001	equivalent to -3dB.
		L _{in} E3	S51-a , others-b / off	*****0101	(Data 1 D00=0 : mute off)
		L _{in} E4	S54A-a, others-b / off	*****0100	
				DATA 3	
		L _{in} E2	S1-a , others-b / off	*****0110	
		L _{in} E1	S4-a , others-b / off	*****0111	
		L _{in} S1	S8-a , others-b / off	*****0011	Measure the amplitude in the same
		L _{in} S2	S14-a , others-b / off	*****0010	way using pin 35.
		L _{in} S3	S20-a , others-b / off	*****0001	(Data 1 D01=0 : mute off)
		L _{in} E3	S51-a , others-b / off	*****0101	
		L _{in} E4	S54A-a, others-b / off	*****0100	
				DATA 2, 3	
		L _{in} E1	S4-a , others-b / off	*****	Measure the amplitude in the same
					way using pin 41.
					(Data 1 D02=0 : mute off)

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C)			MEASUREMENT METHOD
		SW MODE	VR MODE	DATA 2	
21	RinE2	S3-a , others-b/off	*****0110		
	RinE1	S6-a , others-b/off	*****0111		
	RinS1	S10-a , others-b/off	*****0011		
	RinS2	S16-a , others-b/off	*****0010		
	RinS3	S22-a , others-b/off	*****0001		
	RinE3	S49-a , others-b/off	*****0101		
	RinE4	S52A-a, others-b/off	*****0100		
	RinE2	S3-a , others-b/off	DATA 3		
	RinE1	S6-a , others-b/off	*****0110		
	RinS1	S10-a , others-b/off	*****0111		
21	RinS2	S16-a , others-b/off	*****0011		
	RinS3	S22-a , others-b/off	*****0010		
	RinE3	S49-a , others-b/off	*****0001		
	RinE4	S52A-a, others-b/off	*****0101		
	RinE1	S4-a , others-b/off	*****0100		
	RinE2	S3-a , others-b/off	DATA 2, 3		
	RinS1	S6-a , others-b/off	*****0110		
	RinS2	S10-a , others-b/off	*****0111		
	RinS3	S16-a , others-b/off	*****0011		
	RinE3	S22-a , others-b/off	*****0010		
21	RinE4	S49-a , others-b/off	*****0001		
	RinE1	S52A-a, others-b/off	*****0101		
	RinE2	S3-a , others-b/off	*****0100		
	RinS1	S6-a , others-b/off	*****0110		
	RinS2	S10-a , others-b/off	*****0111		
	RinS3	S16-a , others-b/off	*****0011		
	RinE3	S22-a , others-b/off	*****0010		
	RinE4	S49-a , others-b/off	*****0001		
	RinE1	S52A-a, others-b/off	*****0101		
	RinE2	S3-a , others-b/off	*****0100		

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C)		
		SW & VR MODE		MEASUREMENT METHOD
		SW MODE	DATA 2	
22	LinE2	All-b-off except those specified on the left	****0110	(1) V ₂ 1kHz, 1V-p-p input.
	LinE1	All-b-off except those specified on the left	****0111	(2) While sequentially switching S ₁ , S ₃ , S ₄ , S ₆ , S ₁₀ , S ₁₄ , S ₁₆ , S ₂₀ , S ₂₂ , S ₄₉ , S ₅₁ , S _{52A} , and S _{54A} to 'a', measure the maximum level of crosstalk to pin 45 and find its ratio to selected output. (Data 1 D ₀₀ = 0 : mute off)
	LinS1	All-b-off except those specified on the left	****0011	
	LinS2	All-b-off except those specified on the left	****0010	
	LinS3	All-b-off except those specified on the left	****0001	
	LinE3	All-b-off except those specified on the left	****0101	
	LinE4	All-b-off except those specified on the left	****0100	
	L Switch Crosstalk	All-b-off except those specified on the left All-b-off except those specified on the left	DATA 3	****0110 ****0111 ****0011 ****0010 ****0001 ****0101 ****0100 ****0100 ****0100 ****0100
				Measure the maximum level of crosstalk in the same way using pin 35. (Data 1 D ₀₁ = 0 : mute off)


NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _A = 25 ± 3°C)			MEASUREMENT METHOD
		SW & VR MODE	SW MODE	DATA 2	
22	R Switch Crosstalk	RinE2	Allb/off except those specified on the left	*****0110	Measure the maximum level of crosstalk in the same way using pin 43. (Data 1 D ₀₀ = 0 : mute off)
		RinE1	Allb/off except those specified on the left	*****0111	
		RinS1	Allb/off except those specified on the left	****0011	
		RinS2	Allb/off except those specified on the left	****0010	
		RinS3	Allb/off except those specified on the left	****0001	
		RinE3	Allb/off except those specified on the left	****0101	Measure the maximum level of crosstalk in the same way using pin 33. (Data 1 D ₀₁ = 0 : mute off)
		RinE4	Allb/off except those specified on the left	****0100	
				DATA 3	
		RinE2	Allb/off except those specified on the left	*****0110	
		RinE1	Allb/off except those specified on the left	*****0111	
TV-L Crosstalk	TV-L Crosstalk	RinS1	Allb/off except those specified on the left	****0011	Measure the maximum level of crosstalk in the same way using pin 41. (Data 1 D ₀₂ = 0 : mute off)
		RinS2	Allb/off except those specified on the left	****0010	
TV-R Crosstalk	TV-R Crosstalk	RinS3	Allb/off except those specified on the left	****0001	Measure the maximum level of crosstalk in the same way using pin 39. (Data 1 D ₀₂ = 0 : mute off)
		RinE3	Allb/off except those specified on the left	****0101	
		RinE4	Allb/off except those specified on the left	****0100	
				DATA 2, 3	


				Allb/off except those specified on the left	

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)		MEASUREMENT METHOD
		SW MODE	DATA 2, 3	
23	L Switch Mute Attenuation	All-b/off except those specified on the left	*****	(1) V_2 1kHz, 1V _{p-p} input. (2) Mute on (data 1 D00 = 1) and while sequentially switching S ₁ , S ₃ , S ₄ , S ₆ , S ₈ , S ₁₀ , S ₁₄ , S ₁₆ , S ₂₀ , S ₂₂ , S ₄₉ , S ₅₁ , S _{52A} , and S _{54A} to 'a', measure the maximum level of crosstalk to pin 45 and find its ratio to selected output.
		All-b/off except those specified on the left	*****	Measure the maximum level of crosstalk in the same way using pin 35. (Data 1 D01 = 1 : mute on)
	R Switch Mute Attenuation	All-b/off except those specified on the left	*****	Measure the maximum level of crosstalk in the same way using pin 43. (Data 1 D00 = 1 : mute on)
		All-b/off except those specified on the left	*****	Measure the maximum level of crosstalk in the same way using pin 33. (Data 1 D01 = 1 : mute on)

NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C)		MEASUREMENT METHOD
		SW MODE	SW & VR MODE	
24	L _{in} E2	All-b / off	***0110	(1) No-signal input.
	L _{in} E1	All-b / off	***0111	(2) Measure voltage fluctuations to find the maximum value in all input modes of data 2 for pin 45, and in all input modes of data 3 for pin 35.
	L _{in} S1	All-b / off	***0011	
	L _{in} S2	All-b / off	***0010	
	L _{in} S3	All-b / off	***0001	
	L _{in} E3	All-b / off	***0101	
	L _{in} E4	All-b / off	***0100	
	R _{in} E2	All-b / off	***0110	
	R _{in} E1	All-b / off	***0111	
	R _{in} S1	All-b / off	***0011	Find the maximum value in the same way using pin 43 (data 2) and pin 33 (data 3).
Mode Switching Offset	R _{in} S2	All-b / off	***0010	
	R _{in} S3	All-b / off	***0001	
	R _{in} E3	All-b / off	***0101	
	R _{in} E4	All-b / off	***0100	
L _{in} E1		All-b / off	*****	Find the maximum value in the same way using pin 41.
	R _{in} E1	All-b / off	*****	Find the maximum value in the same way using pin 39.


NOTE	ITEM	MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, $V_{CC} = 9V$, $T_a = 25 \pm 3^\circ C$)			MEASUREMENT METHOD
		SW MODE	VR MODE	DATA 2, 3	
25 S Input Discriminating Voltage	$V_{in\ S1}$	S9-a, S7B-on, others-b/off	****0011	(1) V_1 1kHz, 1Vp-p input. (2) While gradually lowering the V_3 voltage, find the voltage where the output mode changes to the S mode (i.e., the voltage at which a waveform appears on pin 46). (Data 1 D00, D01, D02 = 0 : mute off)	
	$V_{in\ S2}$	S15-a, S13B-on, others-b/off	****0010		
	$V_{in\ S3}$	S21-a, S19B-on, others-b/off	****0001		
26 I Input Discriminating Voltage	I/O1	S28-a , others-b/off	*****	While gradually lowering the V_3 voltage, find the voltage at which the data of B34, B35, B36, and B37 changes from 0 to 1, respectively. (Data 1 D03, D04 = 1 : I MODE)	
	I/O2	S29-a , others-b/off	*****		
	RinE4	S52B-on , others-b/off	*****		
	LinE4	S54B-on , others-b/off	*****		
27 External Mute-ON Voltage	Mute	S4, S25-a, others-b/off	*****	While gradually raising the V_3 voltage, find the voltage at which mute is turned on.	
28 O Output Low Level Voltage	I/O1	All-b/off	*****	Find the voltage on pins 28, 29, and 31 when the data D03, D04, and D05 are 0, respectively.	
	I/O2	All-b/off	*****		
	O3	All-b/off	*****		

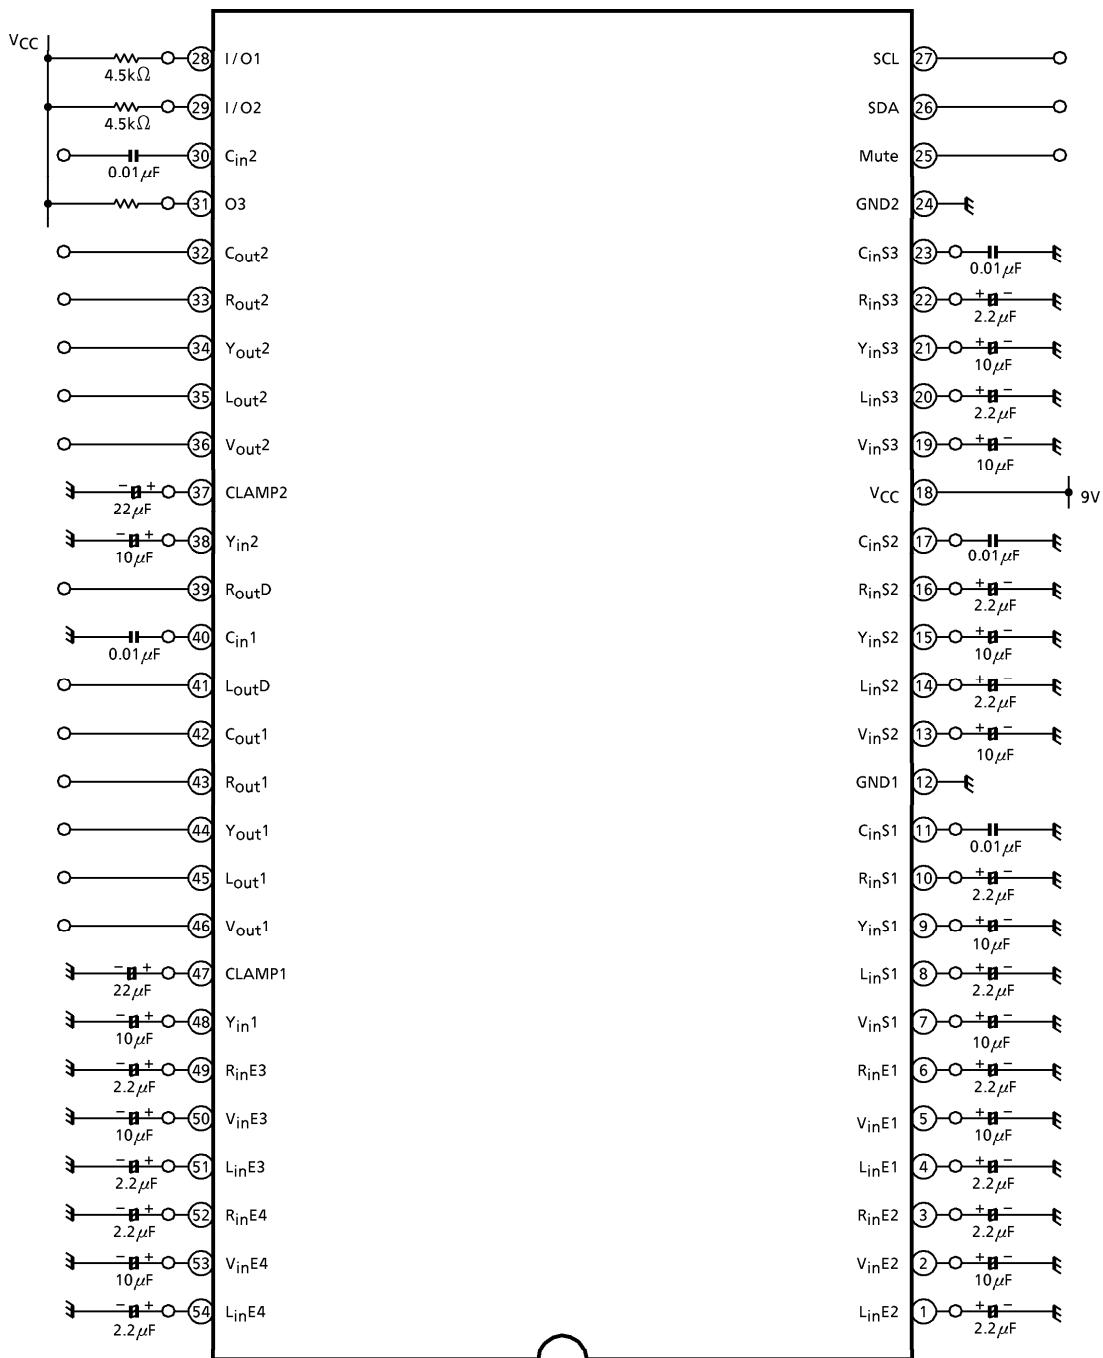TEST CIRCUIT 1
DC characteristics

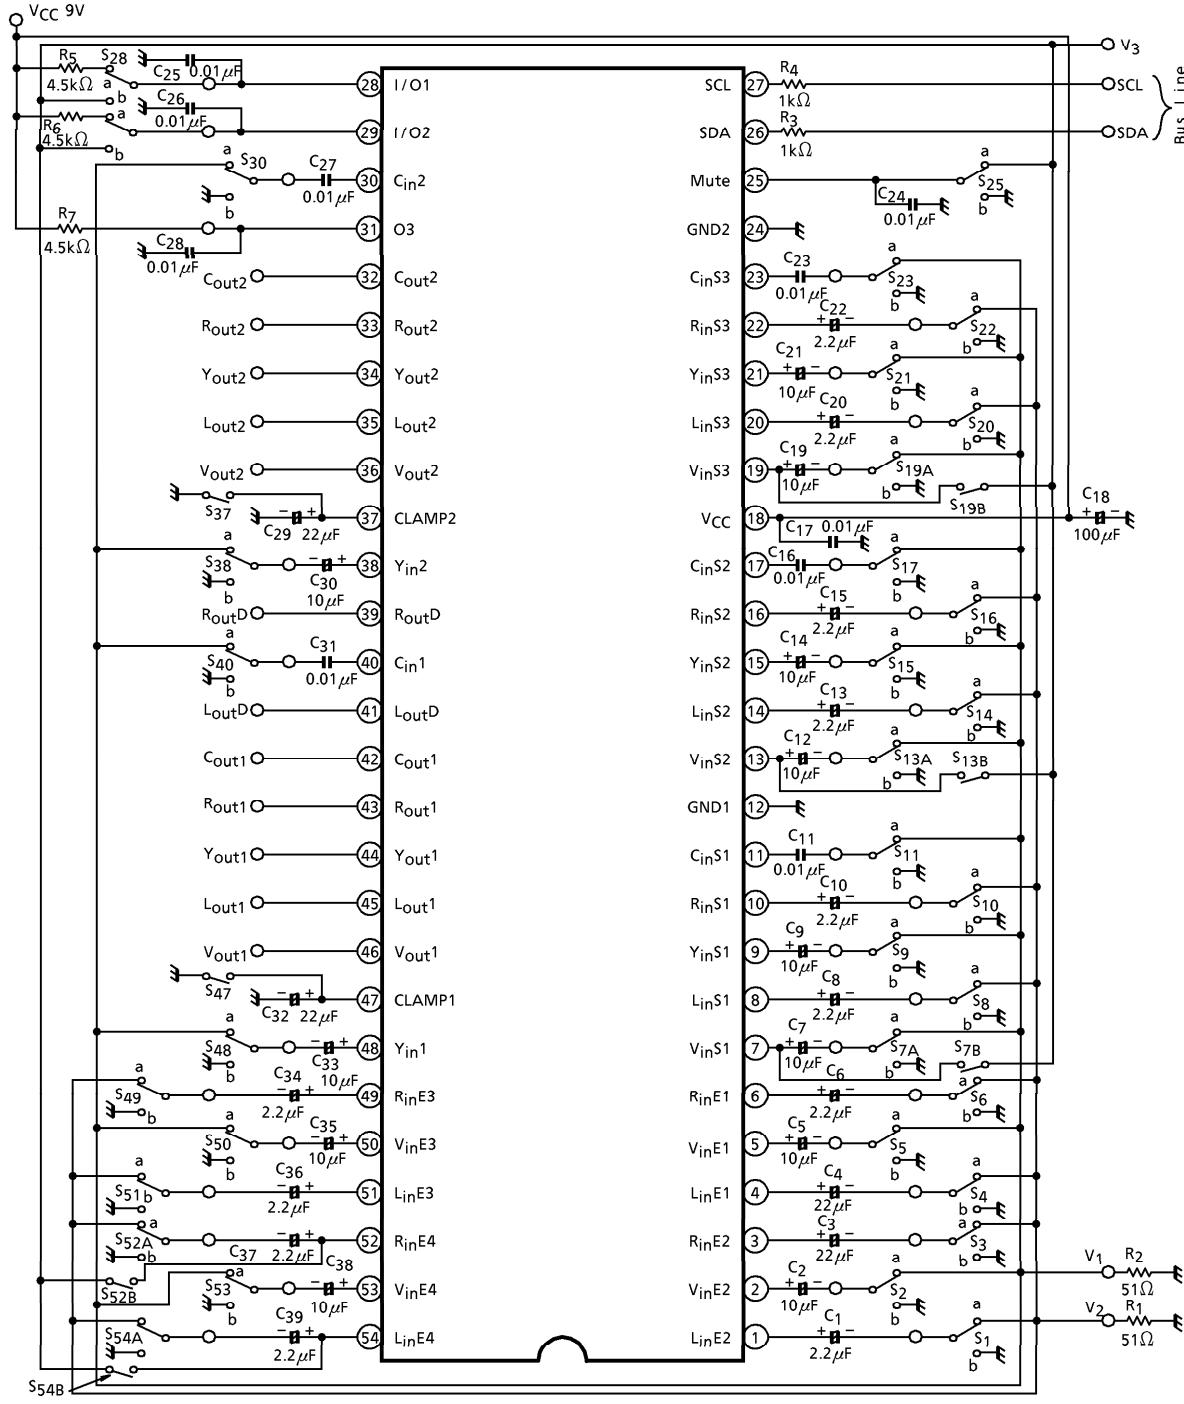
TEST CIRCUIT 2
AC characteristics


OUTLINE DRAWING
SDIP54-P-600-1.78

Unit : mm

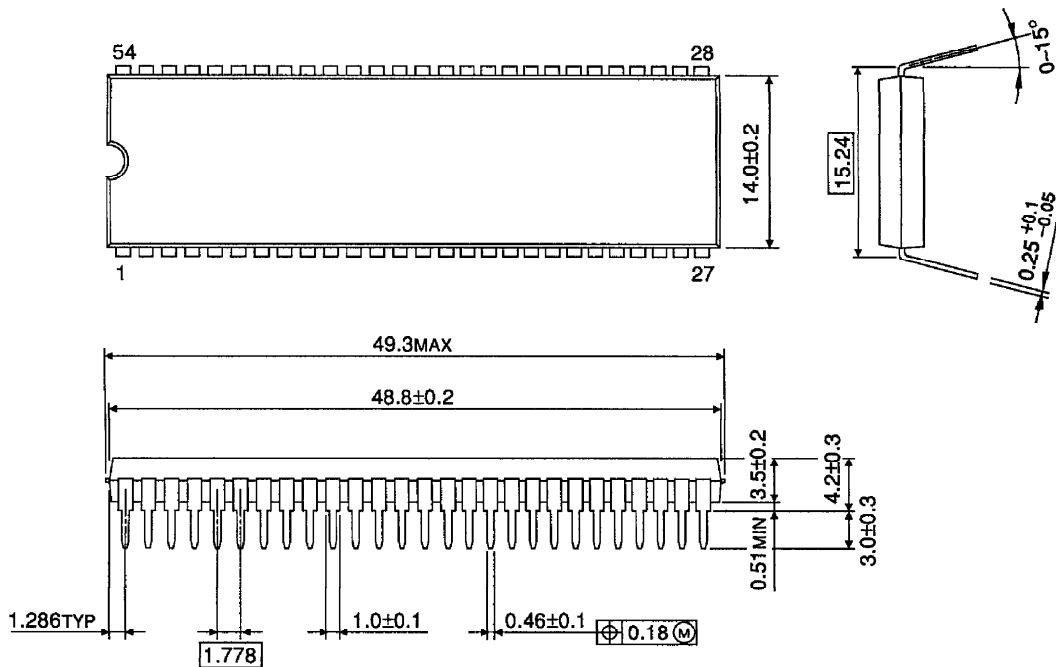

Weight : 1.0g (Typ.)