




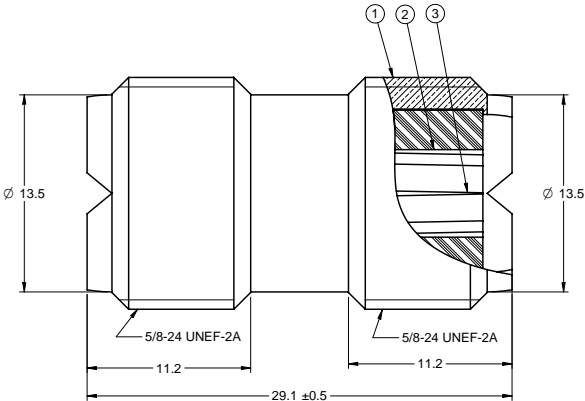

PART NUMBER	ITEM ① BODY	ITEM ② INSULATOR	ITEM ③ CONTACT
CP-AD204	BRASS NICKEL PLATED	DELRIN	BERLLIUM GOLD PLATED

DRAWING NO. CP-AD204									
REVISIONS									
RELEASE FOR QUTATION									
A	06-21-06	U	W	T					
ADD NOTES 4 & 5									
CHANGE TOL. ON OVERALL LENGTH									
B	12-26-06	Z	L	T					



- NOTES:
1. ELECTRICAL SPECIFICATIONS
UHF IMPEDANCE: NON-CONSTANT
WORKING VOLTAGE:500 VOLTS RMS AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE:1500 VOLTS RMS AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MIN
 2. ENVIRONMENTAL SPECIFICATIONS
TEMPERATURE RANGE: -55 °C TO +85 °C
 3. MECHANICAL CHARACTERISTICS:
DURABILITY: 500 CYCLES
 4. PRODUCT SHOULD BE RoHS COMPLIANCE.
 5. PACKAGING REQUIREMENT FOLLOWS ENGINEERING DOCUMENT P/N 836-40200001XX

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY GARY.ZHG	DATE 12-26-06	 Connectivity Solutions TITLE UHF ADAPTER, JACK TO JACK	
DECIMALS	mm	CHECKED BY LINDA.WU	DATE 12-26-06		
X	± 1.0	APPROVED BY	DATE		
X.X	± 0.5	THOMAS	12-26-06		
X.XX	± 0.2				
ANGLES	± 0.5°	U/M	mm		
THIS DRAWING WAS PRODUCED BY COMPUTER. DO NOT SCALE DRAWING OR UPDATE MANUALLY.					
SHEET		DRAWING NO.		SIZE	
1 OF 1		CP-AD204		C	

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL