

TOSHIBA BIPOLAR DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TD62591APG, TD62592APG, TD62593APG, TD62594APG
TD62595APG, TD62595AFG, TD62596APG, TD62596AFG
TD62597APG, TD62597AFG, TD62598APG, TD62598AFG

8CH SINGLE DRIVER

The TD62591APG Series are comprised of eight NPN Transistor Arrays.


Applications include relay, hammer, lamp and display (LED) drivers.

The suffix (G) appended to the part number represents a Lead (Pb)-Free product.

Features


- Output current (single output) 200 mA (Max)
- High sustaining voltage output 50V (Min)
- Low saturation voltage $V_{CE(sat)} = 0.8\text{ V}$
 @ $I_{out} = 150\text{ mA}$ inputs compatible with various type logic.
- Include Input Resistor
 TD62591A, TD62595APG/FG : external.
 general purpose
 TD62592A, TD62596APG/FG : 10.5 k Ω + 7V
 zener diode 14~25 V
 PMOS
 TD62593A, TD62597APG/FG : 2.7 k Ω
 TTL, 5 V CMOS
 TD62594A, TD62598APG/FG : 10.5 k Ω
 6~15 V PMOS, CMOS
- Include Clamp Diode
 TD62595APG, TD62595AFG, TD62596APG, TD62596AFG
 TD62597APG, TD62597AFG, TD62598APG, TD62598AFG
- Package type-APG : DIP-18pin
- Package type-AFG : SOP-18pin

TD62591APG, TD62592APG, TD62593APG
 TD62594APG, TD62595APG, TD62596APG
 TD62597APG, TD62598APG

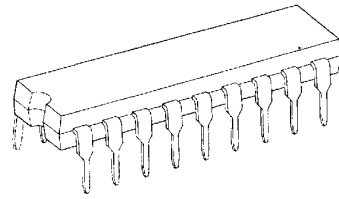

DIP18-P-300-2.54D

TD62595AFG, TD62596AFG
 TD62597AFG, TD62598AFG

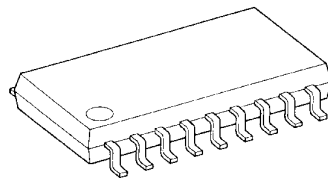


SOP18-P-375-1.27

Weight


DIP18-P-300-2.54D : 1.47 g (typ.)
 SOP18-P-375-1.27 : 0.41 g (typ.)

Pin Connection (top view)

TD62591APG, TD62592APG, TD62593APG
 TD62594APG

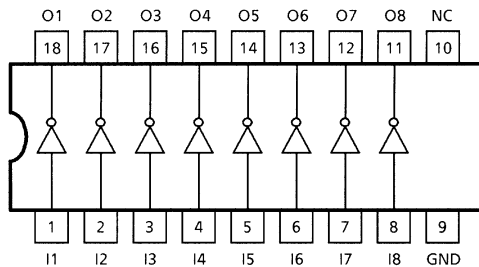


TD62595APG, TD62595AFG, TD62596APG, TD62596AFG
 TD62597APG, TD62597AFG, TD62598APG, TD62598AFG

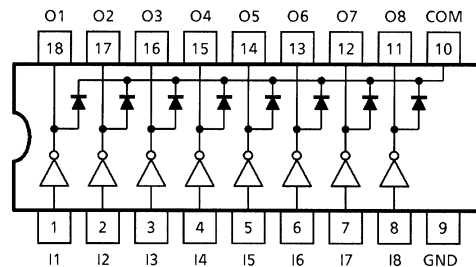


Schematics (each driver)

TD62591APG

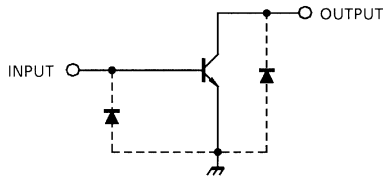


TD62592APG, TD62593APG, TD62594APG

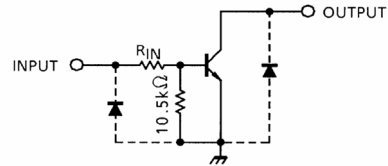


TD62592 $R_{IN} = 10.5k\Omega + V_z = 7V$
 TD62593 $R_{IN} = 2.7k\Omega$
 TD62594 $R_{IN} = 10.5k\Omega$

TD62595APG, TD62595AFG

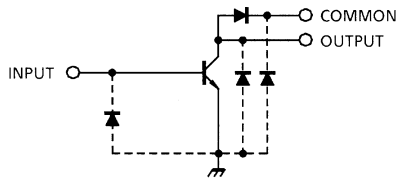

TD62596APG, TD62596AFG, TD62597APG, TD62597AFG, TD62598APG, TD62598AFG

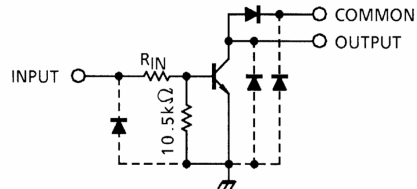

TD62596 $R_{IN} = 10.5k\Omega + V_z = 7V$
 TD62597 $R_{IN} = 2.7k\Omega$
 TD62598 $R_{IN} = 10.5k\Omega$

Note: The input and output parasitic diodes cannot be used as clamp diodes.

Absolute Maximum Ratings (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Emitter Voltage	V_{CEO}	50	V
Collector-Base Voltage	V_{CBO}	50	V
Clamp Diode Reverse Voltage	V_R (Note 1)	50	V
Collector Current	I_C	200	mA / ch
Input Voltage	V_{IN} (Note 2)	-0.5~30	V
Input Current	I_{IN} (Note 3)	25	mA
Power Dissipation	P_D (Note 4)	0.96 (Note 5) / 1.47	W
Operating Temperature	T_{opr}	-40~85	°C
Storage Temperature	T_{stg}	-55~150	°C

Note 1: Except TD62591~TD62594APG

Note 2: Except TD62591APG, TD62595APG, TD62595AFG

Note 3: Only TD62591APG, TD62595APG, TD62595AFG

Note 4: Delated above 25°C in the proportion of 11.7mW / °C (APG-Type), 7.7mW / °C (AFG-Type)

Note 5: SOP-18pin

Recommended Operating Conditions (Ta = -40~85°C)

CHARACTERISTIC		SYMBOL	CONDITION	MIN	TYP.	MAX	UNIT
Collector-Emitter Voltage		V_{CE0}	—	0	—	50	V
Collector-Base Voltage		V_{CBO}	—	0	—	50	V
Collector Current		I_C	—	0	—	150	mA / ch
Clamp Diode Reverse Voltage		V_R	(Note1)	7	—	50	V
Input Voltage		V_{IN}	(Note2)	0	—	25	V
Input Current		I_{IN}	(Note3)	0	—	10	mA
Input Voltage (Output On)	TD62592 TD62596	$V_{IN(ON)}$	—	14.0	—	25	V
	TD62593 TD62597			2.4	—	25	
	TD62594 TD62598			7.0	—	25	
Power Dissipation	APG	P_D	—	—	0.52	W	
	AFG		—	—	0.355		

Electrical Characteristics (Ta = 25°C unless otherwise noted)

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN	TYP.	MAX	UNIT	
Output Leakage Current		I_{CEX}	1	$V_{CE} = 50\text{ V}, V_{IN} = 0$	—	—	10	μA	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	2	$I_C = 10\text{ mA}, I_{IN} = 0.4\text{ mA}$	—	—	0.2	V	
				$I_C = 150\text{ mA}, I_{IN} = 3.0\text{ mA}$	—	—	0.8		
DC Current Transfer Ratio		h_{FE}	2	$V_{CE} = 10\text{ V}$ $I_C = 10\text{ mA}$	(Note 3)	70	—	—	—
					(Note 2)	50	—	—	
Input Current	TD62591 TD62595	$I_{IN(ON)}$	3	$I_C = 50\text{ mA}$	—	—	0.65	mA	
	TD62592 TD62596			$V_{IN} = 14\text{ V}, I_C = 50\text{ mA}$	—	—	0.9		
	TD62593 TD62597			$V_{IN} = 2.4\text{ V}, I_C = 50\text{ mA}$	—	—	0.9		
	TD62594 TD62598			$V_{IN} = 7.0\text{ V}, I_C = 50\text{ mA}$	—	—	0.9		
Turn-On Delay		t_{ON}	4	$V_{OUT} = 50\text{ V}, R_L = 330\ \Omega$	—	0.1	—	μs	
Turn-Off Delay		t_{OFF}			—	0.3	—	μs	


Note 1: Except TD62591~TD62594APG

Note 2: Except TD62591APG, TD62595APG, TD62595AFG


Note 3: Only TD62591APG, TD62595APG, TD62595AFG

Test Circuit


1. I_{CEX}





2. h_{FE} , $V_{CE(sat)}$



3. $V_{IN(ON)}$



4. t_{ON} , t_{OFF}

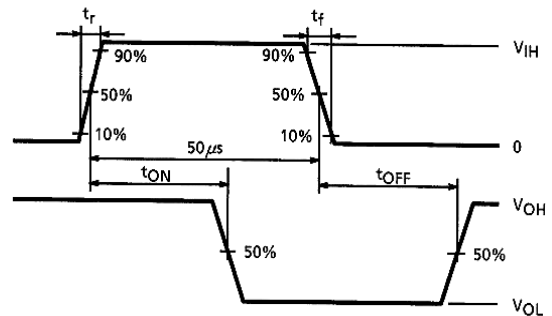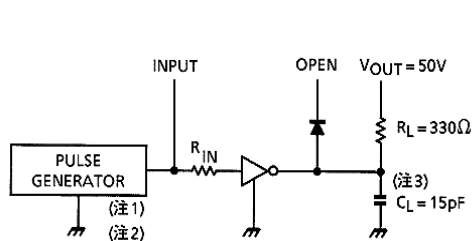

Note 1: Pulse width 50 μ s, duty cycle 10%
Output impedance 50 Ω , $t_r \leq 5$ ns, $t_f \leq 10$ ns

Note 2: See below

Input Condition

TYPE NUMBER	R_{IN}	V_{IH}
TD62591APG, TD62595APG, TD62595AFG	2.7 k Ω	3 V
TD62592APG, TD62596APG, TD62596AFG	0 Ω	15 V
TD62593APG, TD62597APG, TD62597AFG	0 Ω	3 V
TD62594APG, TD62598APG, TD62598AFG	0 Ω	10 V







Note 3: C_L includes probe and jig capacitance

Precautions for Using


This IC does not integrate protection circuits such as overcurrent and overvoltage protectors.

Thus, if excess current or voltage is applied to the IC, the IC may be damaged. Please design the IC so that excess current or voltage will not be applied to the IC.


Utmost care is necessary in the design of the output line, VCC and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

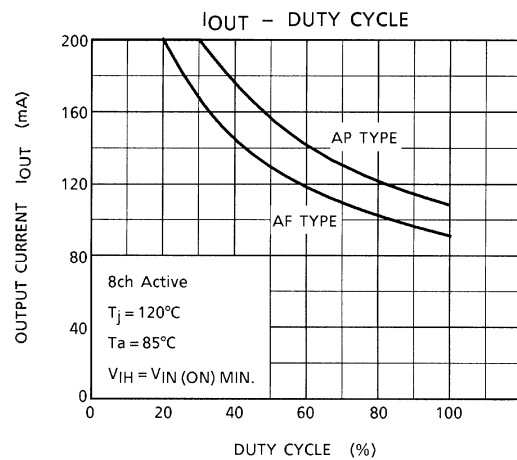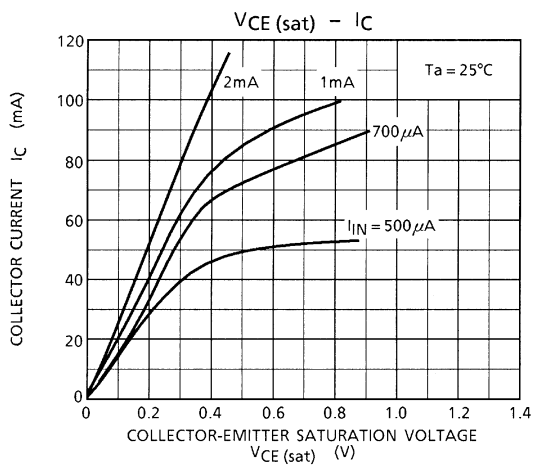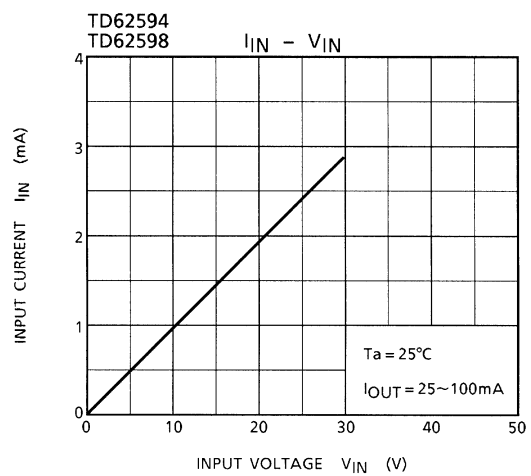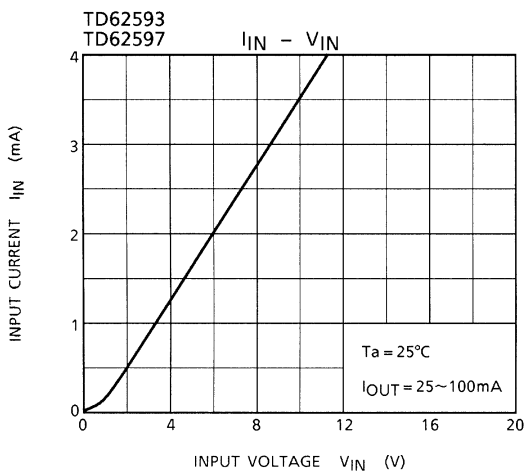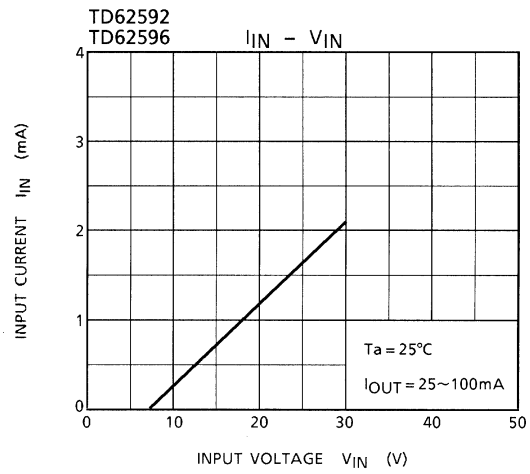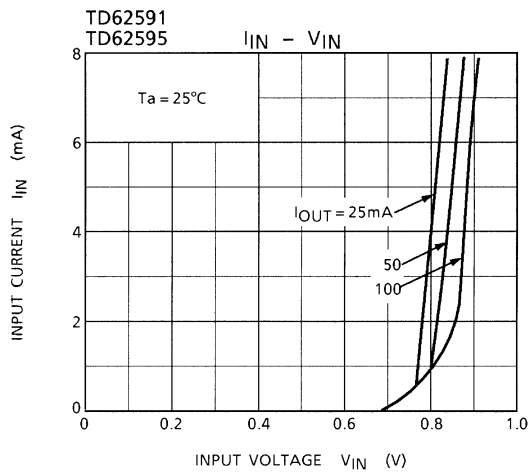


STATIC CHARACTERISTICS

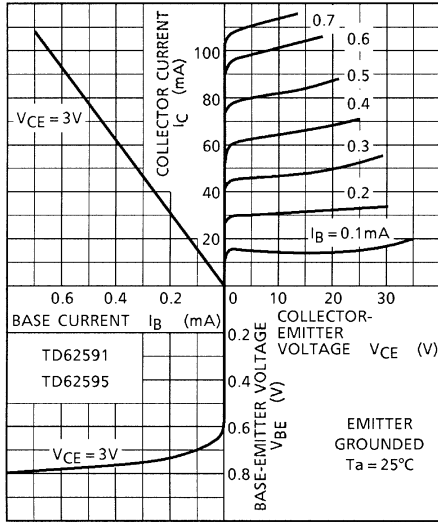

$P_D - T_a$

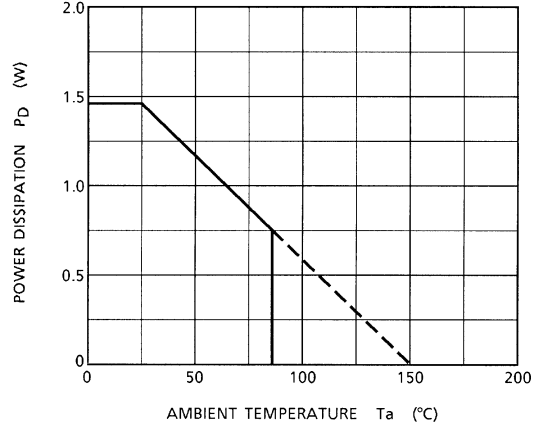


$h_{FE}, V_{CE}(\text{sat}) - I_C$

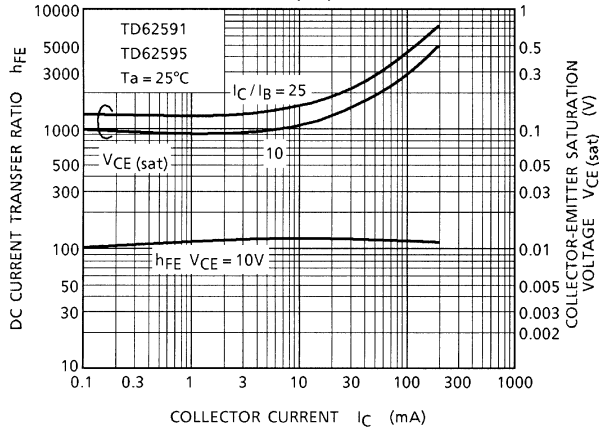

Package Dimensions

DIP18-P-300-2.54D

Unit: mm




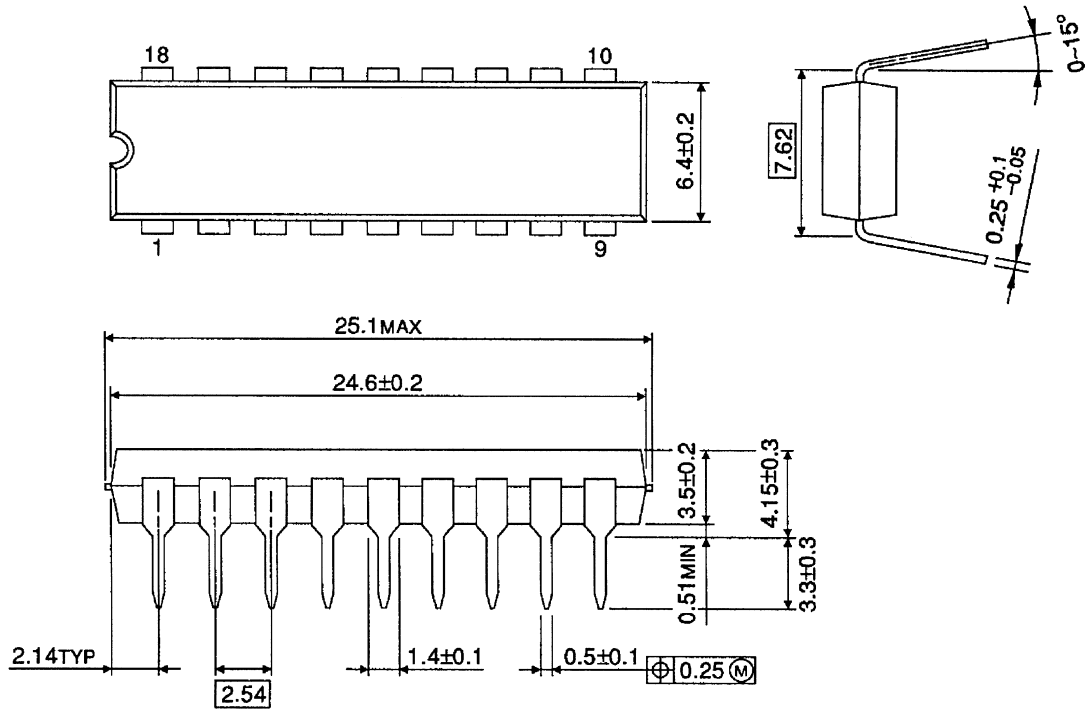


Weight: 1.47 g (Typ.)

Package Dimensions

SOP18-P-375-1.27

Unit: mm

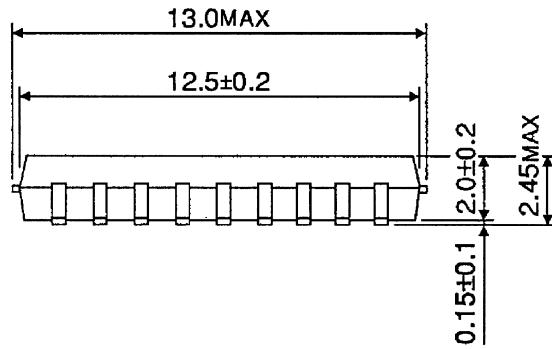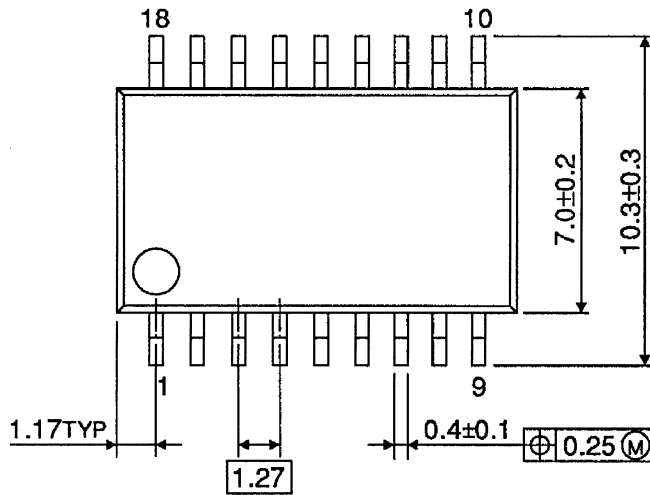

Weight: 0.50 g (Typ.)

Notes on Contents

1. Equivalent Circuits

The equivalent circuit diagrams may be simplified or some parts of them may be omitted for explanatory purposes.

2. Test Circuits

Components in the test circuits are used only to obtain and confirm the device characteristics. These components and circuits are not guaranteed to prevent malfunction or failure from occurring in the application equipment.

IC Usage Considerations

Notes on Handling of ICs

- (1) The absolute maximum ratings of a semiconductor device are a set of ratings that must not be exceeded, even for a moment. Do not exceed any of these ratings.
Exceeding the rating(s) may cause the device breakdown, damage or deterioration, and may result injury by explosion or combustion.
- (2) Use an appropriate power supply fuse to ensure that a large current does not continuously flow in case of over current and/or IC failure. The IC will fully break down when used under conditions that exceed its absolute maximum ratings, when the wiring is routed improperly or when an abnormal pulse noise occurs from the wiring or load, causing a large current to continuously flow and the breakdown can lead smoke or ignition. To minimize the effects of the flow of a large current in case of breakdown, appropriate settings, such as fuse capacity, fusing time and insertion circuit location, are required.
- (3) If your design includes an inductive load such as a motor coil, incorporate a protection circuit into the design to prevent device malfunction or breakdown caused by the current resulting from the inrush current at power ON or the negative current resulting from the back electromotive force at power OFF. IC breakdown may cause injury, smoke or ignition.
Use a stable power supply with ICs with built-in protection functions. If the power supply is unstable, the protection function may not operate, causing IC breakdown. IC breakdown may cause injury, smoke or ignition.
- (4) Do not insert devices in the wrong orientation or incorrectly.
Make sure that the positive and negative terminals of power supplies are connected properly. Otherwise, the current or power consumption may exceed the absolute maximum rating, and exceeding the rating(s) may cause the device breakdown, damage or deterioration, and may result injury by explosion or combustion.
In addition, do not use any device that is applied the current with inserting in the wrong orientation or incorrectly even just one time.
- (5) Carefully select external components (such as inputs and negative feedback capacitors) and load components (such as speakers), for example, power amp and regulator.
If there is a large amount of leakage current such as input or negative feedback condenser, the IC output DC voltage will increase. If this output voltage is connected to a speaker with low input withstand voltage, overcurrent or IC failure can cause smoke or ignition. (The over current can cause smoke or ignition from the IC itself.) In particular, please pay attention when using a Bridge Tied Load (BTL) connection type IC that inputs output DC voltage to a speaker directly.

Points to Remember on Handling of ICs

(1) Heat Radiation Design

In using an IC with large current flow such as power amp, regulator or driver, please design the device so that heat is appropriately radiated, not to exceed the specified junction temperature (T_j) at any time and condition. These ICs generate heat even during normal use. An inadequate IC heat radiation design can lead to decrease in IC life, deterioration of IC characteristics or IC breakdown. In addition, please design the device taking into consideration the effect of IC heat radiation with peripheral components.

(2) Back-EMF

When a motor rotates in the reverse direction, stops or slows down abruptly, a current flow back to the motor's power supply due to the effect of back-EMF. If the current sink capability of the power supply is small, the device's motor power supply and output pins might be exposed to conditions beyond absolute maximum ratings. To avoid this problem, take the effect of back-EMF into consideration in system design.

About solderability, following conditions were confirmed

- Solderability
 - (1) Use of Sn-37Pb solder Bath
 - solder bath temperature = 230°C
 - dipping time = 5 seconds
 - the number of times = once
 - use of R-type flux
 - (2) Use of Sn-3.0Ag-0.5Cu solder Bath
 - solder bath temperature = 245°C
 - dipping time = 5 seconds
 - the number of times = once
 - use of R-type flux

RESTRICTIONS ON PRODUCT USE

060116EBA

- The information contained herein is subject to change without notice. 021023_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023_A
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023_B
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106_Q
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. 021023_C
- The products described in this document are subject to the foreign exchange and foreign trade laws. 021023_E