

4



3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	L/R	DESCRIPTION	DATE	BY	APPD
		F		ECR-05-005975	30-JUN-04	BM	JB

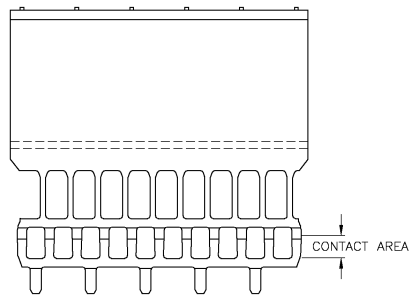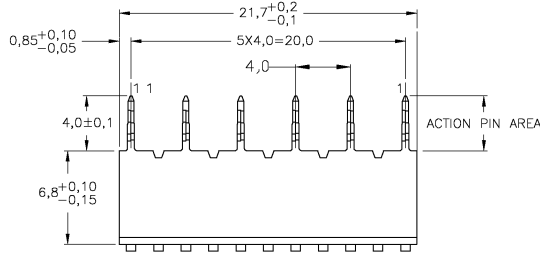

NOTES:

- ⚠ PLATING:  
CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.  
ACTION PIN : 0,5µm SnPb MIN.  
REMAINDER : Ni
- ⚠ MATERIAL: PHOSPHORBRONZE.
- ⚠ ROW "1" 6 PLATED THROUGH HOLES FOR UPERSHIELD
- ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C
- ⚠ 55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- ⚠ SHIELD LUBRICATED WITH BELLCORE APPROVED LUBRICANT.  
TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

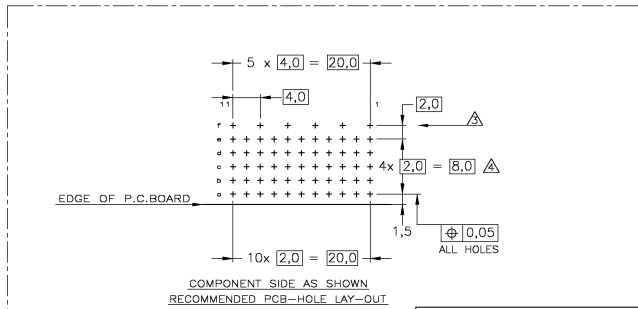

P.C.B. HOLE DIM. ACTION PIN  
 FOR DETAILS SEE  
 APPLICATION SPECIFICATION

FINISH	MATERIAL	PARTNUMBER
⚠	⚠	352111-9
⚠	⚠	352111-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN D. TRUIJEN 28-11-98	Tyco Electronics Corporation s-Hertogenbosch, 5222AR-32	
DIMENSIONS: mm		CHK W. v.d. HEIJDEN 28-11-98	NAME F. v. KONINGSBRUGGE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PROD SPEC 108-19082	Z-PACK 2mm HM GROUND RETURN UPPER SHIELD TYPE C/M	
0 P.L.C. ±		APPD 114-19029	SIZE A2	CAGE CODE (DRAWING NO) 00779
1 P.L.C. ±		RIGHT	C=352111	RESTRICTED TO
2 P.L.C. ±		MATERIAL	SCALE 5:1	SHEET 1 of 1
3 P.L.C. ±		FINISH	CUSTOMER DRAWING	REV F
4 P.L.C. ±				