

Upstream CATV Amplifiers

General Description

The MAX3514/MAX3516/MAX3517 programmable-gain amplifiers are designed for use in CATV upstream applications. The MAX3514/MAX3517 drive up to +61dBmV (QPSK) into a 75Ω load when driven with a +34dBmV nominal input signal. The MAX3516 drives up to +64dBmV (QPSK). Both input and output ports are differential, requiring that an external balun be used at the output port. The variable gain feature provides greater than 56dB of dynamic range, which is controlled by an SPI™ 3-wire interface. Gain control is available in 0.5dB steps. The devices operate over a frequency range of 5MHz to 65MHz.

The MAX3514 is a pin-for-pin compatible upgrade for the MAX3510. Like the MAX3510, the MAX3514 is internally matched for use with a 2:1 (voltage ratio) balun. The MAX3517 utilizes an external output resistor for greater load-matching flexibility, and offers the same performance as the MAX3514. The MAX3516 is a higher power version of the MAX3514 with 3dB more gain and output power capability, and is offered in a smaller thermally enhanced TSSOP-EP package.

These devices operate from a single +5VDC supply and draw 120mA during transmit (100% duty cycle, +61dBmV out). The MAX3516 can be operated at up to +9VDC supply for improved harmonic distortion performance. The bias current is automatically adjusted based on the output level to increase efficiency. Additionally, the devices are shut off between bursts to minimize noise and save power while still maintaining a match at the output port. Shutdown mode disables all circuitry and reduces current consumption to 10μA (typ).

The MAX3514/MAX3517 are available in a 20-pin QSOP package and the MAX3516 is available in a 20-pin TSSOP-EP package. All devices operate in the extended industrial temperature range (-40°C to +85°C).

Applications

DOCSIS™/EuroDOCSIS™ and DVB Cable Modems
OpenCable™ Set-Top Boxes
Telephony-Over-Cable
CATV Status Monitors

Typical Operating Circuit appears at end of data sheet.

SPI is a trademark of Motorola Corp.

DOCSIS/EuroDOCSIS/OpenCable are trademarks of CableLabs.

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Features

- ◆ Accurate Gain Control
- ◆ Gain Programmable in 0.5dB Steps
- ◆ 56dB of Gain Control Range
- ◆ -55dBc Harmonic Distortion at 65MHz Input
- ◆ Low Burst On/Off Transient
- ◆ High Efficiency:
35mA at +34dBmV Out
8mA Transmit Disable Mode


Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|-------------|----------------|--------------|
| MAX3514EEP | -40°C to +85°C | 20 QSOP |
| MAX3514EEP+ | -40°C to +85°C | 20 QSOP |
| MAX3516EUP | -40°C to +85°C | 20 TSSOP-EP* |
| MAX3516EUP+ | -40°C to +85°C | 20 TSSOP-EP* |
| MAX3517EEP | -40°C to +85°C | 20 QSOP |
| MAX3517EEP+ | -40°C to +85°C | 20 QSOP |

*EP = Exposed paddle.

+Denotes lead-free package.

Pin Configuration

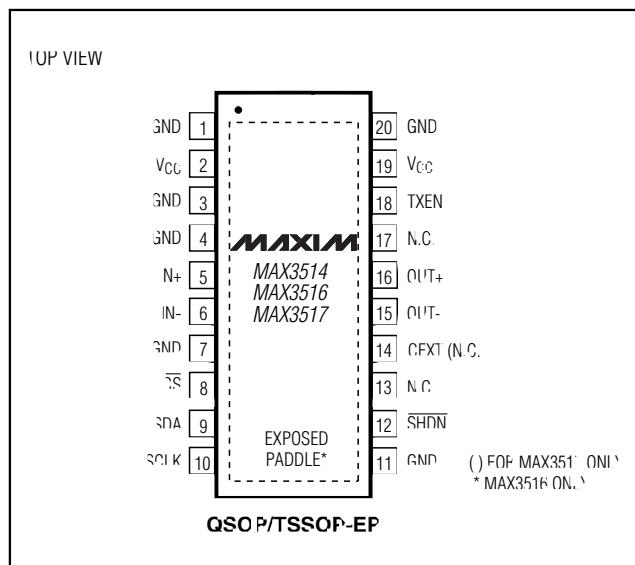

Upstream CATV Amplifiers

ABSOLUTE MAXIMUM RATINGS

V_{CC}, OUT+, OUT-.....-0.3V to +10.0V
 Input Voltage Levels (all inputs).....-0.3V to (V_{CC} + 0.3V)
 Continuous Input Voltage (IN+, IN-)2Vp-p
 Continuous Current (OUT+, OUT-)120mA
 Continuous Power Dissipation (T_A = +70°C)
 20-Pin QSOP (derate 12.3mW/°C above T_A = +70°C) .988mW
 20-Pin TSSOP-EP
 (derate 27mW/°C above T_A = +70°C)2200mW

Operating Temperature Range -40°C to +85°C
 Junction Temperature +150°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (soldering, 10s) +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS—MAX3514/MAX3516/MAX3517

(Typical operating circuit; V_{CC} = +4.75V to +5.25V, V_{GND} = 0, TXEN = $\overline{\text{SHDN}}$ = high, T_A = -40°C to +85°C. Typical parameters are at V_{CC} = +5V, T_A = +25°C, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|--------------------|---|------|-----|------|-------|
| Supply Voltage | V _{CC} | | 4.75 | | 5.25 | V |
| Supply Current Transmit Mode (MAX3514/MAX3517) | I _{CC} | D7 = 1, gain code = 125 (A _V = 27dB) | | 120 | 150 | mA |
| | | D7 = 0, gain code = 100 (A _V = 0dB) | | 35 | | |
| Supply Current Transmit Mode (MAX3516) | I _{CC} | D7 = 1, gain code = 125 (A _V = 31dB) | | 160 | 195 | mA |
| | | D7 = 0, gain code = 94 (A _V = 0.5dB) | | 30 | | |
| Supply Current Transmit Disable Mode | I _{CC} | TXEN = low | | 8 | 12 | mA |
| Supply Current Low-Power Standby | I _{CC} | $\overline{\text{SHDN}}$ = low | | 10 | | μA |
| LOGIC INPUTS | | | | | | |
| Input High Voltage | V _{INH} | | 2.0 | | | V |
| Input Low Voltage | V _{INL} | | | | 0.8 | V |
| Input High Current | I _{BIASH} | V _{INH} = +3.6V | | | 100 | μA |
| Input Low Current | I _{BIASL} | V _{INL} = 0 | -100 | | | μA |

Upstream CATV Amplifiers

MAX3514/MAX3516/MAX3517

AC ELECTRICAL CHARACTERISTICS—MAX3514

(MAX3514 EV kit; $V_{CC} = +4.75V$ to $+5.25V$, $V_{GND} = 0$, $P_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$. Typical parameters are at $V_{CC} = +5V$, $T_A = +25^{\circ}C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|----------|---|-------|-------|-------|-------------------|
| Voltage Gain, $f_{IN} = 5MHz$ (Note 2) | A_V | D7 = 1, gain code = 125, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 26.7 | 27.7 | 28.7 | dB |
| | | D7 = 1, gain code = 110, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 19.2 | 20.2 | 21.2 | |
| | | D7 = 1, gain code = 87, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 7.7 | 8.7 | 9.7 | |
| | | D7 = 0, gain code = 115, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 6.7 | 7.7 | 8.7 | |
| | | D7 = 0, gain code = 100, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -0.8 | 0.2 | 1.2 | |
| | | D7 = 0, gain code = 80, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -10.8 | -9.8 | -8.8 | |
| | | D7 = 0, gain code = 60, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -20.8 | -19.8 | -18.8 | |
| | | D7 = 0, gain code = 48, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -27.0 | -26.0 | -25.0 | |
| Voltage Gain, $f_{IN} = 65MHz$ | A_V | D7 = 1, gain code = 127, $T_A = -40^{\circ}C$ to $+85^{\circ}C$ (Notes 3, 4) | 26.3 | | | dB |
| Gain Rolloff (Notes 3, 4) | | $V_{OUT} = 61dBmV$, $f_{IN} = 5MHz$ to $42MHz$ | -0.3 | | -0.5 | dB |
| | | $V_{OUT} = 61dBmV$, $f_{IN} = 5MHz$ to $65MHz$ | -1.0 | | -1.5 | |
| Gain Step Size | | $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $+27dB$ | 0.5 | | | dB |
| | | $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $+27dB$, any 2-bit transition of D0, D1 | 0.7 | 1 | 1.3 | |
| | | $f_{IN} = 5MHz$ to $65MHz$, D7 = 0, gain code = 115; to D7 = 1, gain code = 87 | 0.7 | 1.0 | 1.3 | |
| Transmit-Disable Mode Noise | | $TXEN = \text{low}$, $BW = 160kHz$, $f_{IN} = 5MHz$ to $65MHz$ (Note 3) | | | -71 | dBmV |
| Isolation in Transmit-Disable Mode | | $TXEN = \text{low}$, $f_{IN} = 5MHz$ to $65MHz$ (Note 3) | 60 | | | dB |
| Transmit Mode Noise | | $BW = 160kHz$, $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $+27dB$ (Note 3) | | | -59 | dBc |
| Transmit Enable Transient Duration | | $TXEN$ input rise/fall time $< 0.1\mu s$, $T_A = +25^{\circ}C$ (Note 3) | | | 2 | μs |
| Transmit Disable Transient Duration | | $TXEN$ input rise/fall time $< 0.1\mu s$, $T_A = +25^{\circ}C$ (Note 3) | | | 2 | μs |
| Transmit Disable/Transmit Enable Transient Step Size | | D7 = 1, gain code = 125 ($A_V = 27dB$), $T_A = +25^{\circ}C$ | 30 | | 100 | mV _{P-P} |
| | | D7 = 0, gain code = 100 ($A_V = 0.2dB$), $T_A = +25^{\circ}C$ | 1 | | | |
| Input Impedance | Z_{IN} | $f_{IN} = 5MHz$ to $65MHz$, single-ended (Note 3) | 1 | 1.5 | | k Ω |
| Output Return Loss | | $f_{IN} = 5MHz$ to $42MHz$ in 75Ω system, D7 = 1 gain code = 125 ($A_V = 27dB$) (Note 4) | 10 | | | dB |

Upstream CATV Amplifiers

AC ELECTRICAL CHARACTERISTICS—MAX3514 (continued)

(MAX3514 EV kit; $V_{CC} = +4.75V$ to $+5.25V$, $V_{GND} = 0$, $P_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $T_A = -40^\circ C$ to $+85^\circ C$. Typical parameters are at $V_{CC} = +5V$, $T_A = +25^\circ C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------|--|-----|-----|-------|---------|
| Output Return Loss in Transmit-Disable Mode | | $f_{IN} = 5MHz$ to $42MHz$, in 75Ω system, $TXEN = \text{low}$ (Note 4) | | 10 | | dB |
| Two-Tone Third-Order Distortion | IM3 | Input tones at $42MHz$ and $42.2MHz$, both $+31dBmV$, $V_{OUT} = +58dBmV/\text{tone}$ (Note 3) | | -53 | -47 | dBc |
| | | Input tones at $65MHz$ and $65.2MHz$, both $+31dBmV$, $V_{OUT} = +58dBmV/\text{tone}$ | | -49 | | |
| 2nd-Harmonic Distortion (Note 3) | HD2 | $f_{IN} = 33MHz$, $V_{OUT} = +61dBmV$ | | -55 | -53 | dBc |
| | | $f_{IN} = 65MHz$, $V_{OUT} = +61dBmV$ | | -55 | -52 | |
| 3rd-Harmonic Distortion | HD3 | $f_{IN} = 22MHz$, $V_{OUT} = +61dBmV$ | | -55 | -50.5 | dBc |
| | | $f_{IN} = 65MHz$, $V_{OUT} = +61dBmV$ | | -55 | -50.5 | |
| AM to AM | AM/AM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 42MHz$ | | 0.1 | | dB |
| | | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 65MHz$ | | 0.1 | | |
| AM to PM | AM/PM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 42MHz$ | | 1 | | degrees |
| | | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 65MHz$ | | 1 | | |

Upstream CATV Amplifiers

MAX3514/MAX3516/MAX3517

AC ELECTRICAL CHARACTERISTICS—MAX3516

(MAX3516 EV kit; $V_{CC} = +4.75V$ to $+5.25V$, $V_{GND} = 0$, $P_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $T_A = -40^\circ C$ to $+85^\circ C$. Typical parameters are at $V_{CC} = +5V$, $T_A = +25^\circ C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------|---|-------|-------|-------|-------|
| Voltage Gain, $f_{IN} = 5MHz$ (Note 2) | A_V | D7 = 1, gain code = 125, $T_A = 0^\circ C$ to $+85^\circ C$ | 30 | 31 | 32 | dB |
| | | D7 = 1, gain code = 119, $T_A = 0^\circ C$ to $+85^\circ C$ | 27 | 28 | 29 | |
| | | D7 = 1, gain code = 104, $T_A = 0^\circ C$ to $+85^\circ C$ | 19.5 | 20.5 | 21.5 | |
| | | D7 = 1, gain code = 81, $T_A = 0^\circ C$ to $+85^\circ C$ | 8 | 9 | 10 | |
| | | D7 = 0, gain code = 109, $T_A = 0^\circ C$ to $+85^\circ C$ | 7 | 8 | 9 | |
| | | D7 = 0, gain code = 94, $T_A = 0^\circ C$ to $+85^\circ C$ | -0.5 | 0.5 | 1.5 | |
| | | D7 = 0, gain code = 74, $T_A = 0^\circ C$ to $+85^\circ C$ | -10.5 | -9.5 | -8.5 | |
| | | D7 = 0, gain code = 54, $T_A = 0^\circ C$ to $+85^\circ C$ | -20.5 | -19.5 | -18.5 | |
| | | D7 = 0, gain code = 42, $T_A = 0^\circ C$ to $+85^\circ C$ | -26.5 | -25.5 | -24.5 | |
| Voltage Gain, $f_{IN} = 65MHz$ | A_V | D7 = 1, gain code = 127, $T_A = -40^\circ C$ to $+85^\circ C$ (Notes 3, 4) | 28.1 | | | dB |
| Gain Roll-off (Notes 3, 4) | | $V_{OUT} = 64dBmV$, $f_{IN} = 5MHz$ to $42MHz$ | | -0.3 | -0.6 | dB |
| | | $V_{OUT} = 64dBmV$, $f_{IN} = 5MHz$ to $65MHz$ | | -1.1 | -1.7 | |
| Gain Step Size | | $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $+30dB$ | | 0.5 | | dB |
| | | $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $+30dB$, any 2-bit transition of D0, D1 | 0.6 | 1.0 | 1.4 | |
| | | $f_{IN} = 5MHz$ to $42MHz$, $A_V = -26dB$ to $+30dB$, D7 = 0, gain code = 109; to D7 = 1, gain code = 81 | 0.7 | 1.0 | 1.3 | |
| Transmit-Disable Mode Noise | | $TXEN = \text{low}$, $BW = 160kHz$, $f_{IN} = 5MHz$ to $65MHz$ | | | -71 | dBmV |
| Isolation in Transmit-Disable Mode | | $TXEN = \text{low}$, $f_{IN} = 5MHz$ to $65MHz$ (Note 3) | 60 | | | dB |
| Transmit Mode Noise | | $BW = 160kHz$, $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $27dB$ (Note 3) | | | -59 | dBc |

Upstream CATV Amplifiers

AC ELECTRICAL CHARACTERISTICS—MAX3516 (continued)

(MAX3516 EV kit; $V_{CC} = +4.75V$ to $+5.25V$, $V_{GND} = 0$, $P_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$. Typical parameters are at $V_{CC} = +5V$, $T_A = +25^{\circ}C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|----------|---|-----|-------|-------|-----------|
| Transmit Enable Transient Duration | | $TXEN$ input rise/fall time $< 0.1\mu s$, $T_A = +25^{\circ}C$ (Note 3) | | | 2 | μs |
| Transmit Disable Transient Duration | | $TXEN$ input rise/fall time $< 0.1\mu s$, $T_A = +25^{\circ}C$ (Note 3) | | | 2 | μs |
| Transmit Disable/Transmit Enable Transient Step Size | | $D7 = 1$, gain code = 119, ($A_V = 28dB$), $T_A = +25^{\circ}C$ | | 30 | 100 | mVp-p |
| | | $D7 = 0$, gain code = 94, ($A_V = 0.5 dB$), $T_A = +25^{\circ}C$ | | 1 | | |
| Input Impedance | Z_{IN} | $f_{IN} = 5MHz$ to $65MHz$, single-ended (Note 3) | 1 | 1.5 | | $k\Omega$ |
| Output Return Loss | | $f_{IN} = 5MHz$ to $65MHz$ in 75Ω system $D7 = 1$, gain code = 125, ($A_V = 31dB$) (Note 4) | | 10 | | dB |
| Output Return Loss in Transmit-Disable Mode | | $f_{IN} = 5MHz$ to $65MHz$ in 75Ω system, $TXEN = \text{low}$ (Note 4) | | 10 | | dB |
| Two-Tone Third-Order Distortion (Note 3) | IM3 | Input tones at $42MHz$ and $42.2MHz$, both $+31dBmV$, $V_{OUT} = +58dBmV/\text{tone}$ | | -53.5 | | dBc |
| | | Input tones at $65MHz$ and $65.2MHz$, both $+31dBmV$, $V_{OUT} = +58dBmV/\text{tone}$ | | -48.8 | | |
| 2nd-Harmonic Distortion (Note 3) | HD2 | $f_{IN} = 33MHz$, $V_{OUT} = +61dBmV$ | | -55 | -53 | dBc |
| | | $f_{IN} = 33MHz$, $V_{OUT} = +64dBmV$ | | -55 | | |
| | | $f_{IN} = 65MHz$, $V_{OUT} = +61dBmV$ | | -55 | -52 | |
| 3rd-Harmonic Distortion | HD3 | $f_{IN} = 22MHz$, $V_{OUT} = +61dBmV$ | | -55 | -50.5 | dBc |
| | | $f_{IN} = 22MHz$, $V_{OUT} = +64dBmV$ | | -50 | | |
| | | $f_{IN} = 65MHz$, $V_{OUT} = +61dBmV$ | | -55 | -50.5 | |
| AM to AM | AM/AM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 42MHz$ | | 0.1 | | dB |
| AM to AM | AM/AM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 65MHz$ | | 0.1 | | dB |
| AM to PM | AM/PM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 42MHz$ | | 1 | | degrees |
| AM to PM | AM/PM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 65MHz$ | | 1 | | degrees |

Upstream CATV Amplifiers

AC ELECTRICAL CHARACTERISTICS—MAX3517

(MAX3517 EV kit; $V_{CC} = +4.75V$ to $+5.25V$, $V_{GND} = 0$, $P_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$. Typical parameters are at $V_{CC} = +5V$, $T_A = +25^{\circ}C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------------|--------|---|-------|-------|-------|---------|
| Voltage Gain, $f_{IN} = 5MHz$ | A_V | D7 = 1, gain code = 125, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 26.7 | 27.7 | 28.7 | dB |
| | | D7 = 1, gain code = 110, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 19.2 | 20.2 | 21.2 | |
| | | D7 = 1, gain code = 90, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 9.2 | 10.2 | 11.2 | |
| | | D7 = 1, gain code = 70, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -0.8 | 0.2 | 1.2 | |
| | | D7 = 1, gain code = 115, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | 6.7 | 7.7 | 8.7 | |
| | | D7 = 1, gain code = 100, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -0.8 | 0.2 | 1.2 | |
| | | D7 = 1, gain code = 80, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -10.8 | -9.8 | -8.8 | |
| | | D7 = 0, gain code = 60, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -20.8 | -19.8 | -18.8 | |
| | | D7 = 0, gain code = 48, $T_A = 0^{\circ}C$ to $+85^{\circ}C$ | -27.0 | -26.0 | -25.0 | |
| Gain Step Size | | $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $+27dB$ | | 0.5 | | dB |
| Transmit-Disable Mode Noise | | $TXEN = \text{low}$, $BW = 160kHz$, $f_{IN} = 5MHz$ to $65MHz$ | | -71 | | dBmV |
| Isolation in Transmit-Disable Mode | | $TXEN = \text{low}$, $f_{IN} = 5MHz$ to $65MHz$ | 50 | 58 | | dB |
| Transmit Mode Noise | | $BW = 160kHz$, $f_{IN} = 5MHz$ to $65MHz$, $A_V = -26dB$ to $+27dB$ (Note 3) | | -60 | -59 | dBc |
| Transmit Enable Transient Duration | | $TXEN$ input rise/fall time $< 0.1\mu s$, $T_A = +25^{\circ}C$ (Note 3) | | | 2 | μs |

MAX3514/MAX3516/MAX3517

Upstream CATV Amplifiers

AC ELECTRICAL CHARACTERISTICS—MAX3517 (continued)

(MAX3517 EV kit; $V_{CC} = +4.75V$ to $+5.25V$, $V_{GND} = 0$, $P_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$. Typical parameters are at $V_{CC} = +5V$, $T_A = +25^{\circ}C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|----------|---|-----|-------|-----|-------------------|
| Transmit Disable Transient Duration | | $TXEN$ input rise/fall time $< 0.1\mu s$, $T_A = +25^{\circ}C$ | | | 2 | μs |
| Transmit Disable/Transmit Enable Transient Step Size | | $D7 = 1$, gain code = 125, ($A_V = 27dB$), $T_A = +25^{\circ}C$ | | 30 | 100 | mV _{P-P} |
| | | $D7 = 0$, gain code = 100, ($A_V = 0.2 dB$), $T_A = +25^{\circ}C$ | | 1 | | |
| Input Impedance | Z_{IN} | $f_{IN} = 5MHz$ to $65MHz$, single-ended (Note 3) | 1 | 1.5 | | $k\Omega$ |
| Output Return Loss | | $f_{IN} = 5MHz$ to $65MHz$ in 75Ω system $D7 = 1$, gain code = 125, ($A_V = 27dB$) (Note 4) | | 8.3 | | dB |
| Output Return Loss in Transmit-Disable Mode | | $f_{IN} = 42MHz$, in 75Ω system $TXEN = \text{low}$ (Note 4) | | 10.5 | | dB |
| Two-Tone Third-Order Distortion (Note 2) | IM3 | Input tones at $42MHz$ and $42.2MHz$, both $+31dBmV$, $V_{OUT} = +58dBmV/\text{tone}$ | | -49.5 | | dBc |
| | | Input tones at $65MHz$ and $65.2MHz$, both $+31dBmV$, $V_{OUT} = +58dBmV/\text{tone}$ | | -46.3 | | |
| 2nd-Harmonic Distortion | HD2 | $f_{IN} = 33MHz$, $V_{OUT} = +61dBmV$ | | -55 | | dBc |
| | | $f_{IN} = 65MHz$, $V_{OUT} = +61dBmV$ | | -55 | | |
| 3rd-Harmonic Distortion | HD3 | $f_{IN} = 22MHz$, $V_{OUT} = +61dBmV$ | | -55 | | dBc |
| | | $f_{IN} = 65MHz$, $V_{OUT} = +61dBmV$ | | -55 | | |
| AM to AM | AM/AM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 42MHz$ | | 0.1 | | dB |
| AM to AM | AM/AM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 65MHz$ | | 0.1 | | dB |
| AM to PM | AM/PM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 42MHz$ | | 1 | | degrees |
| AM to PM | AM/PM | $A_V = 27dB$, $V_{IN} = +34dBmV$ to $+38dBmV$, $f_{IN} = 65MHz$ | | 1 | | degrees |

Upstream CATV Amplifiers

MAX3514/MAX3516/MAX3517

TIMING CHARACTERISTICS

($V_{CC} = 4.75V$ to $5.25V$, $V_{GND} = 0$, $TXEN = \overline{SHDN} = \text{high}$, $D7 = X$, $T_A = +25^\circ C$, unless otherwise specified.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------|--------------|------------|-----|-----|-----|-------|
| SEN to SCLK Setup Time | t_{SENS} | | 20 | | | ns |
| SEN to SCLK Hold Time | t_{SENH} | | 10 | | | ns |
| SDA to SCLK Setup Time | t_{SDAS} | | 10 | | | ns |
| SDA to SCLK Hold Time | t_{SDAH} | | 20 | | | ns |
| SDA Pulse Width High | T_{DATAH} | | 50 | | | ns |
| SDA Pulse Width Low | $T_{DATA L}$ | | 50 | | | ns |
| SCLK Pulse Width High | t_{SCLKH} | | 50 | | | ns |
| SCLK Pulse Width Low | t_{SCLKL} | | 50 | | | ns |

Note 1: Guaranteed by design and characterization to ± 3 sigma for $T_A < +25^\circ C$, unless otherwise specified.

Note 2: AC Gain correlated to DC Gain measurements to ± 3 sigma.




Note 3: Guaranteed by design and characterization to ± 6 sigma.

Note 4: Does not include output matching; see Output Match in the *Applications* section.

Typical Operating Characteristics

(Typical operating circuit; $V_{CC} = +5V$, $V_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $f_{IN} = 20MHz$, $Z_{LOAD} = 75\Omega$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX3514/MAX3517

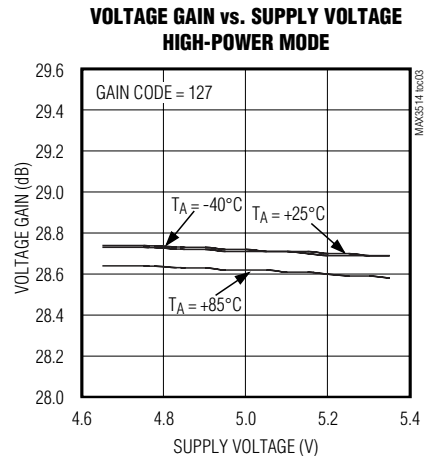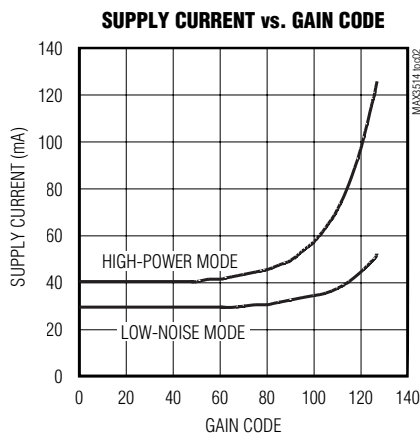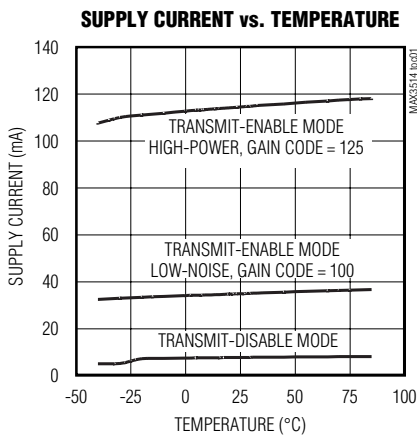


Upstream CATV Amplifiers

Typical Operating Characteristics (continued)


(Typical operating circuit; $V_{CC} = +5V$, $V_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $f_{IN} = 20MHz$, $Z_{LOAD} = 75\Omega$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX3514/MAX3517 (continued)


**VOLTAGE GAIN vs. SUPPLY VOLTAGE
LOW-NOISE MODE**

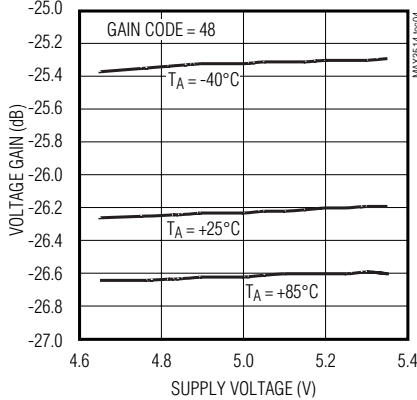


**VOLTAGE GAIN vs. TEMPERATURE
HIGH-POWER MODE**

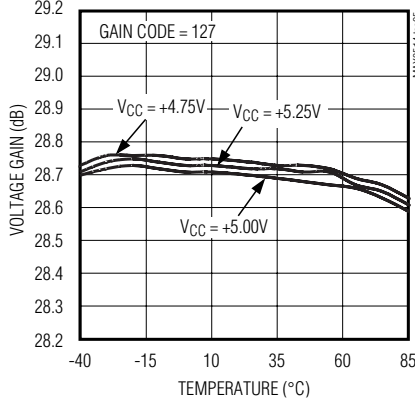


**VOLTAGE GAIN vs. TEMPERATURE
LOW-NOISE MODE**

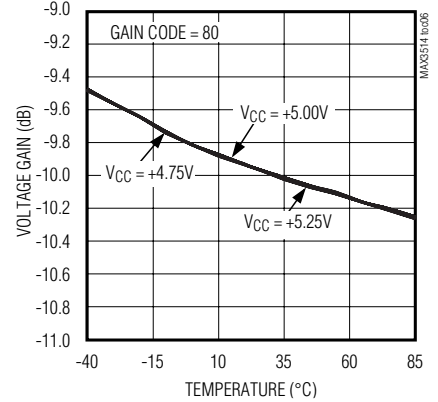


**VOLTAGE GAIN vs. FREQUENCY
HIGH-POWER MODE**

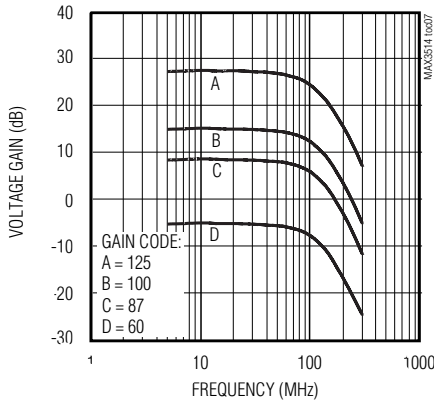


**VOLTAGE GAIN vs. FREQUENCY
LOW-NOISE MODE**

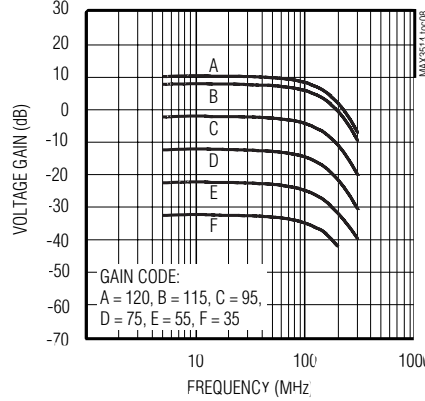


VOLTAGE GAIN vs. GAIN CODE

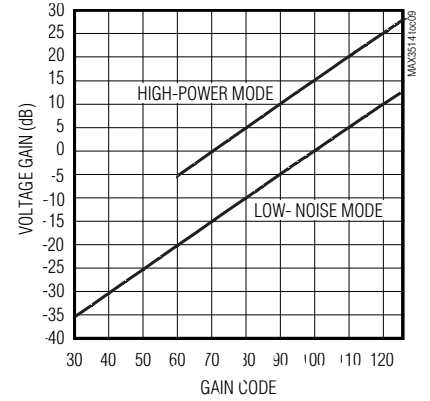


**GAIN STEP vs. GAIN CODE
HIGH-POWER MODE**

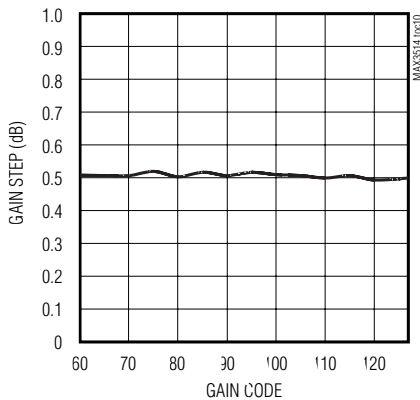

**GAIN STEP vs. GAIN CODE
LOW-NOISE MODE**

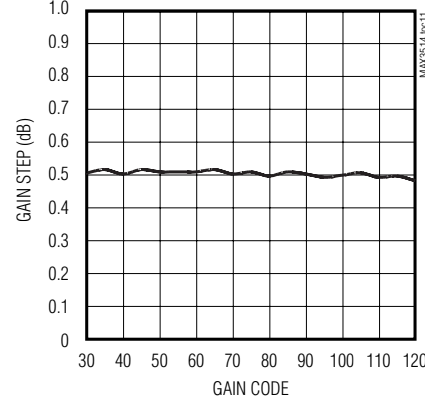

TRANSMIT NOISE vs. GAIN CODE








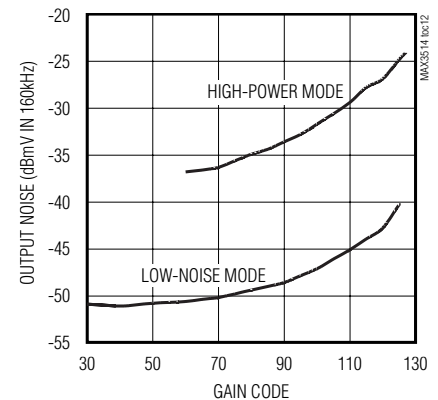


Upstream CATV Amplifiers

Typical Operating Characteristics (continued)

(Typical operating circuit; $V_{CC} = +5V$, $V_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $f_{IN} = 20MHz$, $Z_{LOAD} = 75\Omega$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX3514/MAX3517 (continued)

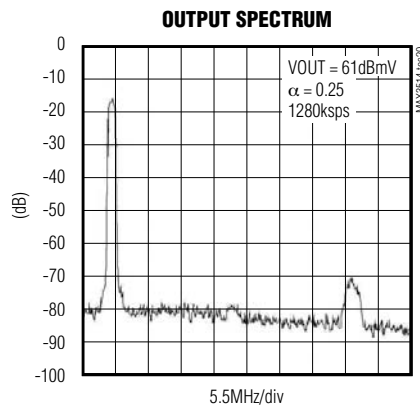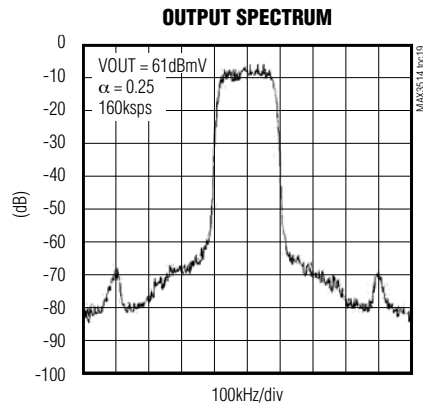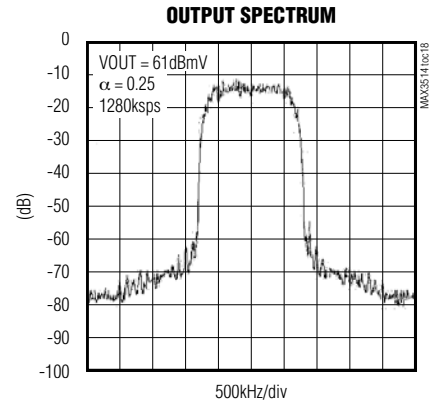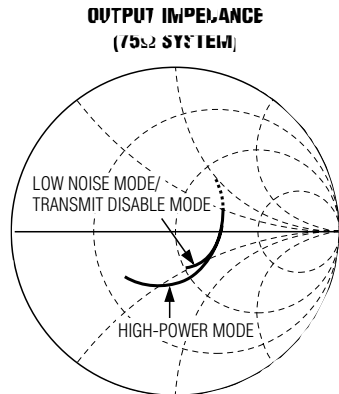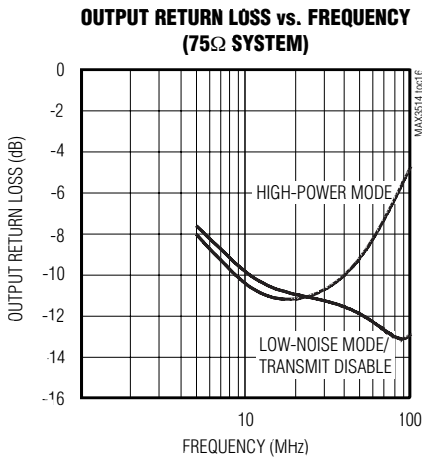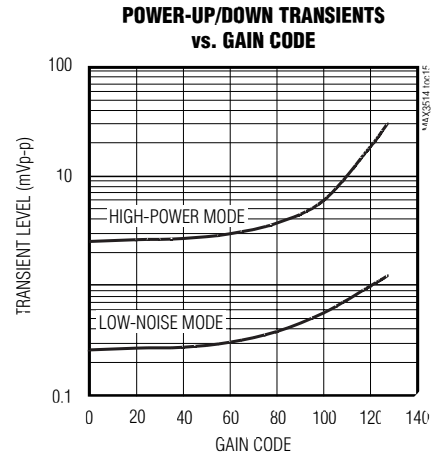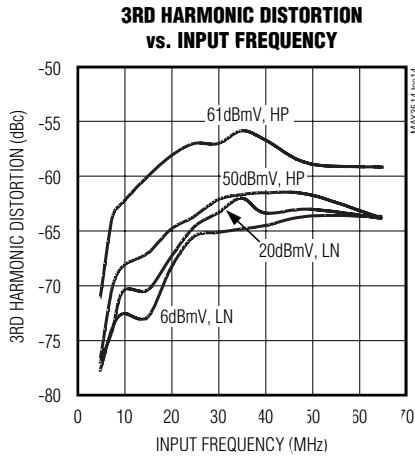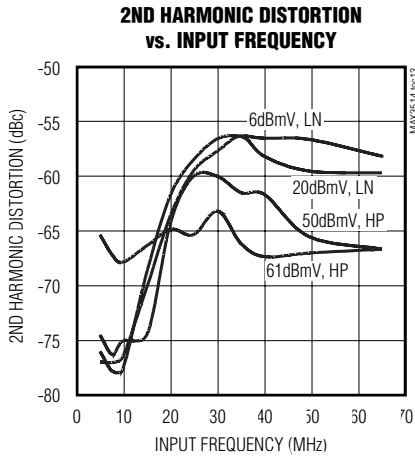










MAX3514/MAX3516/MAX3517

Upstream CATV Amplifiers

Typical Operating Characteristics (continued)

(Typical operating circuit; $V_{CC} = +5V$, $V_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $f_{IN} = 20MHz$, $Z_{LOAD} = 75\Omega$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX3516

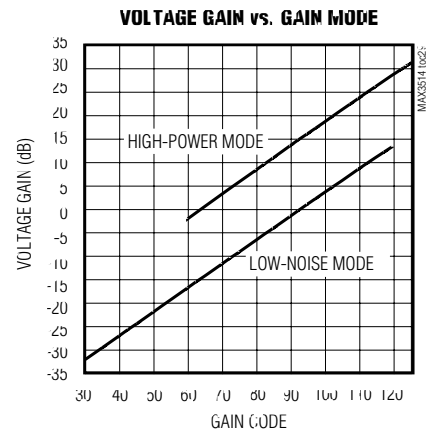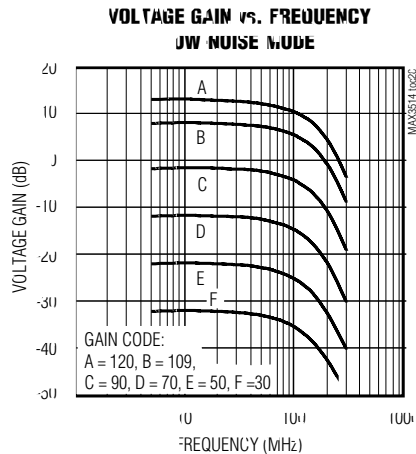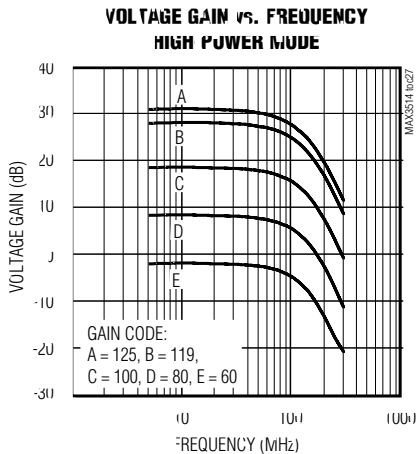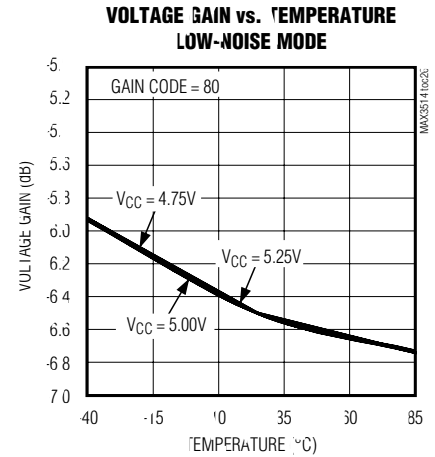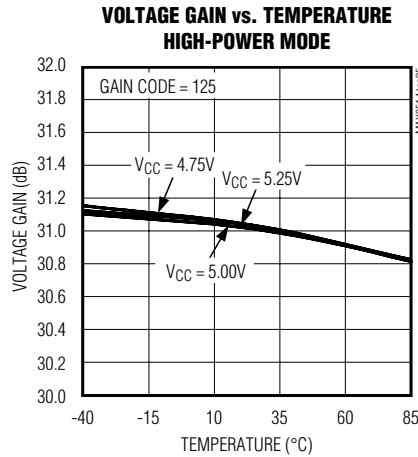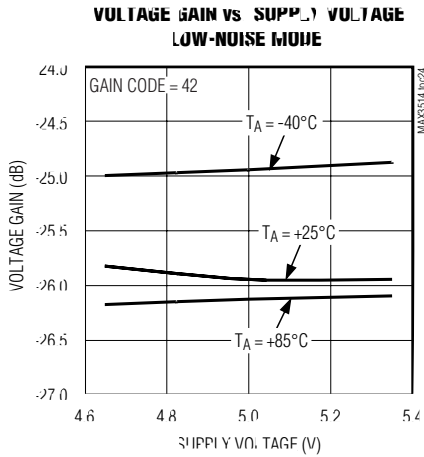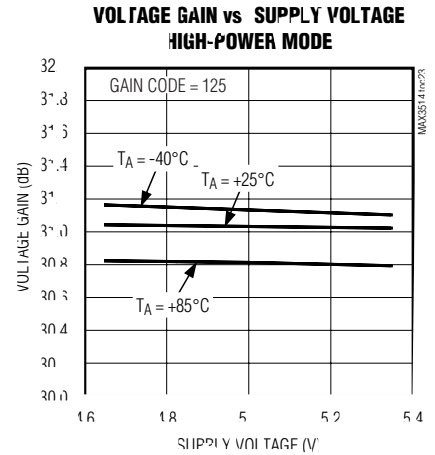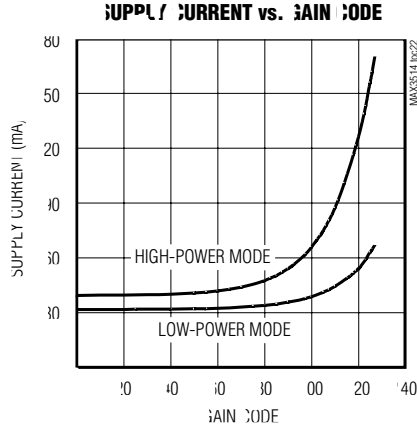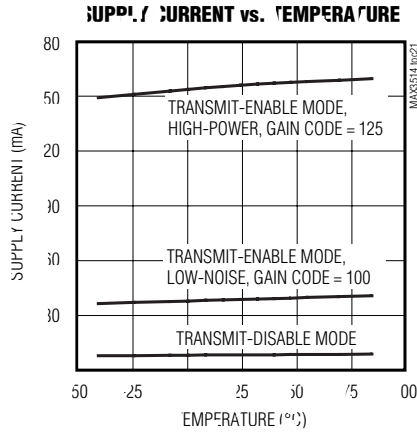

Upstream CATV Amplifiers


MAX3514/MAX3516/MAX3517

Typical Operating Characteristics (continued)


(Typical operating circuit; $V_{CC} = +5V$, $V_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $f_{IN} = 20MHz$, $Z_{LOAD} = 75\Omega$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX3516 (continued)


GAIN STEP vs. GAIN CODE
HIGH-POWER MODE

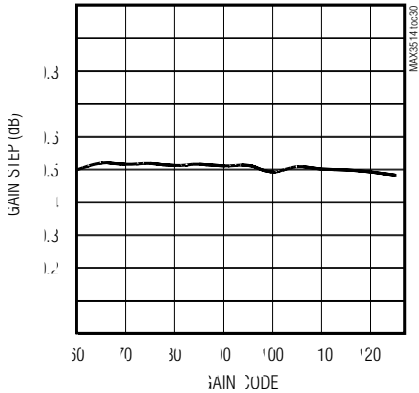


GAIN STEP vs. GAIN CODE
LOW-NOISE MODE

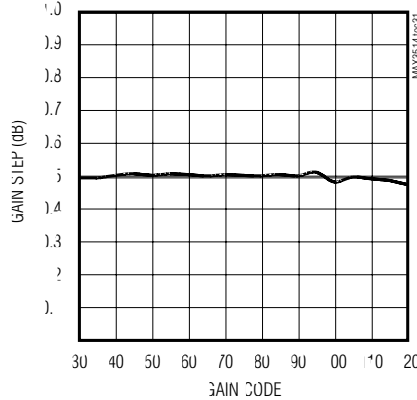


TRANSMIT NOISE vs. GAIN CODE

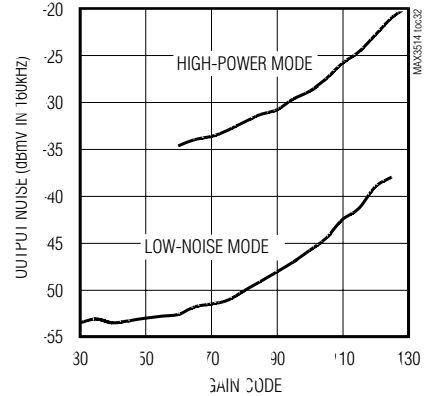


2ND HARMONIC DISTORTION
vs. INPUT FREQUENCY, $V_{CC} = 5.0V$

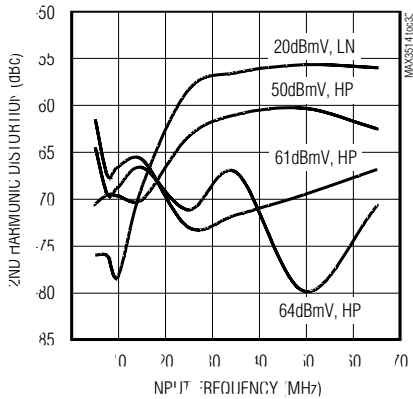


3RD HARMONIC DISTORTION
vs. INPUT FREQUENCY, $V_{CC} = 5.0V$

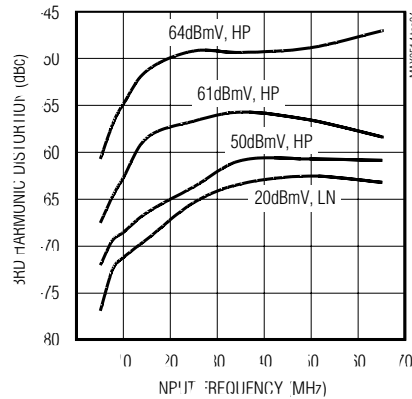


2ND HARMONIC DISTORTION
vs. INPUT FREQUENCY, $V_{CC} = 7.0V$

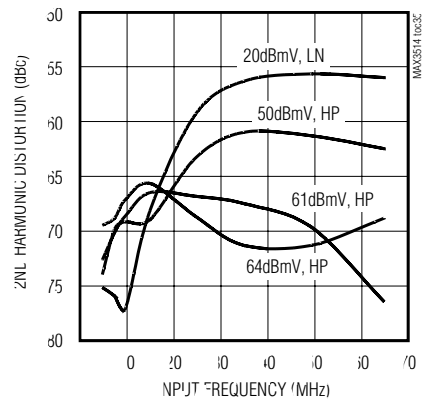


3RD HARMONIC DISTORTION
vs. INPUT FREQUENCY, $V_{CC} = 7.0V$

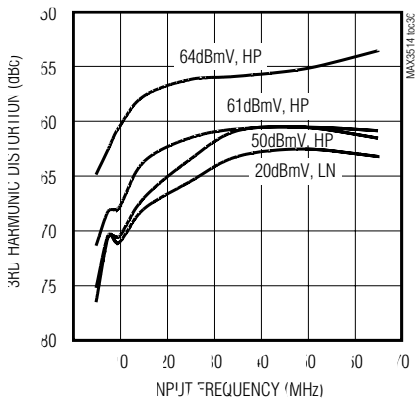

POWER-UP/DOWN TRANSIENTS
vs. GAIN CODE

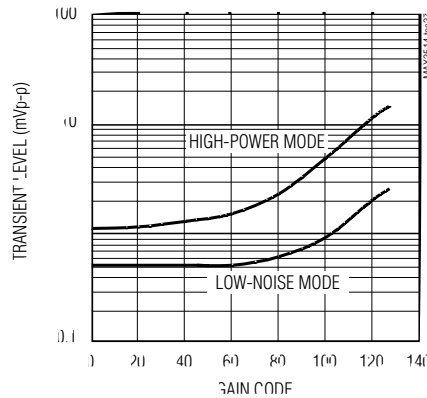

OUTPUT RETURN LOSS vs. FREQUENCY
(75Ω SYSTEM)

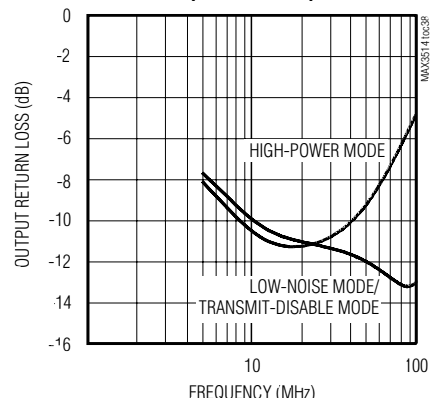


Upstream CATV Amplifiers

Typical Operating Characteristics (continued)


(Typical operating circuit; $V_{CC} = +5V$, $V_{IN} = +34dBmV$, $TXEN = \overline{SHDN} = \text{high}$, $f_{IN} = 20MHz$, $Z_{LOAD} = 75\Omega$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX3516 (continued)


OUTPUT IMPEDANCE: 5MHz-65MHz
(75Ω SYSTEM)

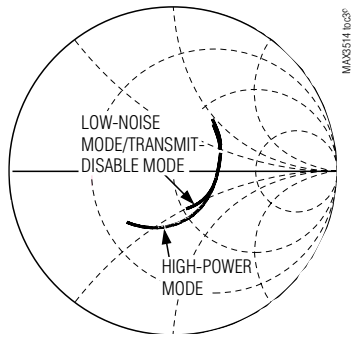


OUTPUT SPECTRUM

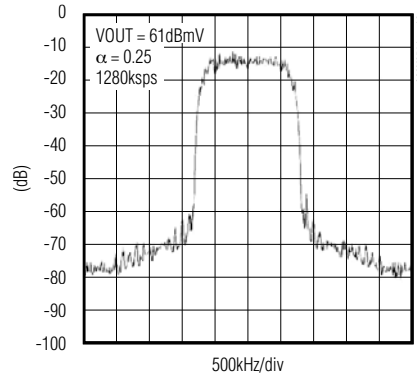

OUTPUT SPECTRUM

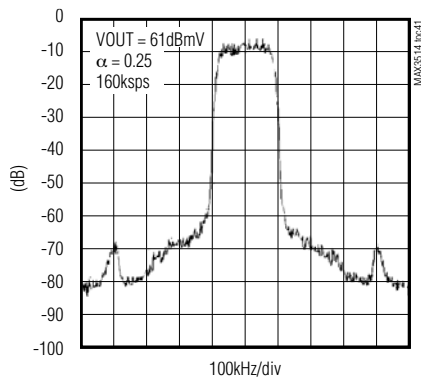

OUTPUT SPECTRUM

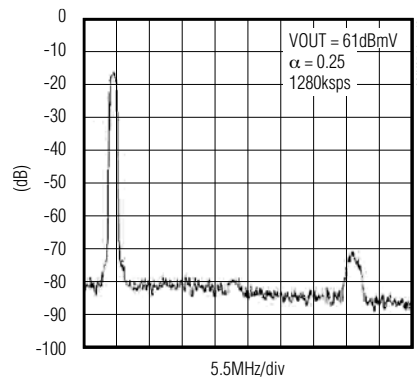

Upstream CATV Amplifiers


Pin Description

| PIN | NAME | FUNCTION |
|----------------|--------------------------|---|
| 1, 3, 7, 11 | GND | Ground |
| 2 | V _{CC} | Programmable-Gain Amplifier (PGA) +5V Supply. Bypass to pin 4 with a decoupling capacitor as close to the part as possible. |
| 4 | GND | PGA RF Ground. As with all ground connections, maintain the shortest possible (low-inductance) length to the ground plane. |
| 5 | IN+ | Positive PGA Input. Along with IN-, this port forms a high-impedance differential input to the PGA. Driving this port differentially increases the rejection of second-order distortion at low output levels. |
| 6 | IN- | Negative PGA Input. When not used, this port must be AC-coupled to ground. See IN+. |
| 8 | $\overline{\text{CS}}$ | Serial-Interface Enable. TTL-compatible input. See the <i>Serial Interface</i> section. |
| 9 | SDA | Serial-Interface Data. TTL-compatible input. See the <i>Serial Interface</i> section. |
| 10 | SCLK | Serial-Interface Clock. TTL-compatible input. See the <i>Serial Interface</i> section. |
| 12 | $\overline{\text{SHDN}}$ | Shutdown. When $\overline{\text{SHDN}}$ is set low, all functions (including the serial interface) are disabled. |
| 13, 17 | N.C. | No Connection |
| 14 | CEXT | RF Output Bypass. Bypass to ground with a 0.1 μ F capacitor. (N.C. for MAX3517.) |
| 15 | OUT- | Negative Output. Along with OUT+, this port forms a 300 Ω impedance output. This port is matched to a 75 Ω load using a 2:1 (voltage ratio) transformer. |
| 16 | OUT+ | Positive Output. See OUT-. |
| 18 | TXEN | Transmit Enable. Drive TXEN high to place the device in transmit-enable mode. |
| 19 | V _{CC} | Output Amplifier Bias, +5V Supply. Bypass to pin 20 with a decoupling capacitor as close to the part as possible. |
| 20 | GND | Output Amplifier Bias Ground. As with all ground connections, maintain the shortest possible (low-inductance) length to the ground plane. |
| Exposed Paddle | GND | Ground (MAX3516 only) |

MAX3514/MAX3516/MAX3517

Upstream CATV Amplifiers

Functional Diagram

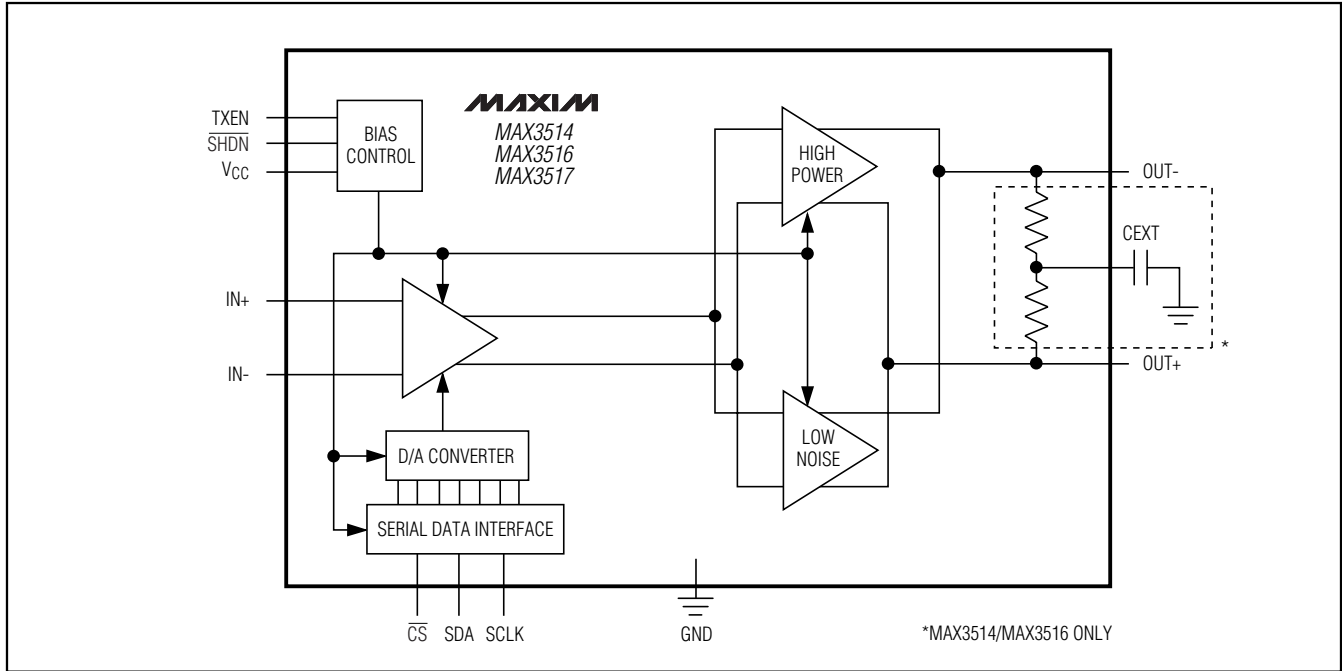

Detailed Description

Programmable-Gain Amplifier

The PGA consists of the variable-gain amplifier (VGA) and the digital-to-analog converter (DAC), which provide better than 56dB of output level control in 0.5dB steps. The PGA is implemented as a programmable Gilbert-cell attenuator. The gain of the PGA is determined by a 7-bit word (D6–D0) programmed through the serial data interface (Tables 1 and 2).

Specified performance is achieved when the input is driven differentially. The device may be driven single ended. To drive the device in this manner, one of the input pins must be capacitively coupled to ground. Use a capacitor value large enough to allow for a low-impedance path to ground at the lowest frequency of operation. For operation down to 5MHz, a 0.001µF capacitor is suggested.

Output Amplifiers

The output amplifiers are Class A differential amplifiers capable of driving +61dBmV (QPSK, MAX3514) differentially. This architecture provides superior even-order distortion performance but requires that a transformer be used to convert to a single-ended output. In transmit-disable mode, the output amplifiers are powered

down. A resistor is across the output so that the output impedance remains matched when the amplifier is in transmit-disable mode. Disabling the output devices also results in low output noise.

MAX3514/MAX3516

To match the output impedance to a 75Ω load, the transformer must have a turns ratio (voltage ratio) of 2:1 (4:1 impedance ratio). The differential amplifier is biased directly from the +5V supply using the center tap of the output transformer. This provides a significant benefit when switching between transmit mode and transmit-disable mode. Stored energy due to bias currents will cancel within the transformer and prevent switching transients from reaching the load.

MAX3517

The MAX3517 uses external matching resistors to allow matching to various load impedances through suitable values of matching resistors and transformer turns ratios.

Serial Interface

The serial interface has an active-low enable (\overline{CS}) to bracket the data, with data clocked in MSB first on the rising edge of SCLK. Data is stored in the storage latch on the rising edge of \overline{CS} . The serial interface controls

Upstream CATV Amplifiers

the state of the PGA and the output amplifiers. Tables 1 and 2 show the register format. Serial-interface timing is shown in Figure 1.

Applications Information

High-Power and Low-Noise Modes

The MAX3514/MAX3516/MAX3517 have two transmit modes, high power (HP) and low noise (LN). Each of these modes is actuated by the high-order bit D7 of the 8-bit programming word. When D7 is a logic 1, HP mode is enabled. When D7 is a logic 0, LN mode is enabled.

Each of these modes is characterized by the activation of a distinct output stage. In HP mode, the output stage exhibits 15dB higher gain than LN mode. The lower gain of the LN output stage allows for significantly lower

output noise and lower transmit/transmit-disable transients.

The full range of gain codes (D6–D0) may be used in either mode. For DOCSIS applications, HP mode is recommended for output levels at or above +42dBmV (MAX3514, D7 = 1, gain code = 87), LN mode when the output level is below +42dBmV (MAX3514, D7 = 0, gain code = 115).

Shutdown Mode

In normal operation, the shutdown pin ($\overline{\text{SHDN}}$) is held high. When $\overline{\text{SHDN}}$ is taken low, all circuits within the IC are disabled. Only leakage currents flow in this state. Data stored within the serial-data interface latches will

Table 1. Serial-Interface Control Word

| BIT | MNEMONIC | DESCRIPTION |
|-------|----------|----------------------------------|
| MSB 7 | D7 | High-power/low-noise mode select |
| 6 | D6 | Gain code, bit 6 |
| 5 | D5 | Gain code, bit 5 |
| 4 | D4 | Gain code, bit 4 |
| 3 | D3 | Gain code, bit 3 |
| 2 | D2 | Gain code, bit 2 |
| 1 | D1 | Gain code, bit 1 |
| LSB 0 | D0 | Gain code, bit 0 |

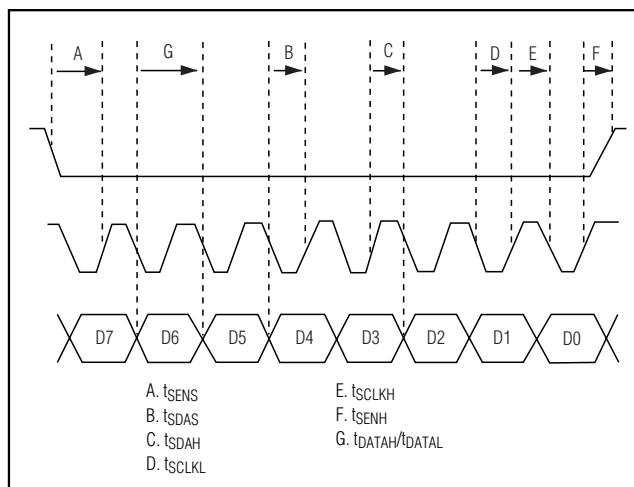


Figure 1. Serial-Interface Timing Diagram

Table 2. Chip State Control Bits

| $\overline{\text{SHDN}}$ | TXEN | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | GAIN CODE (DECIMAL) | GAIN* (DB) | STATES |
|--------------------------|------|----|----|----|----|----|----|----|----|---------------------|------------|----------------------------------|
| 0 | X | X | X | X | X | X | X | X | X | | | Shutdown Mode |
| 1 | 0 | X | X | X | X | X | X | X | X | | | Transmit-Disable Mode |
| 1 | 1 | 1 | X | X | X | X | X | X | X | | | Transmit-Enable Mode, High Power |
| 1 | 1 | 0 | X | X | X | X | X | X | X | | | Transmit-Enable Mode, Low Noise |
| 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 48 | -26 | |
| 1 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 80 | -10 | |
| 1 | 1 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 115 | 8 | |
| 1 | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 87 | 9 | |
| 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 110 | 20 | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 125 | 28 | |

*Typical Gain at +25°C, VCC = 5.0V

Upstream CATV Amplifiers

be lost upon entering this mode. Current consumption is reduced to 10 μ A (typ) in shutdown mode.

Output Match

MAX3514/MAX3516

When used in conjunction with a 2:1 voltage-ratio transformer, the MAX3514/MAX3516 are internally resistively matched to 75 Ω . This internal resistor is across the OUT+ and OUT- terminals.

To improve the match at the high end of the frequency range (65MHz), a reactive match may be employed as part of the ensuing diplex filter. A series inductor (typ 180nH) followed by a shunt capacitor (typ 33 μ F) can be placed directly after the output transformer. This match will also improve the gain flatness substantially.

As mentioned above, the matching components may be incorporated into the diplex filter design. Optimize the input impedance of the diplex filter to be 35 + j35 (typ) at 65MHz when using the specified output transformer.

MAX3517

The MAX3517 does not have an internal matching resistor. This allows the device performance to be optimized for various load impedances.

When 300 Ω resistors are placed across the output terminals of the device, performance identical to the MAX3514 will result. If an impedance higher than 300 Ω is used, additional gain will result.

Note also that a 2:1 voltage-ratio output transformer is not needed.

When operating the device with arbitrary output resistance and XFMR turns ratio, take care not to exceed the allowable power dissipation (see the *Absolute Maximum Ratings*).

Transformer

To match the output of the MAX3514/MAX3516 to a 75 Ω load, a 2:1 voltage-ratio transformer is required. This transformer must have adequate bandwidth to cover the intended application. Note that most RF transformers specify bandwidth with a 50 Ω source on the primary and a matching resistance on the secondary winding. Operating in a 75 Ω system will tend to shift the low-frequency edge of the transformer bandwidth specification up by a factor of 1.5 due to primary inductance. Keep this in mind when specifying a transformer.

Bias to the output stage is provided through the center tap on the transformer primary. This greatly diminishes the on/off transients present at the output when switching between transmit and transmit-disable modes. Commercially available transformers typically have

adequate balance between half-windings to achieve substantial transient cancellation.

Finally, keep in mind that transformer core inductance varies proportionally with temperature. If the application requires low temperature extremes (less than 0 $^{\circ}$ C), adequate primary inductance must be present to sustain low-frequency output capability as temperatures drop. In general, this will not be a problem as modern RF transformers have adequate bandwidth.

Input Circuit

To achieve rated performance, the inputs of the MAX3514/MAX3516/MAX3517 must be driven differentially with an appropriate input level. The differential input impedance is approximately 1.5k Ω . Most applications will require a differential low-pass filter preceding the device. The filter design will dictate a terminating impedance of a specified value. Place this load impedance across the AC-coupled input pins (see the *Typical Operating Circuit*).

The MAX3514/MAX3517 have sufficient gain to produce an output level of +61dBmV (QPSK through a 2:1 transformer) when driven with a +34dBmV input signal. The MAX3516 provides an additional 3dB of gain and output level. When a lower input level is present, the maximum output level will be reduced proportionally and output linearity will increase. If an input level greater than +34dBmV is used, the 3rd-order distortion performance will degrade slightly.

If single-ended sources drive the MAX3514/MAX3516/MAX3517, one of the input terminals must be capacitively coupled to ground (IN+ or IN-). The value of this capacitor must be large enough to look like a short circuit at the lowest frequency of interest. For operation at 5MHz with a 75 Ω source impedance, a value of 0.001 μ F will suffice.

Layout Issues

A well-designed PC board is an essential part of an RF circuit. For best performance, pay attention to power-supply layout issues, as well the output circuit layout.

Output Circuit Layout

The differential implementation of the MAX3514/MAX3516/MAX3517s' output has the benefit of significantly reducing even-order distortion, the most significant of which is 2nd-harmonic distortion. The degree of distortion cancellation depends on the amplitude and phase balance of the overall circuit. It is important to keep the trace lengths from the output pins equal.

Upstream CATV Amplifiers

MAX3514/MAX3516/MAX3517

Power-Supply Layout

For minimal coupling between different sections of the IC, the ideal power-supply layout is a star configuration. This configuration has a large-value decoupling capacitor at the central power-supply node. The power-supply traces branch out from this node, each going to a separate power-supply node in the circuit. At the end of each of these traces is a decoupling capacitor that provides a very low impedance at the frequency of interest. This arrangement provides local power-supply decoupling at each power-supply pin.

The power-supply traces must be made as thick as practical.


Ground inductance degrades distortion performance. Therefore, ground plane connections to pin 4 and pin 20 should be made with multiple vias if necessary.

Exposed Paddle Thermal Considerations

The exposed paddle (EP) of the MAX3516's 20-pin TSSOP-EP package provides a low thermal-resistance path to the die. It is important that the PC board on which the MAX3516 is mounted, be designed to conduct heat from this contact. In addition, the EP should be provided with a low inductance path to electrical ground.

It is recommended that the EP be soldered to a ground plane on the PC board, either directly or through an array of plated via holes.

Typical Operating Circuit

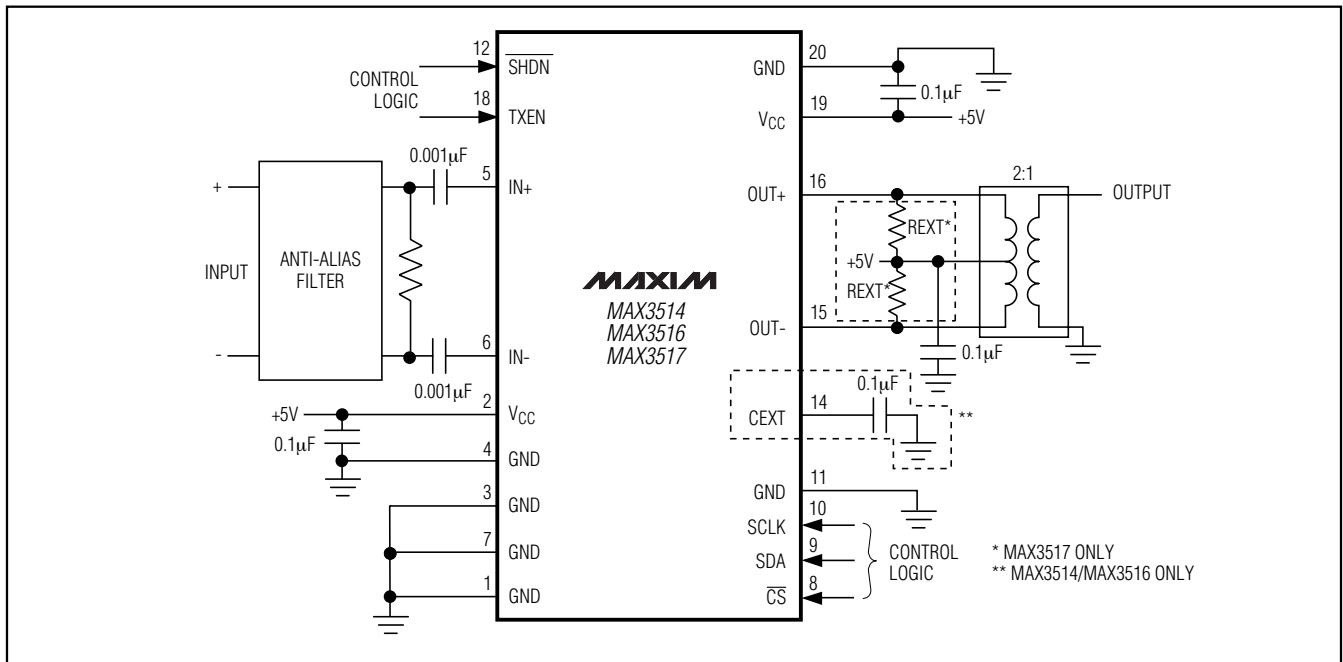

Chip Information

TRANSISTOR COUNT: 1006

Upstream CATV Amplifiers

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

TOP VIEW

BOTTOM VIEW

SIDE VIEW

END VIEW

DETAIL A

LEAD TIP DETAIL

| Symbol | COMMON DIMENSIONS | | | |
|----------------|-------------------|------|----------------|------|
| | MILLIMETERS | | INCHES | |
| | MIN. | MAX. | MIN. | MAX. |
| A | — | 1.10 | — | .043 |
| A ₁ | 0.05 | 0.15 | .002 | .006 |
| A _e | 0.85 | 0.95 | .033 | .037 |
| b | 0.19 | 0.30 | .007 | .012 |
| b ₁ | 0.19 | 0.25 | .007 | .010 |
| c | 0.09 | 0.20 | .004 | .008 |
| c ₁ | 0.09 | 0.14 | .004 | .006 |
| D | SEE VARIATIONS | | SEE VARIATIONS | |
| E | 4.30 | 4.50 | .169 | .177 |
| e | 0.65 BSC | | .026 BSC | |
| H | 6.25 | 6.55 | .246 | .258 |
| L | 0.50 | 0.70 | .020 | .028 |
| N | SEE VARIATIONS | | SEE VARIATIONS | |
| ∅ | 0° | 8° | 0° | 8° |

| JEDEC | N | VARIATIONS | | | | |
|-------|----|-------------|------|--------|------|------|
| | | MILLIMETERS | | INCHES | | |
| | | MIN. | MAX. | MIN. | MAX. | |
| AB-1 | 14 | D | 4.90 | 5.10 | .193 | .201 |
| AB | 16 | D | 4.90 | 5.10 | .193 | .201 |
| AC | 20 | D | 6.40 | 6.60 | .252 | .260 |
| AD | 24 | D | 7.70 | 7.90 | .303 | .311 |
| AE | 28 | D | 9.60 | 9.80 | .378 | .386 |

NOTES:

1. DIMENSIONS D AND E DO NOT INCLUDE FLASH
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm PER SIDE
3. CONTROLLING DIMENSION: MILLIMETER
4. MEETS JEDEC OUTLINE MO-153. SEE JEDEC VARIATIONS TABLE
5. "N" REFERS TO NUMBER OF LEADS

△ THE LEAD TIPS MUST LIE WITHIN A SPECIFIED ZONE. THIS TOLERANCE ZONE IS DEFINED BY TWO PARALLEL PLANES. ONE PLANE IS THE SEATING PLANE, DATUM [-C-]; THE OTHER PLANE IS AT THE SPECIFIED DISTANCE FROM [-C-] IN THE DIRECTION INDICATED

-DRAWING NOT TO SCALE-

| | |
|---|---------------------------------|
| | MAXIM |
| TITLE: PACKAGE OUTLINE, TSSOP 4.40mm BODY | |
| APPROVAL | DOCUMENT CONTROL NO. 21-0066 |
| REV. G | 1/1 |

Upstream CATV Amplifiers

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

MAX3514/MAX3516/MAX3517

| DIM | INCHES | | MILLIMETERS | |
|-----|----------------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | .053 | .069 | 1.35 | 1.75 |
| A1 | .004 | .010 | .102 | .254 |
| A2 | .049 | .065 | 1.245 | 1.651 |
| B | .008 | .012 | 0.20 | 0.30 |
| C | .0075 | .0098 | 0.191 | 0.249 |
| D | SEE VARIATIONS | | | |
| E | .150 | .157 | 3.81 | 3.99 |
| e | .025 BSC | | 0.635 BSC | |
| H | .230 | .244 | 5.84 | 6.20 |
| h | .010 | .016 | 0.25 | 0.41 |
| L | .016 | .035 | 0.41 | 0.89 |
| N | SEE VARIATIONS | | | |
| α | 0° | 8° | 0° | 8° |

| DIM | INCHES | | MILLIMETERS | | N |
|-----|--------|-------|-------------|-------|-------|
| | MIN. | MAX. | MIN. | MAX. | |
| D | .189 | .196 | 4.80 | 4.98 | 16 AB |
| S | .0020 | .0070 | 0.05 | 0.18 | |
| D | .337 | .344 | 8.56 | 8.74 | 20 AD |
| S | .0500 | .0550 | 1.270 | 1.397 | |
| D | .337 | .344 | 8.56 | 8.74 | 24 AE |
| S | .0250 | .0300 | 0.635 | 0.762 | |
| D | .386 | .393 | 9.80 | 9.98 | 28 AF |
| S | .0250 | .0300 | 0.635 | 0.762 | |

NOTES:
 1). D & E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
 2). MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .006" PER SIDE.
 3). CONTROLLING DIMENSIONS: INCHES.
 4). MEETS JEDEC MO137.

DALLAS SEMICONDUCTOR **MAXIM**

PROPRIETARY INFORMATION

TITLE: PACKAGE OUTLINE, QSOP .150", .025" LEAD PITCH

| | | | |
|----------|---------------------------------|--------|-----|
| APPROVAL | DOCUMENT CONTROL NO. 21-0055 | REV. F | 1/1 |
|----------|---------------------------------|--------|-----|

Revision History

Pages changed at Rev 4: 5, 21

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 21

© 2006 Maxim Integrated Products

MAXIM is a registered trademark of Maxim Integrated Products, Inc.