


HFBR-57M5AP

Digital Diagnostic Small Form Pluggable Transceiver for Fibre Channel 2.125, 1.0625 GBd and 1.25 GBd Ethernet



Data Sheet

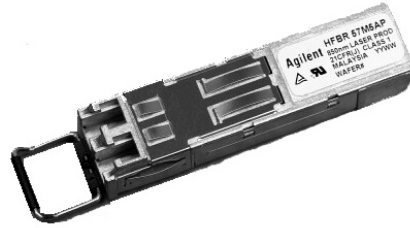

Description

The HFBR-57M5AP is a state of the art transceiver designed to provide a cost effective, high performance solution for 2.125 GBd Fibre Channel, 1.0625 GBd Fibre Channel and 1.25 GBd Ethernet applications.

As an enhancement to the conventional SFP interface defined in SFF-8074i, the HFBR-57M5AP implements the digital diagnostic interface MSA SFF-8472. Real time monitors of temperature, supply voltage, laser bias current, laser average output power and received input power OMA are provided via a two-wire serial interface. This information is an addition to the conventional SFP data.

Installation

The HFBR-57M5AP can be installed in any SFF-8074i compliant Small Form Pluggable (SFP) port. The HFBR-57M5AP is hot-pluggable, allowing the module to be installed while the host system is operating and on-line. Upon insertion, the transceiver housing makes initial contact with the host board SFP cage, mitigating potential damage due to Electro-Static Discharge (ESD).

Related Products

- HFBR-0534: Evaluation Kit for Avago Technologies SFP's with Diagnostic Monitoring Interface (DMI)
- HFBR-5720AL/ALP: 850 nm +3.3 V LC SFP for 2.125/1.0625 GBd Fibre Channel
- HFBR-5921AL: 850 nm +3.3 V LC SFF 2x5 for 2.125/1.0625 GBd Fibre Channel
- HDMP-2630/2631: +3.3 V 2.125/1.0625 GBd SerDes TRx family of Physical Layer ICs
- HDMP-0552: +3.3 V Quad Port Bypass Circuit for 2.125/1.0625 GBd FC-AL applications
- HPFC-5000 Series Tachyon Fibre Channel Protocol ICs for 2.125/1.0625 GBd Applications

Features

- SFF-8472 Diagnostic Monitoring Interface (DMI) for Optical Transceivers with real time monitors of:
 - Transmitted Optical Power
 - Received Optical Power
 - Laser Bias Current
 - Temperature
 - Supply Voltage
- SFP Transceiver Specification
 - SFF-8074i (Rev 1.0)
 - SFF-8472 (Rev 9.3)
 - 2.125 GBd operation for FC-PI 200-M5-SN-I
 - 1.0625 GBd operation for FC-PI 100-M5-SN-I
 - 1.250 GBd operation for IEEE 802.3 Gigabit Ethernet 1000BASE-SX
- Alarms and warnings to indicate status of real time monitors
- LC Duplex optical connector interface conforming to ANSI TIA/EIA604-10 (FOCIS 10)
 - Wide temperature and supply voltage operation
- High reliability < 100 FIT @ +50 °C
- 850 nm VCSEL Source Technology
- IEC 60825-1 Class 1/CDRH Class 1 laser eye safe

Applications

- Fibre Channel Systems
 - Director Class Switches
 - Fabric Switches
 - HBA Cards
- Mass Storage

Digital Diagnostic Interface and Serial Identification

The 2-wire serial protocol is based on the ATMEL AT-24C01A series EEPROM protocol and signaling detail. The HFBR-57M5AP contains conventional SFP memory per SFF-8074i as well as additional memory (address 0xA2) for new digital diagnostic information.

The new diagnostic information provides the opportunity for Predictive Failure Identification, Compliance Prediction, Fault Isolation and Component Monitoring.

Predictive Failure Identification

The diagnostic information allows the host system to identify potential link problems. Once identified, a "fail over" technique can be used to isolate and replace suspect devices before system uptime is impacted.

Compliance Monitoring

The real-time diagnostic parameters can be monitored to alert the system when operating limits are exceeded and compliance cannot be ensured. Real time transceiver diagnostics information can also be combined with system level monitoring to verify that performance and operating environments are meeting the intended design requirements.

Fault Isolation

The diagnostic information can allow the host to pinpoint the location of a link problem and accelerate system servicing and minimize downtime.

Transmitter Section

The transmitter section includes an 850 nm VCSEL (Vertical Cavity Surface Emitting Laser) light source and a transmitter driver circuit. The driver circuit maintains a constant optical power level provided that the data pattern is valid Fibre Channel and Ethernet 8B/10B coded data. Connection to the transmitter is provided via an LC optical connector.

TX_DISABLE

The transmitter output can be disabled by asserting pin 3, TX_DISABLE. A high signal asserts this function while a low signal allows normal laser operation. The transmitter output can also be disabled and monitored via the two-wire serial. In the event of a transceiver fault, such as the activation of the eye safety circuit, toggling of the TX_DISABLE will reset the transmitter as depicted in Figure 5.

TX_FAULT

A laser fault will activate the transmitter signal, TX_FAULT and disable the laser. This signal is an open collector output (pull-up required on the host board); A low signal indicates normal laser operation and a high signal indicates a fault. The TX_FAULT will be latched high when a laser fault occurs and is cleared by toggling the TX_DISABLE input or power cycling the transceiver. The TX_FAULT is not latched for Low Vcc. The transmitter fault condition can also be monitored via the two-wire serial interface (address A2, byte 110, bit 2).

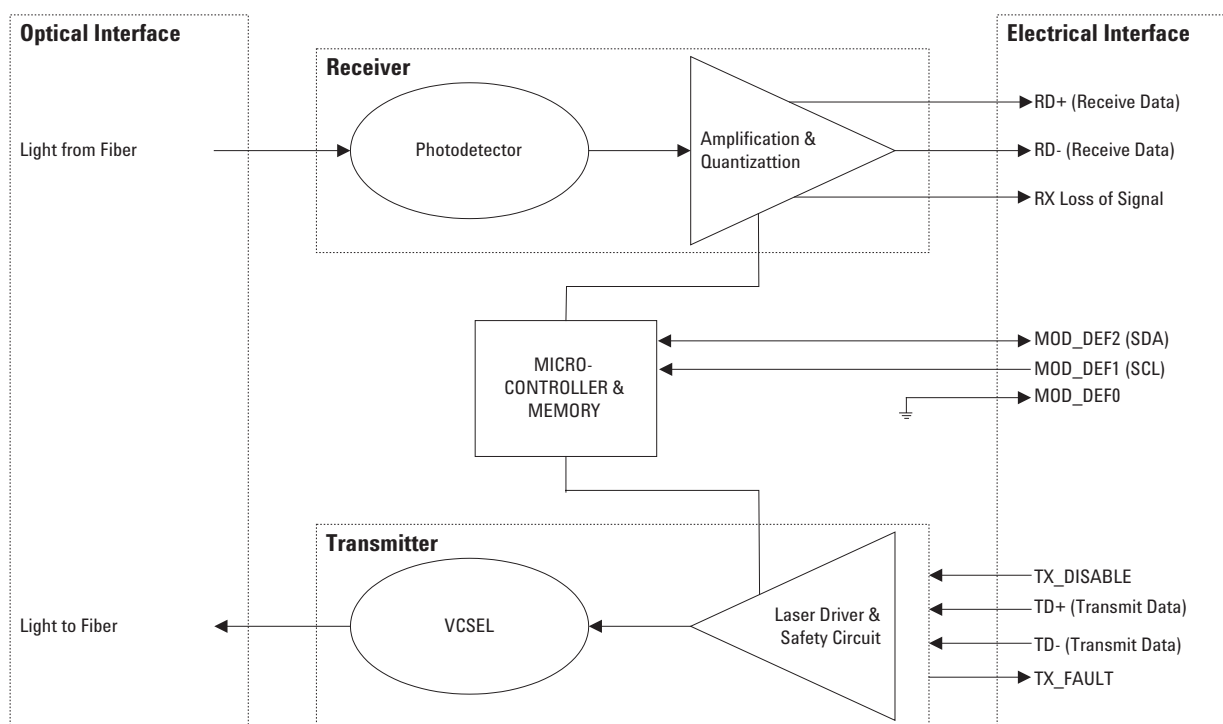


Figure 1. Transceiver Functional Diagram

Eye Safety Circuit

Under normal operating conditions laser power will be maintained below Class 1 eye-safety limits. Should a catastrophic laser fault occur and optical power become uncontrolled, the laser driver will detect the fault, shut down the laser and assert TX_FAULT output.

Receiver Section

The receiver section includes a PIN detector with amplification and quantization circuits. Optical connection to the receiver is provided via an LC optical connector.

RX_LOS

The receiver section contains a loss of signal (RX_LOS) circuit to indicate when the optical input signal power is insufficient for Fibre Channel compliance. A high signal indicates loss of modulated signal, indicating link failure such as a broken fiber or a failed transmitter. RX_LOS can be also be monitored via the two-wire serial (address A2, byte 110, bit 1).

Functional Data I/O

Avago Technologies' HFBR-57M5AP fiber-optic transceiver is designed to accept industry standard differential signals. The transceiver has internally ac-coupled data inputs and outputs. Bias resistors and coupling capacitors have been included within the module to reduce the number of components required on the customer's board. Figure 2 illustrates the recommended interface circuit.

Application Support

An Evaluation Kit and Reference Designs are available to assist in evaluation of the HFBR-57M5AP.

Please contact your local Field Sales representative for availability and ordering details.

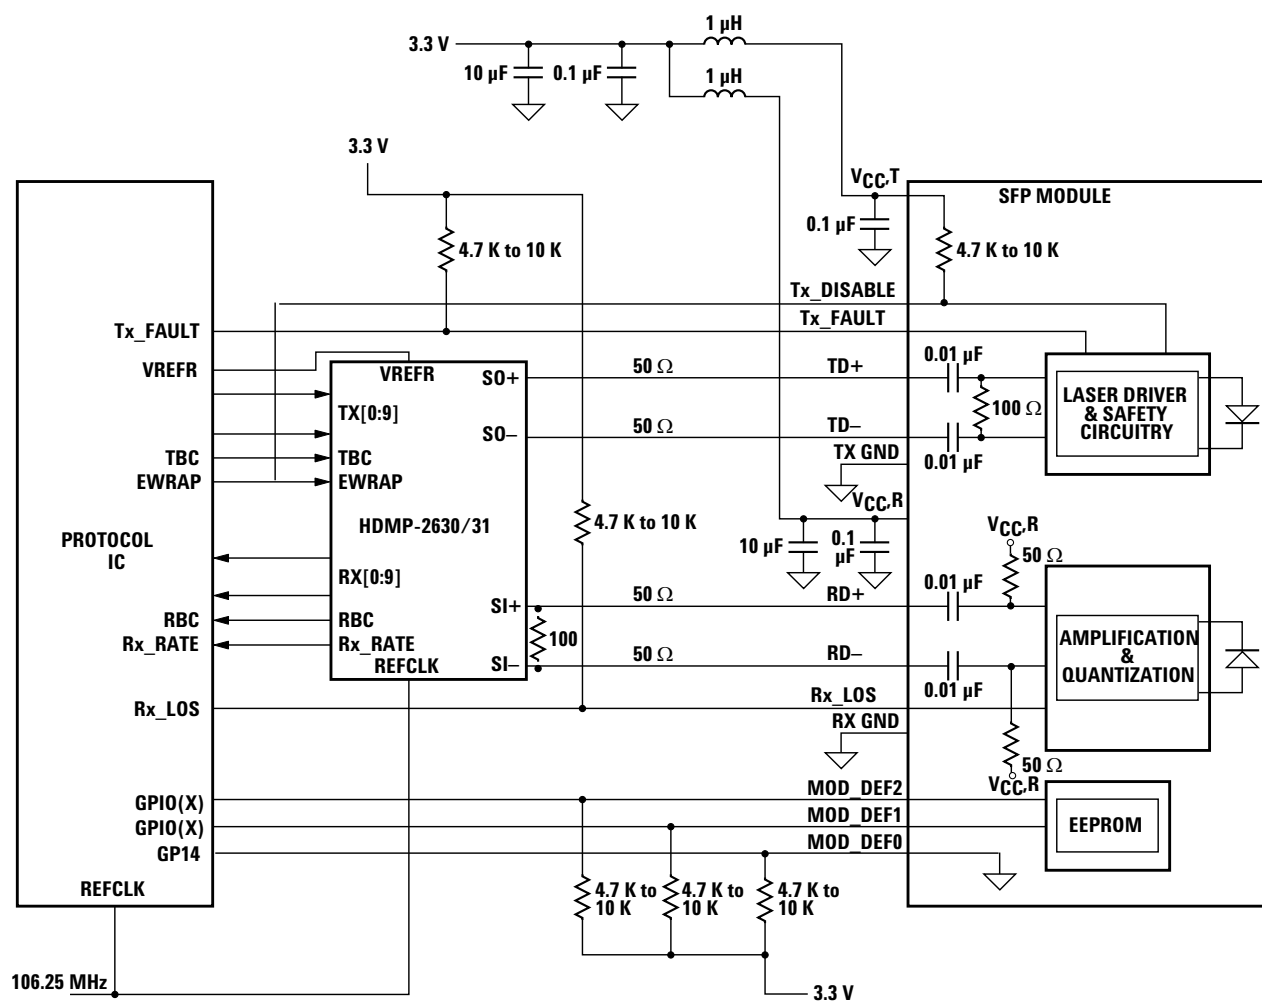


Figure 2. Typical Application Configuration

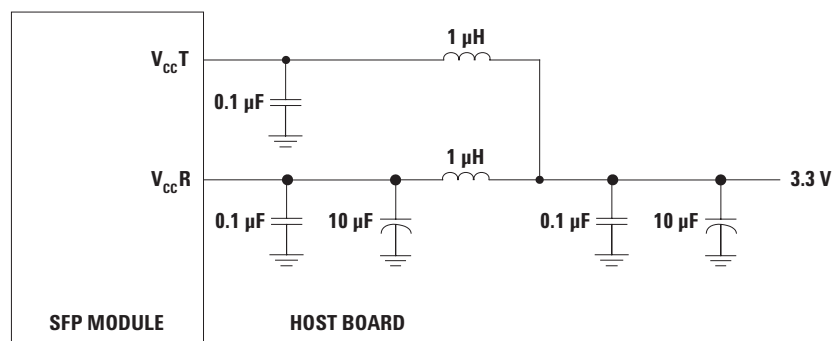


Figure 3. Recommended Power Supply Filter

Regulatory Compliance

The transceiver Regulatory Compliance performance is provided in Table 1 as a figure of merit to assist the designer. The overall equipment design will determine the certification level.

Electrostatic Discharge (ESD)

Normal ESD handling precautions for ESD sensitive devices should be followed while using these transceivers. These precautions include using grounded wrist straps, work benches and floor mats in ESD controlled areas. Additionally, static discharges to the exterior of the equipment chassis containing the transceiver parts must also be considered.

Electromagnetic Interference (EMI)

Most equipment designs using the HFBR-57M5AP are subject to the requirements of the FCC in the United

States, CENELEC EN55022 (CISPR 22) in Europe and VCCI in Japan. The metal housing and shielded design of the HFBR-57M5AP provides excellent EMI performance.

Eye Safety

The HFBR-57M5AP transceivers provide Class 1 eye safety by design. Avago Technologies has tested the transceiver design for regulatory compliance, under normal operating conditions and under a single fault condition. See Table 1.

Flammability

The HFBR-57M5AP is compliant to UL 94V-0.

Reliability

These transceivers have an estimated failure rate of < 100 FITs @ +50 °C.

Table 1. Regulatory Compliance

| Feature | Test Method | Performance |
|--|---|---|
| Electrostatic Discharge (ESD) to the Electrical Pins | MIL-STD-883C Method 3015.4 JEDEC | Class 2 (>2000 Volts) |
| Electrostatic Discharge (ESD) to the Optical Connector | Variation of IEC 801-2 | Air discharge of 15 kV (min) contact to connector w/o damage |
| Electromagnetic Interference (EMI) | FCC Class B CENELEC EN55022 Class B (CISPR 22A) VCCI Class 1 | System margins are dependent on customer board and chassis design |
| Immunity | Variation of IEC 61000-4-3 | Less than 0.5 dB of Rx sensitivity degradation and less than 10% margin reduction of Tx mask at 10 V/m, 10 MHz to 1 GHz w/o chassis enclosure |
| Laser Eye Safety and Equipment Type Testing | US FDA CDRH AEL Class 1 US21 CFR, Subchapter J per Paragraphs 1002.10 and 1002.12 (IEC) EN60825-1: 1994 + A11+A2 (IEC) EN60825-2: 1994 + A1 (IEC) EN60950: 1992 + A1 + A2 + A3 + A4 + A11 | CDRH certification #: 9720151-31 TUV file #: E2171216.02 |
| Component Recognition | Underwriters Laboratories and Canadian Standards Association Joint Component Recognition for Information Technology Equipment Including Electrical Business Equipment | UL file #: E173874 |

Pin Out Table

| Pin | Name | Function/Description | Notes |
|-----|-------------------|--|-------|
| 1 | V _{EE} T | Transmitter Ground | |
| 2 | TX_FAULT | Transmitter Fault Indication - High indicates a fault condition | 1 |
| 3 | TX_DISABLE | Transmitter Disable - Module optical output disables on high or open | 2 |
| 4 | MOD-DEF2 | Module Definition 2 - Two wire serial ID interface data line (SDA) | 3 |
| 5 | MOD-DEF1 | Module Definition 1 - Two wire serial ID interface clock line (SCL) | 3 |
| 6 | MOD-DEF0 | Module Definition 0 - Grounded in module (module present indicator) | 3 |
| 7 | | No connect | |
| 8 | RX_LOS | Loss of Signal - High indicates loss of received optical signal | 4 |
| 9 | V _{EE} R | Receiver Ground | |
| 10 | V _{EE} R | Receiver Ground | |
| 11 | V _{EE} R | Receiver Ground | |
| 12 | RD- | Inverse Received Data Out | 5 |
| 13 | RD+ | Received Data Out | 5 |
| 14 | V _{EE} R | Receiver Ground | |
| 15 | V _{CC} R | Receiver Power +3.3 V | 6 |
| 16 | V _{CC} T | Transmitter Power +3.3 V | 6 |
| 17 | V _{EE} T | Transmitter Ground | |
| 18 | TD+ | Transmitter Data In | 7 |
| 19 | TD- | Inverse Transmitter Data In | 7 |
| 20 | V _{EE} T | Transmitter Ground | |

Notes:

- TX_FAULT is an open collector/drain output, which should be pulled up with a 4.7 k – 10 kΩ resistor on the host board. When high, this output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8 V.
- TX_DISABLE is an input that is used to shut down the transmitter optical output. It is pulled up within the transceiver with a 4.7 k – 10 kΩ resistor.
Low (0 – 0.8 V): Transmitter on
Between (0.8 V and 2.0 V): Undefined
High (2.0 – V_{CC} max): Transmitter Disabled
Open: Transmitter Disabled
- The signals Mod-Def 0, 1, 2 designate the two wire serial interface pins. They should be pulled up with a 4.7 k – 10 kΩ resistor on the host board.
Mod-Def 0 is grounded by the module to indicate the module is present
Mod-Def 1 is serial clock line (SCL) of two wire serial interface
Mod-Def 2 is serial data line (SDA) of two wire serial interface
- RX_LOS (Rx Loss of Signal) is an open collector/drain output that should be pulled up with a 4.7 k – 10 kΩ resistor on the host board. When high, this output indicates the received optical power is below the worst case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8 V.
- RD-/+ designate the differential receiver outputs. They are ac coupled 100 Ω differential lines which should be terminated with 100 Ω differential at the host SerDes. Ac coupling is done inside the transceiver and is not required on the host board. The voltage swing on these lines will be between 400 and 2000 mV differential (200 – 1000 mV single ended) when properly terminated.
- V_{CC}R and V_{CC}T are the receiver and transmitter power supplies. They are defined at the SFP connector pin. The maximum supply current is 300 mA and the associated inrush current will typically be no more than 30 mA above steady state after 500 nanoseconds.
- TD-/+ designate the differential transmitter inputs. They are ac coupled differential lines with 100 Ω differential termination inside the module. The ac coupling is done inside the module and is thus not required on the host board. The inputs will accept differential swings of 500 – 2400 mV (250 – 1200 mV single ended), though it is recommended that values between 500 and 1200 mV differential (250 – 600 mV single ended) be used for best EMI performance.

Absolute Maximum Ratings

| Parameter | Symbol | Minimum | Maximum | Unit | Notes |
|-------------------------------|----------------------|---------|-----------------------|------|---------|
| Case Operating Temperature | T _C | -50 | +100 | °C | 1, 2 |
| Ambient Operating Temperature | T _A | -50 | +100 | °C | 1, 2 |
| Relative Humidity | RH | 5 | 95 | % | 1 |
| Module Supply Voltage | V _{CC} T, R | -0.5 | 4.0 | V | 1, 2, 3 |
| Control Input Voltage | V _{IN} | -0.5 | V _{CC} + 0.5 | V | 1 |

Notes:

1. Absolute Maximum Ratings are those values beyond which damage to the device may occur if these limits are exceeded for other than a short period of time. See Reliability Data Sheet for specific reliability performance.
2. Between Absolute Maximum Ratings and the Recommended Operating Conditions functional performance is not intended, device reliability is not implied, and damage to the device may occur over an extended period of time.
3. See Figure 3 for the recommended power connection.

Recommended Operating Conditions

| Parameter | Symbol | Minimum | Maximum | Unit | Notes |
|-------------------------------|----------------------|---------|---------|------|-------|
| Case Operating Temperature | T _C | -10 | +85 | °C | 1, 2 |
| Ambient Operating Temperature | T _A | -10 | +75 | °C | 1 |
| Module Supply Voltage | V _{CC} T, R | 2.97 | 3.63 | V | 2 |
| Data Rate | | 1.0625 | 2.125 | Gb/s | 2 |

Notes:

1. The Ambient Operating Temperature limitations are based on the Case Operating Temperature limitations and are subject to the host system thermal design.
2. Recommended Operating Conditions are those values for which functional performance and device reliability is implied.

Transceiver Electrical Characteristics

TC = -10 °C to +85 °C, V_{CC}T, V_{CC}R = 3.3 V ± 10%

| Parameter | Symbol | Minimum | Typical | Maximum | Unit | Notes |
|--------------------------------------|-------------------|---------|---------|----------------------------|------|-------|
| AC Electrical Characteristics | | | | | | |
| Power Supply Noise Rejection (pk-pk) | PSNR | | 100 | | mV | 1 |
| DC Electrical Characteristics | | | | | | |
| Module Supply Current | I _{CC} | | | 210 | mA | |
| Power Dissipation | P _{DISS} | | | 726 | mW | |
| Sense Outputs | | | | | | |
| Transmit Fault (TX_FAULT) | V _{OH} | 2.4 | | V _{CC} T, R + 0.3 | V | 2 |
| Loss of Signal (RX_LOS) | | | | | | |
| MOD_DEF 2 | V _{OL} | | | 0.4 | V | |
| Control Inputs | | | | | | |
| Transmit Disable (TX_DISABLE) | V _{IH} | 2.0 | | V _{CC} | V | 2 |
| MOD_DEF1, MOD_DEF2 | V _{IL} | 0 | | 0.8 | V | |

Notes:

1. Filter per SFP specification is required on host board to remove 10 Hz to 2 MHz content.
2. Pulled up externally with a 4.7 k – 10 kΩ resistor on the host board to 3.3 V.

Transceiver Electrical Characteristics

TC = -10 °C to +85 °C, V_{CC}T, V_{CC}R = 3.3 V ± 10%

| Parameter | Symbol | Minimum | Typical | Maximum | Unit | Notes |
|--|----------------|---------|---------|-------------|----------|-------|
| Data Input: | | | | | | |
| Transmitter Differential Input Voltage (TD±) | V _I | 350 | | 2400 | mV | 1 |
| Data Output: | | | | | | |
| Receiver Differential Output Voltage (RD±) | V _O | 500 | | 2000 | mV | 2 |
| Contributed Deterministic Jitter (Receiver) 2.125 Gb/s | DJ | | | 0.1 47 | UI ps | 3 |
| Contributed Deterministic Jitter (Receiver) 1.0625 Gb/s | DJ | | | 0.12 113 | UI ps | 3 |
| Contributed Total Jitter (Receiver) 2.125 Gb/s | TJ | | | 0.26 123 | UI ps | 4 |
| Contributed Total Jitter (Receiver) 1.0625 Gb/s | TJ | | | 0.22 205 | UI ps | 4 |
| Receive Data Electrical Rise & Fall Times (Receiver) | tr, tf | | 100 | 250 | ps | 5 |

Notes:

1. Internally ac coupled and terminated (100 Ohm differential).
2. Internally ac coupled but requires an external load termination (100 Ohm differential).
3. Contributed DJ is measured on an oscilloscope in average mode with 50% threshold and K28.5 pattern
4. Contributed RJ is calculated for 1x10⁻¹² BER by multiplying the RMS jitter (measured on a single rise or fall edge) from the oscilloscope by 14. Per FC-P1 (Table 13 - MM jitter output, note 1), the actual contributed RJ is allowed to increase above its limit if the actual contributed DJ decreases below its limits, as long as the component output DJ and TJ remain within their specified FC-P1 maximum limits with the worst case specified component jitter input.
5. 20%-80% electrical rise & fall times measured with a 500 MHz signal utilizing a 1010 data pattern.

Transmitter Optical Characteristics

TC = -10 °C to +85 °C, V_{CC}T, V_{CC}R = 3.3 V ± 10%

| Parameter | Symbol | Minimum | Typical | Maximum | Unit | Notes |
|---|------------------|---------|---------|-------------|----------|--------|
| Modulated Optical Output Power (OMA, pk-pk) 2.125 Gb/s | OMA | 196 | | | μW | 3 |
| Modulated Optical Output Power (OMA, pk-pk) 1.0625 Gb/s | OMA | 156 | | | μW | 4 |
| Average Optical Output Power | P _{OUT} | -9.5 | | | dBm | 1, 2 |
| Optical Extinction Ratio | ER | 9 | | | dB | |
| Center Wavelength | λ _c | 830 | | 860 | nm | |
| Spectral Width - rms | s, rms | | | 0.85 | nm | |
| Optical Rise/Fall Time 2.125 Gb/s | tr, tf | | | 150 | ps | 20-80% |
| Optical Rise/Fall Time 1.0625 Gb/s | tr, tf | | | 300 | ps | 20-80% |
| RIN ₁₂ (OMA) | RIN | | | -117 | dB/Hz | |
| Contributed Deterministic Jitter (Transmitter) 2.125 Gb/s | DJ | | | 0.12 56 | UI ps | 5 |
| Contributed Deterministic Jitter (Transmitter) 1.0625 Gb/s | DJ | | | 0.09 85 | UI ps | 5 |
| Contributed Total Jitter (Transmitter) 2.125 Gb/s | TJ | | | 0.25 120 | UI ps | 6 |
| Contributed Total Jitter (Transmitter) 1.0625 Gb/s | TJ | | | 0.27 252 | UI ps | 6 |
| P _{OUT} TX_DISABLE Asserted | P _{OFF} | | | -35 | dBm | |

Notes:

1. Max P_{out} is the lesser of Class 1 safety limits (CDRH and EN 60825) or receiver power, max.
2. Into 62.5/125 μm (0.275 NA) and 50/125 μm (0.2 NA) multimode optical fiber.
3. An OMA of 196 μW is approximately equal to an average power of -9 dBm assuming an Extinction Ratio of 9 dB.
4. An OMA of 156 μW is approximately equal to an average power of -10 dBm assuming an Extinction Ratio of 9 dB.
5. Contributed DJ is measured on an oscilloscope in average mode with 50% threshold and K28.5 pattern.
6. Contributed RJ is calculated for 1x10⁻¹² BER by multiplying the RMS jitter (measured on a single rise or fall edge) from the oscilloscope by 14. Per FC-PI (Table 13 - MM jitter output, note 1), the actual contributed RJ is allowed to increase above its limit if the actual contributed DJ decreases below its limits, as long as the component output DJ and TJ remain within their specified FC-PI maximum limits with the worst case specified component jitter input.

Receiver Optical Characteristics

TC = -10 °C to +85 °C, V_{CC}T, V_{CC}R = 3.3 V ± 10%

| Parameter | Symbol | Minimum | Typical | Maximum | Unit | Notes |
|--|--------------------------------|-----------|---------|-------------|--------------------------|--|
| Input Optical Power | P _{IN} | | | 0 | dBm avg | |
| Input Optical Modulation Amplitude (OMA, Pk-Pk) 2.125 Gb/s | OMA | 49 | | | μW, OMA | 1, 6 |
| Input Optical Modulation Amplitude (OMA, Pk-Pk) 1.0625 Gb/s | OMA | 31 | | | μW, OMA | 2, 6 |
| Input Optical Modulation Amplitude (OMA, Pk-Pk) 1.25 Gb/s | OMA | 31 | | | μW, OMA | 2, 6 |
| Stressed receiver sensitivity (OMA) 2.125 Gb/s | | 96 109 | | | μW, OMA | 50/125 μm fiber, 62.5/125 μm fiber, 3 |
| Stressed receiver sensitivity (OMA) 1.0625 Gb/s | | 55 67 | | | μW, OMA | 50/125 μm fiber, 62.5/125 μm fiber, 4 |
| Return Loss | | 12 | | | dB | |
| Loss of Signal – Assert | P _A | | | 27.5 -31 | μW, OMA dBm avg | 5 |
| Loss of Signal - De-Assert | P _D | | | 31 -30.5 | μW, OMA dBm avg | 5 |
| Loss of Signal - Hysteresis | P _D -P _A | 0.5 | | | dB | |

Notes:

- 50/125 μm and 62.5/125 μm fiber. An OMA of 49 μW is approximately equal to an average power of -15 dBm with an Extinction Ratio of 9 dB.
- 50/125 μm and 62.5/125 μm fiber. An OMA of 31 μW is approximately equal to an average power of -17 dBm with an Extinction Ratio of 9 dB.
- 2.125 Gb/s Stressed receiver vertical eye closure penalty (ISI) min is 1.26 dB for 50 μm fiber and 2.03 dB for 62.5 μm fiber. Stressed receiver DCD component min (at TX) is 40 ps.
- 1.0625 Gb/s Stressed receiver vertical eye closure penalty (ISI) min is 0.96 dB for 50 μm fiber and 2.18 dB for 62.5 μm fiber. Stressed receiver DCD component min (at TX) is 80 ps.
- These average power values are specified with an Extinction Ratio of 9 dB. The loss of signal circuitry responds to valid 8B/10B encoded peak to peak input optical power, not average power.
- Input Optical Modulation Amplitude (commonly known as sensitivity) requires a valid 8B/10B encoded input.

Transceiver Timing Characteristics

TC = -10 °C to +85 °C, V_{CC}T, V_{CC}R = 3.3 V ± 10%

| Parameter | Symbol | Minimum | Maximum | Unit | Notes |
|---|---------------------------|---------|---------|------|-------|
| TX_DISABLE Assert Time | t _{off} | | 10 | μs | 1 |
| TX_DISABLE Negate Time | t _{on} | | 1 | ms | 2 |
| Time to initialize, Including reset of TX_FAULT | t _{init} | | 300 | ms | 3 |
| TX_FAULT Assert Time | t _{fault} | | 100 | μs | 4 |
| TX_DISABLE to Reset | t _{reset} | 10 | | μs | 5 |
| RX_LOS Assert Time | t _{loss_on} | | 100 | μs | 6 |
| RX_LOS De-assert Time | t _{loss_off} | | 100 | μs | 7 |
| Serial ID Clock Rate | f _{serial_clock} | | 100 | kHz | 8 |

Notes:

1. Time from rising edge of TX_DISABLE to when the optical output falls below 10% of nominal.
2. Time from falling edge of TX_DISABLE to when the modulated optical output rises above 90% of nominal.
3. From power on or negation of TX_FAULT using TX_DISABLE.
4. Time from fault to TX_FAULT on.
5. Time TX_DISABLE must be held high to reset TX_FAULT.
6. Time from RX_LOS transition to RX_LOS assert per Figure 4.
7. Time from non-RX_LOS transition to RX_LOS de-assert per Figure 4.
8. Contact Avago Technologies for applications requiring higher Serial ID clock rate.

Typical Transceiver Digital Diagnostic Monitor (Real Time Sense) Characteristics

TC = -10 °C to +85 °C, V_{CC}T, V_{CC}R = 3.3 V ± 10%

| Parameter | Symbol | Minimum | Units | Notes |
|---|------------------|---------|-------|-------|
| Received Modulated Optical Input Power Accuracy (OMA) | P _R | ± 3.0 | dB | 4 |
| Transmitted Average Optical Output Power Accuracy | P _T | ± 3.0 | dB | 3 |
| Transmitter Laser Dc Bias Current Accuracy | I _{INT} | ± 10 | % | |
| Transceiver Internal Temperature Accuracy | T _{INT} | ± 3.0 | °C | 1 |
| Transceiver Internal Supply Voltage Accuracy | V _{INT} | ± 0.1 | V | 2 |

Notes:

1. Temperature is measured internal to the transceiver.
2. Voltage is measured internal to the transceiver.
3. Coupled into 50/125 μm multimode fiber. Valid from -10 to 0 dBm avg.
4. Coupled from 50/125 μm multimode fiber. Valid from 49 to 800 μW OMA.



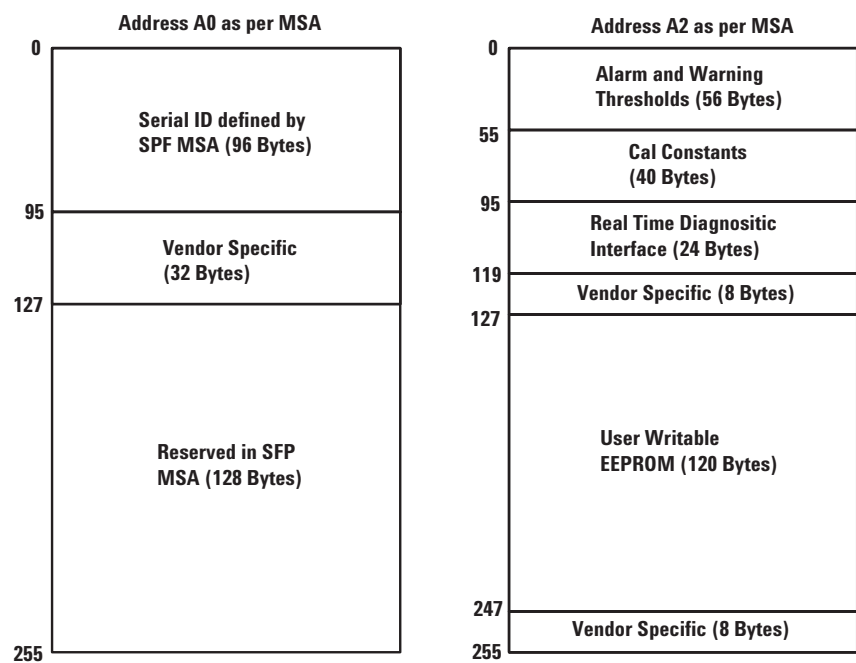



Figure 4. Memory Map

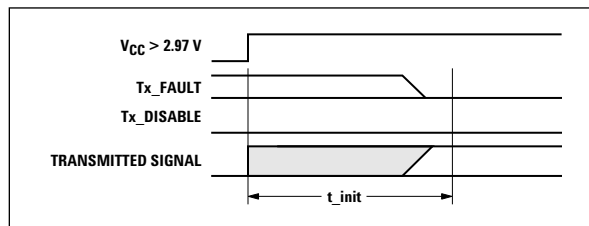


t_{init} : TX DISABLE NEGATED

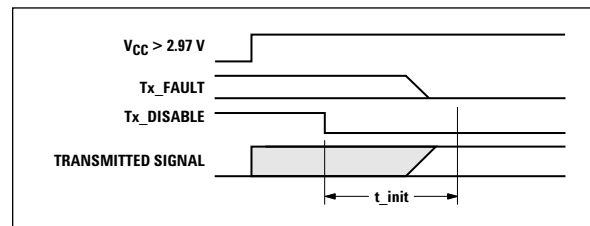


t_{init} : TX DISABLE ASSERTED

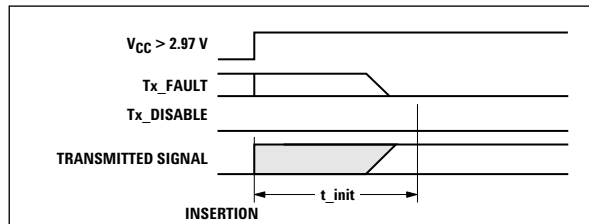


t_{init} : TX DISABLE NEGATED, MODULE HOT PLUGGED

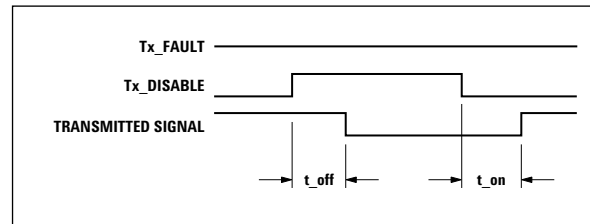


t_{off} & t_{on} : TX DISABLE ASSERTED THEN NEGATED

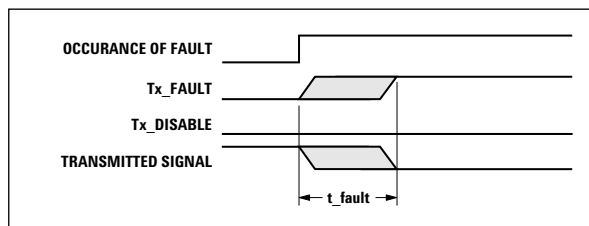


t_{fault} : TX FAULT ASSERTED, TX SIGNAL NOT RECOVERED

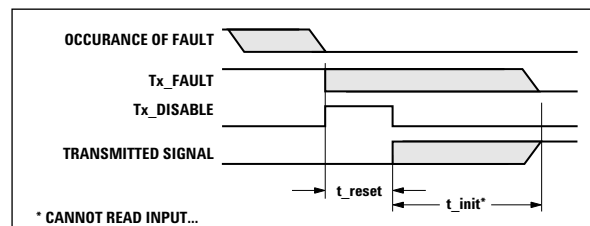

t_{reset} : TX DISABLE ASSERTED THEN NEGATED, TX SIGNAL RECOVERED

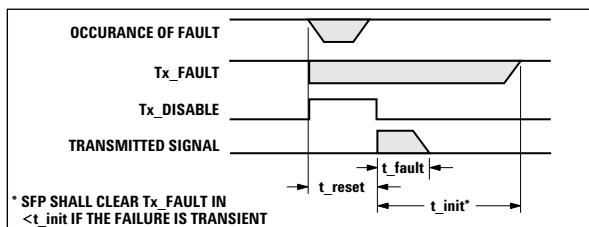

t_{fault} : TX DISABLE ASSERTED THEN NEGATED, TX SIGNAL NOT RECOVERED

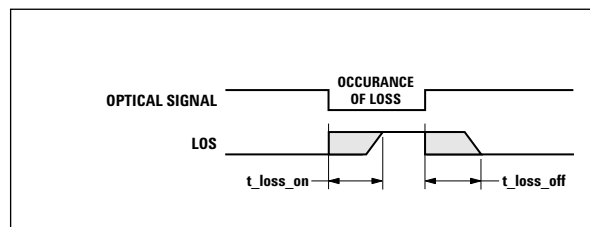

$t_{\text{loss-on}}$ & $t_{\text{loss-off}}$

Figure 5. Transceiver Timing Diagrams (Module Installed except where noted)

Table 2. EEPROM Serial ID Memory Contents – Conventional SFP Memory (Address A0h)

| Address | Hex | ASCII | Address | Hex | ASCII | Address | Hex | ASCII | Address | Hex | ASCII |
|---------|-----|-------|---------|--------|-------|---------|--------|-------|---------|-----|-------|
| 0 | 03 | | 40 | 48 | H | 68 | Note 1 | | 96 | | |
| 1 | 04 | | 41 | 46 | F | 69 | Note 1 | | 97 | | |
| 2 | 07 | | 42 | 42 | B | 70 | Note 1 | | 98 | | |
| 3 | 00 | | 43 | 52 | R | 71 | Note 1 | | 99 | | |
| 4 | 00 | | 44 | 2D | - | 72 | Note 1 | | 100 | | |
| 5 | 00 | | 45 | 35 | 5 | 73 | Note 1 | | 101 | | |
| 6 | 01 | | 46 | 37 | 7 | 74 | Note 1 | | 102 | | |
| 7 | 20 | | 47 | 4D | M | 75 | Note 1 | | 103 | | |
| 8 | 40 | | 48 | 35 | 5 | 76 | Note 1 | | 104 | | |
| 9 | 0C | | 49 | 41 | A | 77 | Note 1 | | 105 | | |
| 10 | 05 | | 50 | 50 | P | 78 | Note 1 | | 106 | | |
| 11 | 01 | | 51 | 20 | | 79 | Note 1 | | 107 | | |
| 12 | 15 | | 52 | 20 | | 80 | Note 1 | | 108 | | |
| 13 | 00 | | 53 | 20 | | 81 | Note 1 | | 109 | | |
| 14 | 00 | | 54 | 20 | | 82 | Note 1 | | 110 | | |
| 15 | 00 | | 55 | 20 | | 83 | Note 1 | | 111 | | |
| 16 | 1E | | 56 | 20 | | 84 | Note 2 | | 112 | | |
| 17 | 0F | | 57 | 20 | | 85 | Note 2 | | 113 | | |
| 18 | 00 | | 58 | 20 | | 86 | Note 2 | | 114 | | |
| 19 | 00 | | 59 | 20 | | 87 | Note 2 | | 115 | | |
| 20 | 41 | A | 60 | 03 | | 88 | Note 2 | | 116 | | |
| 21 | 47 | G | 61 | 52 | | 89 | Note 2 | | 117 | | |
| 22 | 49 | I | 62 | 00 | | 90 | Note 2 | | 118 | | |
| 23 | 4C | L | 63 | Note 3 | | 91 | Note 2 | | 119 | | |
| 24 | 45 | E | 64 | 00 | | 92 | 60 | | 120 | | |
| 25 | 4E | N | 65 | 1A | | 93 | F0 | | 121 | | |
| 26 | 54 | T | 66 | 00 | | 94 | 01 | | 122 | | |
| 27 | 20 | | 67 | 00 | | 95 | Note 3 | | 123 | | |
| 28 | 20 | | | | | | | | 124 | | |
| 29 | 20 | | | | | | | | 125 | | |
| 30 | 20 | | | | | | | | 126 | | |
| 31 | 20 | | | | | | | | 127 | | |
| 32 | 20 | | | | | | | | | | |
| 33 | 20 | | | | | | | | | | |
| 34 | 20 | | | | | | | | | | |
| 35 | 20 | | | | | | | | | | |
| 36 | 00 | | | | | | | | | | |
| 37 | 00 | | | | | | | | | | |
| 38 | 30 | | | | | | | | | | |
| 39 | D3 | | | | | | | | | | |

Notes:

1. Addresses 68-83 specify the HFBR-57M5AP ASCII serial number and will vary on a per unit basis.
2. Addresses 84-91 specify the HFBR-57M5AP ASCII date code and will vary on a per date code basis.
3. Addresses 63 and 95 are check sums. Address 63 is the check sum for bytes 0–62 and address 95 is the check sum for bytes 64–94.

Table 3. Alarms and Warning Values – Enhanced Feature Set Memory (Address A2h)

| Real-Time Monitor | High Warning | | Low Warning | | High Alarm | | Low Alarm | |
|--------------------------|---------------------|-------------------|--------------------|-------------------|-------------------|-------------------|------------------|-------------------|
| | Hex | Real Value | Hex | Real Value | Hex | Real Value | Hex | Real Value |
| RX OMA | 2AF8 | 1.1 mW | 01EA | 49 μ W | FFFF | 6.55 mW | 0000 | 0 mW |
| TX | 0F8D | -4 dBm | 03E8 | -10 dBm | 1BA7 | -1.5 dBm | 01F5 | -13 dBm |
| Ibias | 109A | 8.5 mA | 03E8 | 2 mA | 1388 | 10 mA | 03E8 | 2 mA |
| Temp | 5500 | +85 °C | F600 | -10 °C | 6400 | +100 °C | D800 | -40 °C |
| V _{CC} | 8DCC | 3.63 V | 7404 | 2.97 V | 9858 | 3.9 V | 6978 | 2.7 V |

Writing to Alarm and Warning Threshold bytes (Address 0xA2, bytes 0-39):

For a complete description of the alarms and warnings values, consult MSA SFF-8472.

The default setting for the alarm and warning threshold bytes is 'non writable.' By entering a password, however, the alarm and warning threshold bytes can be made writable to the customer, enabling customization to suit system needs. The password consists of writing the following hex data to bytes 123-126 on page 0xA2: 123 = 0x47, 124 = 0x4F, 125 = 2D, 126 = 0x41. Alarm and warning threshold bytes are volatile memory; upon power cycles, alarm and warning threshold bytes will revert back to initial factory preset values.

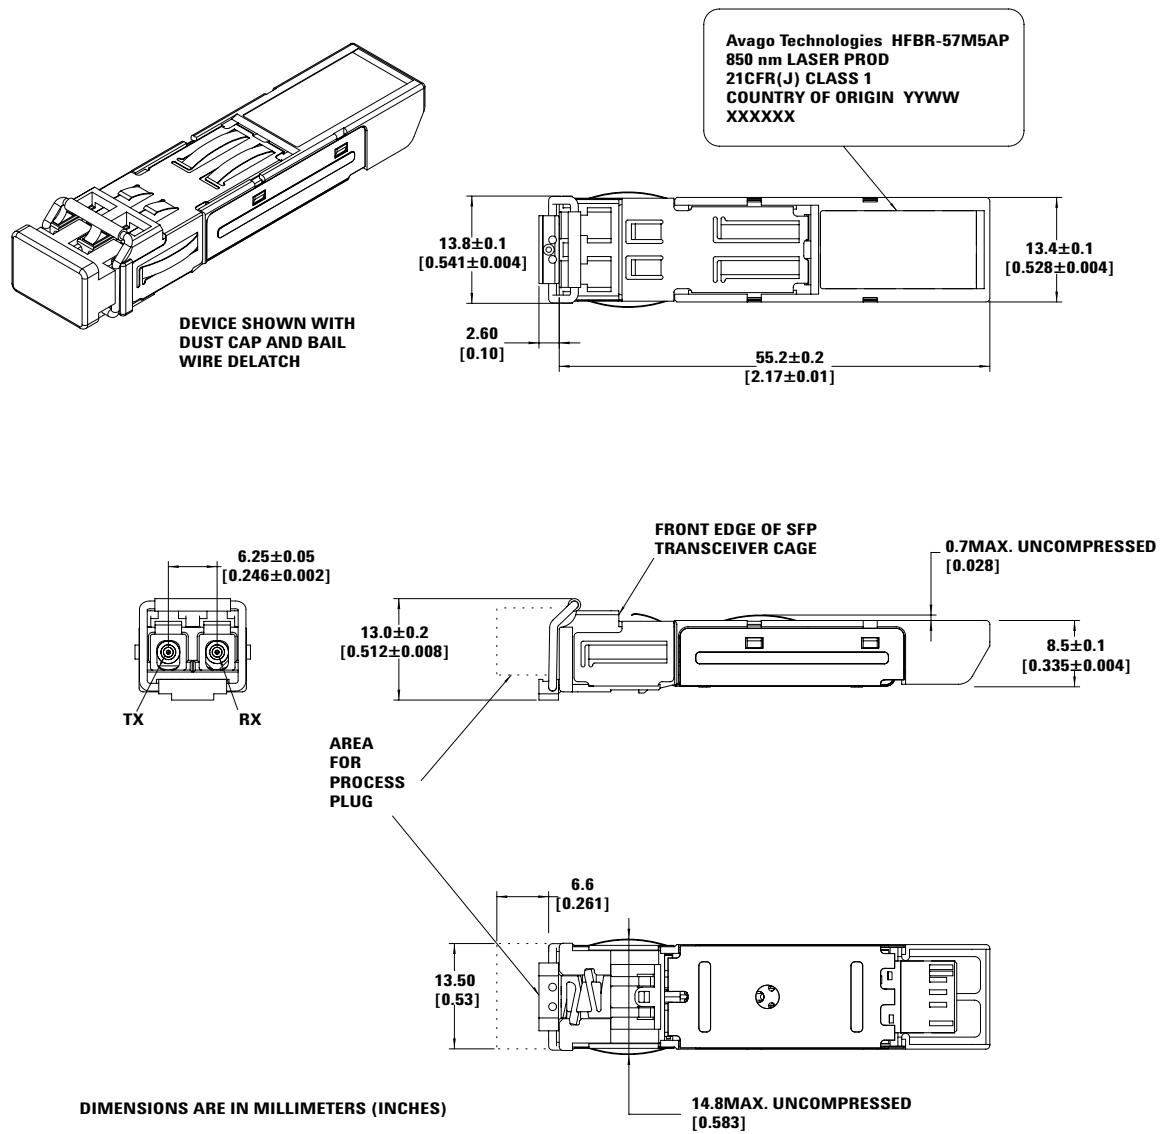


Figure 6a. Drawing of SFP Transceiver


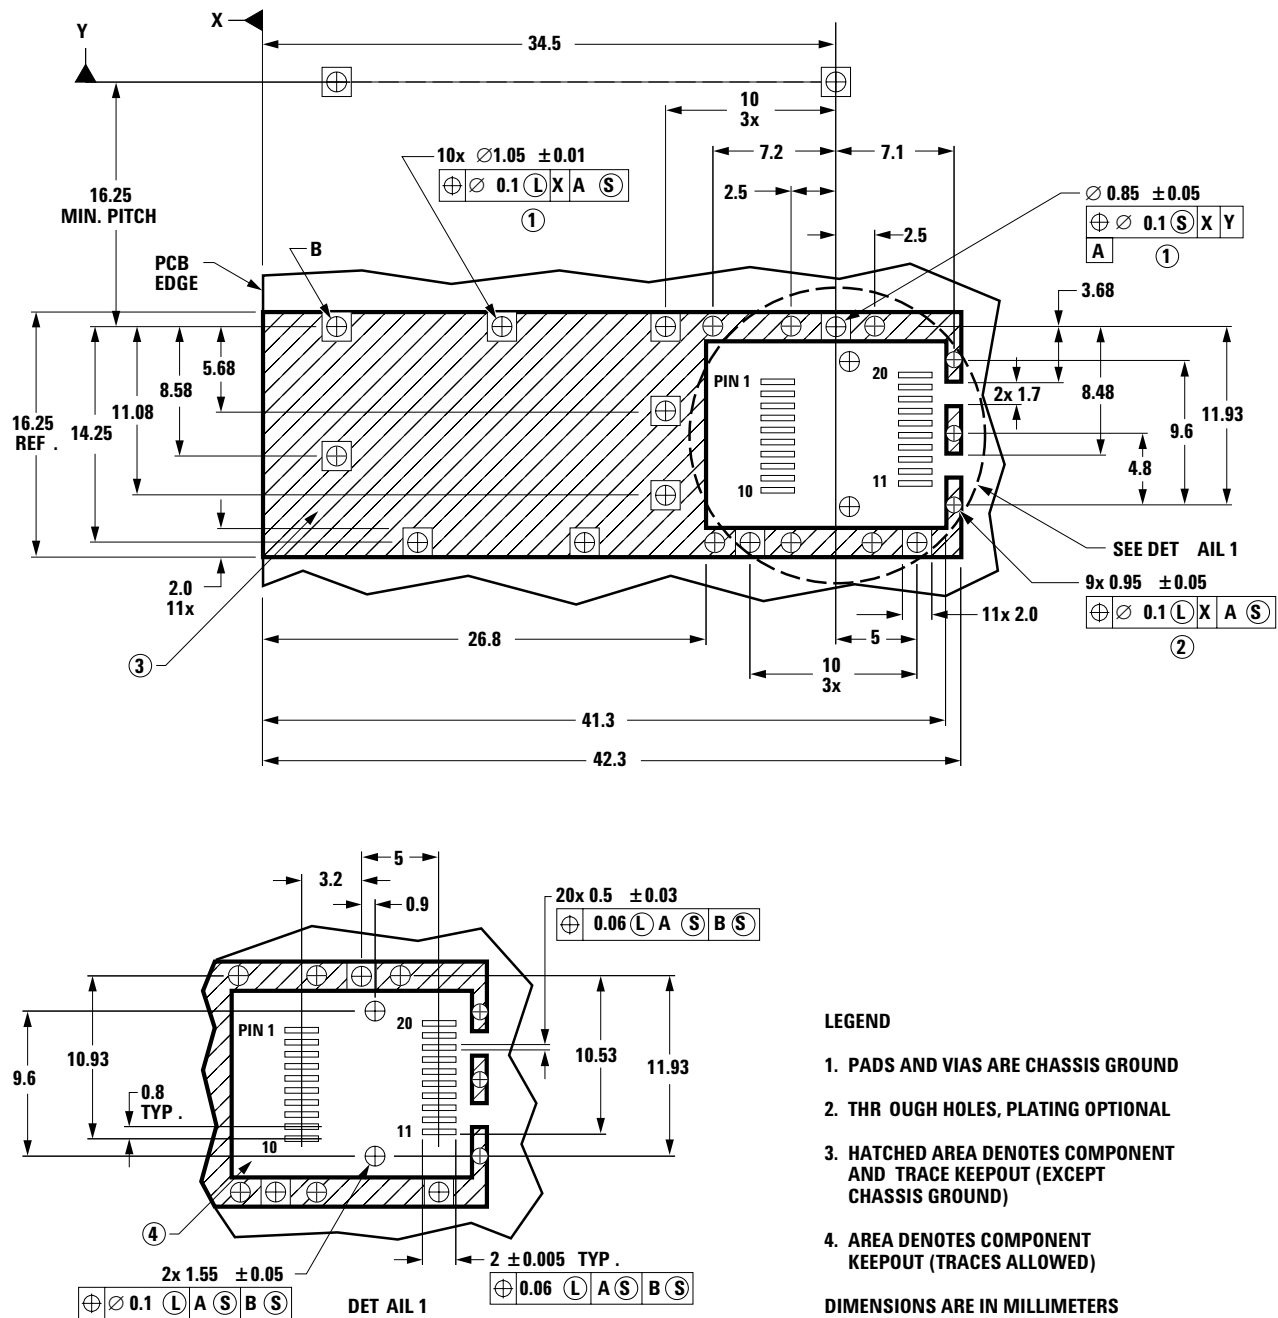


Figure 6b. SFP host board mechanical layout

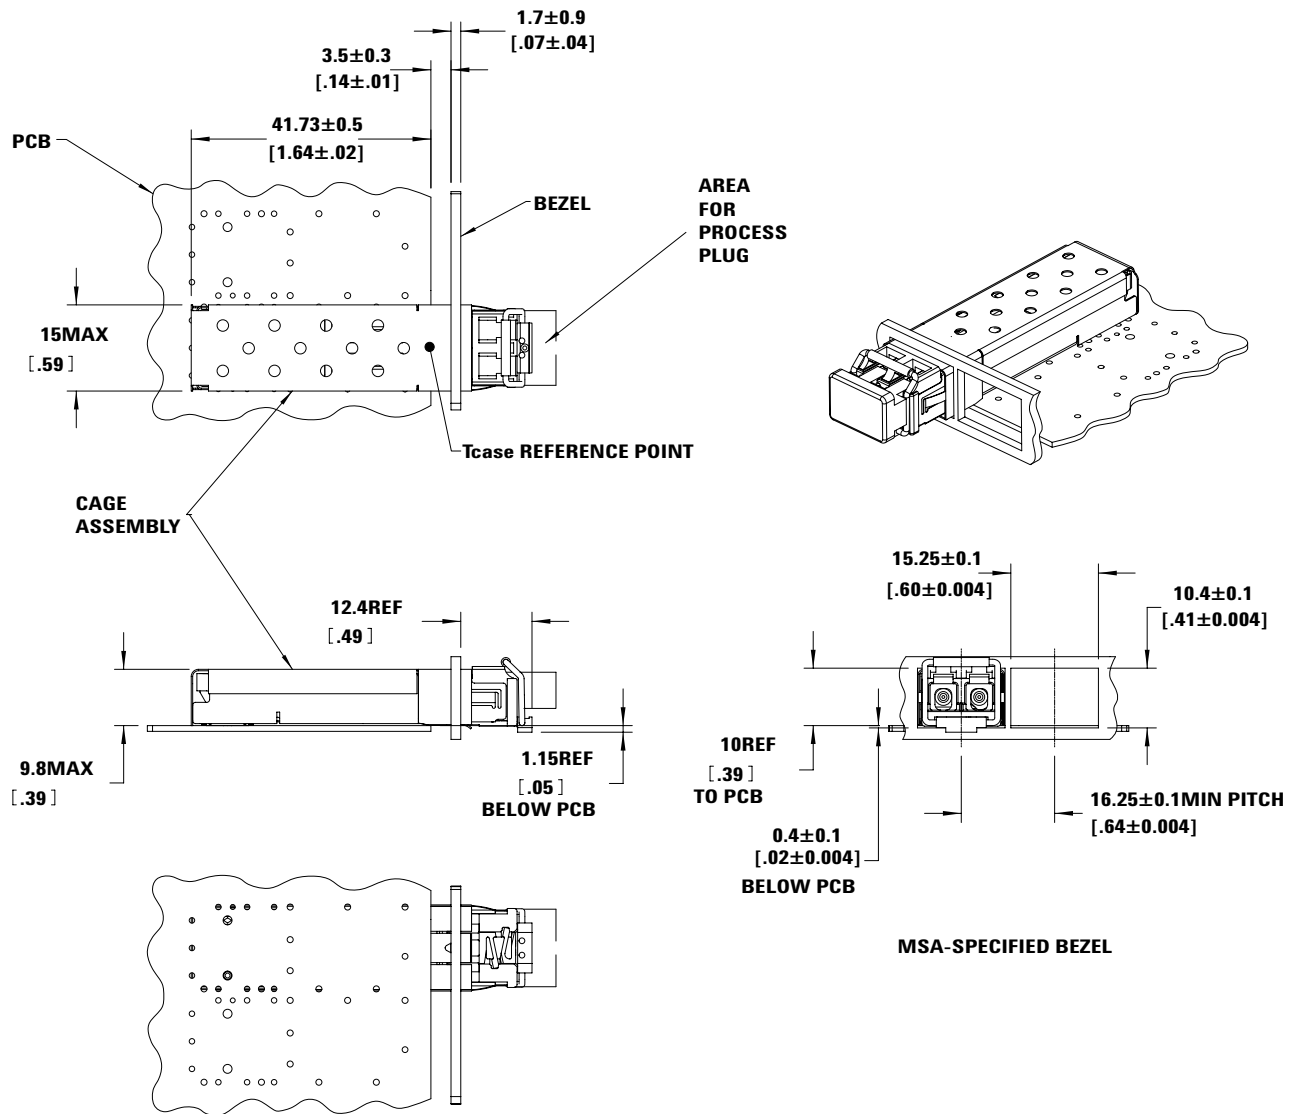

DIMENSIONS ARE IN MILLIMETERS [INCHES].

Figure 6c.

Caution

The HFBR-57M5AP contains no user serviceable parts. Tampering with or modifying the performance of the HFBR-57M5AP will result in voided product warranty. It may also result in improper operation of the HFBR-57M5AP circuitry, and possible overstress of the laser source. Device degradation or product failure may result. Operating above the recommended absolute maximum conditions may be considered an act of modifying or manufacturing a laser product. The person(s) performing such an act is required by law to recertify and reidentify the laser product under the provisions of U.S. 21 CFR (Subchapter J) and the TUV.

Ordering Information

Please contact your local field sales engineer or one of Avago Technologies franchised distributors for ordering information. For technical information, please visit Avago Technologies' web page at www.avagotech.com or contact Avago Technologies.

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries.
Data subject to change. Copyright © 2006 Avago Technologies Pte. All rights reserved.
5989-3886EN - July 7, 2006

