

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION DEC. 2005.
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
C		ECR-05-017969	14DEC05	JMS	FWK

- NOTES:**
- ▲ PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ▲ 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ▲ Au PLATING
 - ▲ Ni PLATING
 - ▲ THIS ITEM MUST BE WHITE
- 6 ELECTRICAL CHARACTERISTICS**
- FREQUENCY RANGE: DC - 4 GHz
 - NOMINAL IMPEDANCE: 50 Ohm
 - INSULATION RESISTANCE: 5000 MOhm
 - WORKING VOLTAGE: 500 Volts RMS at Sea Level
 - DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 - CONTACT RESISTANCE:
 - CENTRE CONTACT: 1.50 mOhm Max
 - OUTER CONTACT: 0.20 mOhm Max
 - VSWR @ xGHz: N/A
 - INSERTION LOSS xdb: N/A
- 7 MECHANICAL CHARACTERISTICS**
- COUPLING RETENTION FORCE: 445N Min
 - CABLE RETENTION FORCE: N/A
 - DURABILITY: 500 Cycles Min
- 8 ENVIRONMENTAL CHARACTERISTICS**
- OPERATING TEMPERATURE: -65 to +165 DegC

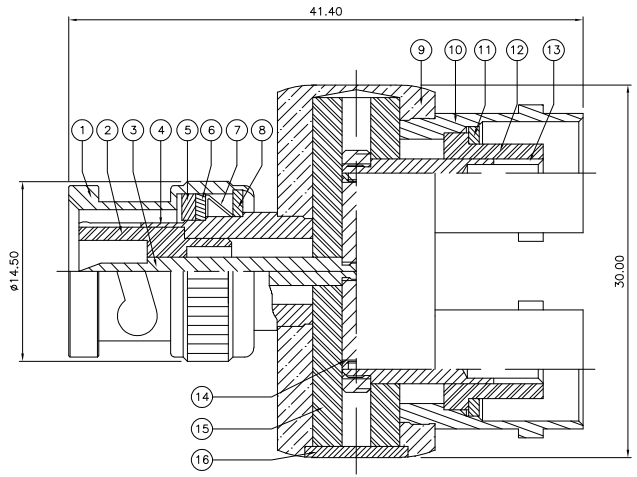

QTY	UNIT	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS	CAP	16
1	1	PTFE	INSULATION	15
1	1	BRASS	CONTACT 3	14
2	2	SRASS	CONTACT 2	13
2	2	PTFE	INSULATION	12
2	2	BRASS	SLEEVE	11
2	2	BRASS	BODY 3	10
1	1	BRASS	BODY 2	9
1	1	BRASS	WASHER	8
1	1	SPRING STEEL	SPRING	7
1	1	BRASS	RETAINING RING	6
1	1	SILICON RUBBER	GASKET	5
1	1	BRASS	BODY 1	4
1	1	BRASS	CONTACT 1	3
1	1	PTFE	INSULATION	2
1	1	BRASS	SHELL	1
6	-0	1	-0	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	OWN J. SANDWELL 14DEC05	14DEC05	Tyco Electronics Corporation Bideford EX39 4HE
0 PLC ± -	1 PLC ± -	CHK S. PARLOW 14DEC05	14DEC05	
2 PLC ± -	3 PLC ± -	APVD F. WHEELER-KING 14DEC05	14DEC05	NAME: BNC Y ADAPTOR P-J 50 OHM
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	APPLICATION SPEC	SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1337460 RESTRICTED TO: -
MATERIAL	FINISH	WEIGHT	CUSTOMER DRAWING	SCALE: NTS SHEET 1 OF 1 REV C