

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
AJ	00				
B		REV PER EDD 07-004710	3/2/2007	DW	KW

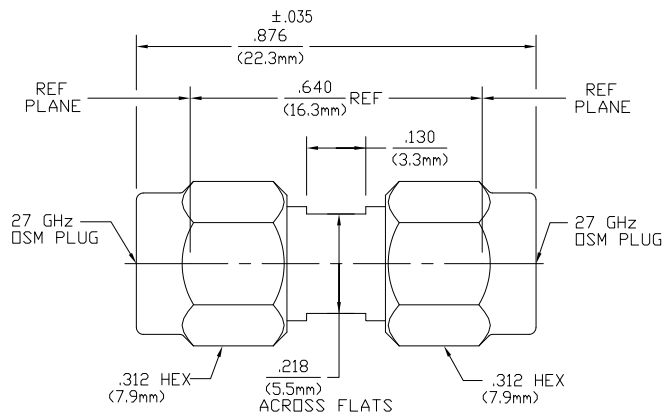

1056336-1
 PART NUMBER

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. N/A	TEMPERATURE RATING -65°C TO +165°C
Frequency Range (GHz) DC to 27.0	Recommended Mating Torque 7 to 10 in-lbs	Vibration MIL-STD-202, Method 204, Condition D.
Volt Rating (VRMS MAX) @ Sea Level 335	Mating Characteristics: Insertion (MAX Lbs) N/A	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.05 \pm .005 F(GHZ)	Withdrawal (MIN Oz) N/A	Thermal Shock MIL-STD-202, Method 107, Condition C, Except High Temp
Insertion Loss (dB MAX) $.06 \sqrt{F(GHz)}$	Force to Engage and Disengage (In-Lbs MAX) 2.0	Moisture Resistance MIL-STD-202, Method 106
RF Leakage (dB MIN) 60	Center Contact Captivation Axial (Lbs) 10.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Corona, 70,000 Ft (VRMS MIN) 250	Radial (In-Oz) 4.0	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1,500	Cable Retention Axial Force (Lbs) N/A	
Contact Resistance (Milliohms MAX) Center Contact 4.0	Torque (In-Oz) N/A	
Outer Contact 2.0	Weight (Grans) N/A	
Cable to Housing N/A		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670		
I.R.(Megohms MIN) 5,000		

COMPONENT	MATERIAL	FINISH
HOUSING COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H OR BRASS PER ASTM-B-16	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE 9-7-79	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DRAWN BY R. R.		DATE 7-10-79	OK'D BY S. SMITH	
CHECKED BY S. D.		DATE 7-11-79	NAME	
DIMENSIONS: INCHES		APPLICATION SPEC		
OTHER DIMENSIONS: MILLIMETERS		WEIGHT		
MATERIAL		FINISH		
SIZE		CAGE CODE	DRAWING NO.	RESTRICTED TO
CUSTOMER DRAWING		A2	00779	C=1056336
SCALE		10:1	SHEET	1 of 1
REV		B		

AMP 1471-9 REV 31MM2000

1056336

B

A