

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APP'D
HC	00				
	A	RELEASED ON TYCO FORMAT	24APR03	GV	DC

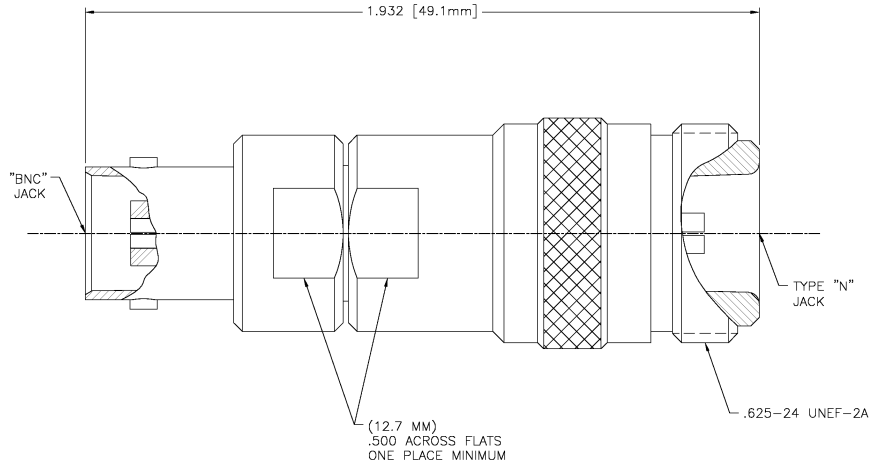

MATERIAL:
 CENTER CONDUCTOR- BERYLLIUM COPPER PER ASTM-B196, ALLOY C17300 COND H.
 OUTER CONDUCTOR- HALF HARD BRASS ASTM-B-16

TYPE "N" JACK- STAINLESS STEEL
 PER ASTM A4B4 & A5B2
 CLASS 303,

DIELECTRIC- TEFLON PER ASTM-D-1457

PLATING:
 INNER CONDUCTOR- GOLD PER MIL-G-45204
 OUTER CONDUCTOR- NICKEL PER QQ-N-290
 TYPE "N" JACK- PASSIVATED PER QQ-P-35

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: G. VICRA 24APR03	tyco Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK: J. CAMELID 24APR03	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D: J. CAMELID 24APR03	N JACK TO BNC JACK ADAPTER	
Ø	± .005	PRODUCT SPEC: 24APR03	(3080-2320-00)	
Ø	± .010	APPLICATION SPEC: -	SPEC CASE CODE	DRAWING NO
Ø	± .005	WEIGHT: -	A2 00779	1057350-1
Ø	± .005	CUSTOMER DRAWING	RESTRICTED TO	-
Ø	± .010		SCALE	5:1
Ø	± .010		SHEET	1 of 1
Ø	± .010		REV	A

AMP 1421-9 REV 31MAR2000

J:\dept1733\j.v.dies\

1057350-1

A