

DUAL OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

NJM2100 is a low supply voltage and low saturation output voltage ($\pm 2.0V_{P-P}$ at supply voltage $\pm 2.5V$) operational amplifier. It is applicable to handy type CD, radio cassette CD, and portable DAT, that are digital audio apparatus that require the 5V single supply operation and high output voltage.


■ FEATURES

- Single Supply Operation
- Operating Voltage ($\pm 1.0V \sim \pm 3.5V$)
- Low Saturation Output Voltage
- High Slew Rate ($4V/\mu s$ typ.)
- Package Outline DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology

■ PACKAGE OUTLINE




NJM2100D



NJM2100M




NJM2100V




NJM2100L

■ PIN CONFIGURATION



NJM2100D
NJM2100M
NJM2100V




NJM2100L

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT
- 3.A +INPUT
- 4.V⁻
- 5.B +INPUT
- 6.B -INPUT
- 7.B OUTPUT
- 8.V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

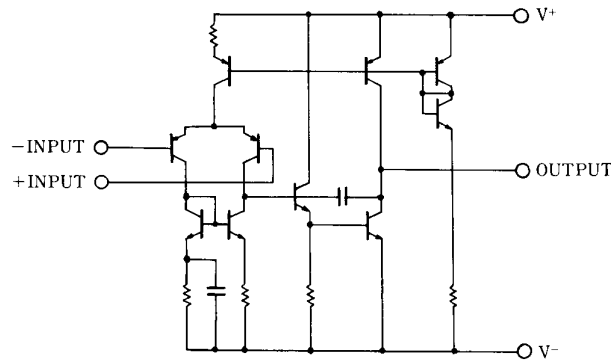

NJM2100

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-------------|---|------|
| Supply Voltage | V^+ / V^- | ± 3.5 | V |
| Differential Input Voltage | V_{ID} | ± 7 | V |
| Input Voltage | V_{IC} | ± 3.5 | V |
| Power Dissipation | P_D | (DIP8) 500 (DMP8) 300 (SSOP8) 250 (SIP8) 800 | mW |
| Operating Temperature Range | T_{opr} | -40~+85 | °C |
| Storage Temperature Range | T_{stg} | -40~+125 | °C |

■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, $V^+=5V$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|-----------|------------------------|-----------|-----------|------|------------|
| Input Offset Voltage | V_{IO} | $R_S \leq 10k\Omega$ | - | 1 | 6 | mV |
| Input Bias Current | I_{IB} | | - | 100 | 300 | nA |
| Large Signal Voltage Gain | A_V | $R_L \geq 10k\Omega$ | 60 | 80 | - | dB |
| Maximum Output Voltage Swing | V_{OM} | $R_L \geq 2.5k\Omega$ | ± 2 | ± 2.2 | - | V |
| Input Common Mode Voltage Range | V_{ICM} | | ± 1.5 | - | - | V |
| Common Mode Rejection Ratio | CMR | | 60 | 74 | - | dB |
| Supply Voltage Rejection Ratio | SVR | | 60 | 80 | - | dB |
| Operating Current | I_{CC} | $V_{IN}=0, R_L=\infty$ | - | 3.5 | 5 | mA |
| Slew Rate | SR | $A_V=1, V_{IN}=\pm 1V$ | - | 4 | - | V/ μ s |
| Gain Bandwidth Product | GB | $f=10kHz$ | - | 12 | - | MHz |

(Note1) Applied circuit voltage gain is desired to operate within the range of 3dB to 30 dB.


(Note2) Special care being required for input common mode voltage range and the oscillation due to the capacitive load when operating on voltage follower.

(Note3) Special care being required for the oscillation, yet having the gain when the supply voltage is applied at more than 5V (single supply voltage 5V).

■ TYPICAL CHARACTERISTICS


Open Loop Voltage Gain vs. Frequency

($V^+/V^- = \pm 2.5V, T_a = 25^\circ C$)

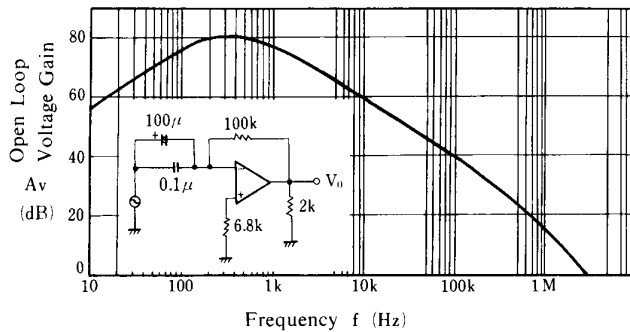


Maximum Output Voltage Swing vs. Load Resistance

($V^+/V^- = \pm 2.5V, T_a = 25^\circ C$)

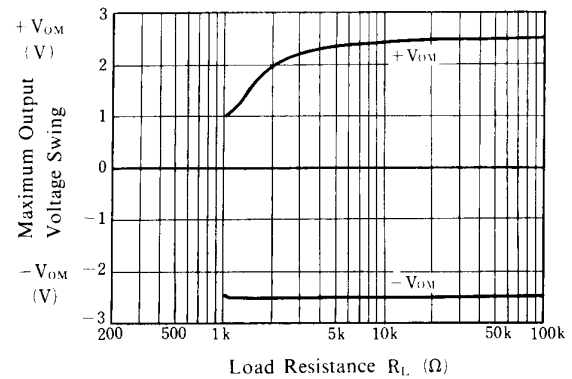


Total Harmonic Distortion vs. Output Voltage

($V^+/V^- = \pm 3V, R_L = 4k\Omega, \text{Gain} = 10\text{dB}, T_a = 25^\circ C$)

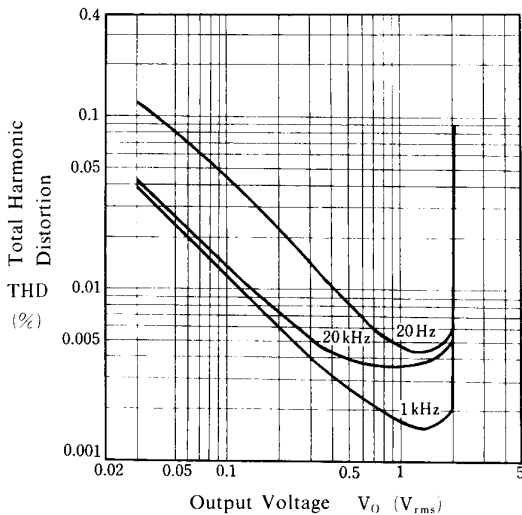


Equivalent Input Noise Voltage vs. Source Resistance

($V^+/V^- = \pm 3V, \text{JISA}, T_a = 25^\circ C$)

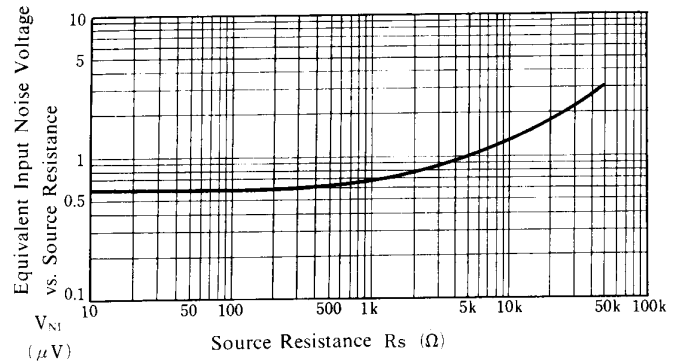


Operating Current vs. Temperature

($V^+/V^- = \pm 2.5V$)

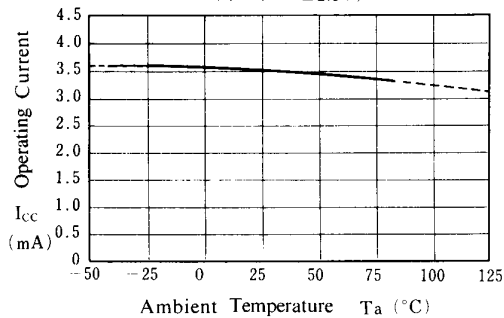

Maximum Output Voltage Swing vs. Temperature


($V^+/V^- = \pm 2.5V, R_L = 2.5k\Omega$)

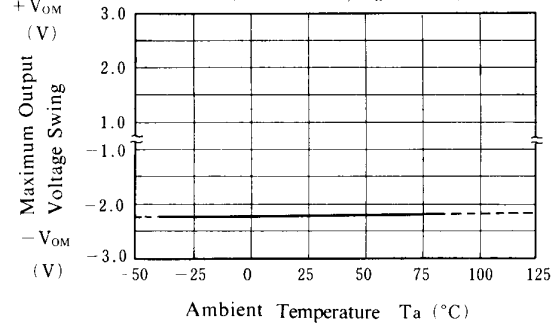

■ TYPICAL CHARACTERISTICS


Input Offset Voltage vs. Temperature

($V^+/V^- = \pm 2.5V$)

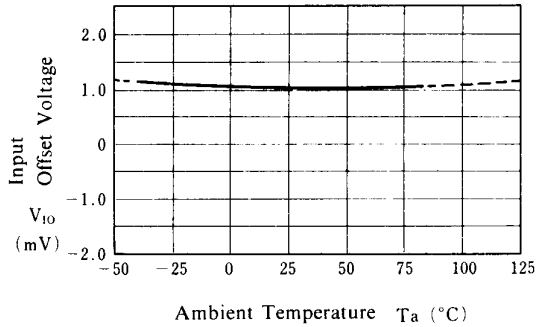


Input Bias Current vs. Temperature

($V^+/V^- = \pm 2.5V$)

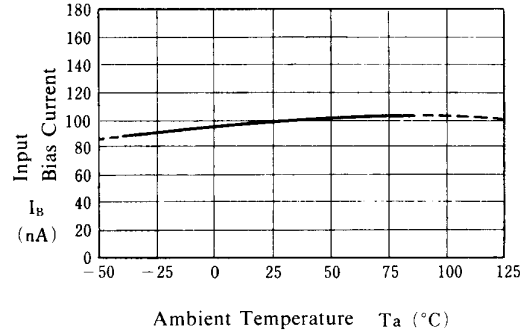


Maximum Output Voltage Swing vs. Operating Voltage

($R_L = 2.5k\Omega, T_a = 25^\circ C$)

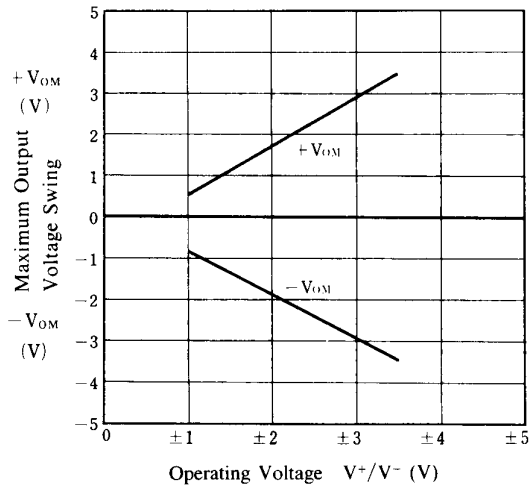


Operating Current vs. Operating Voltage

($T_a = 25^\circ C$)

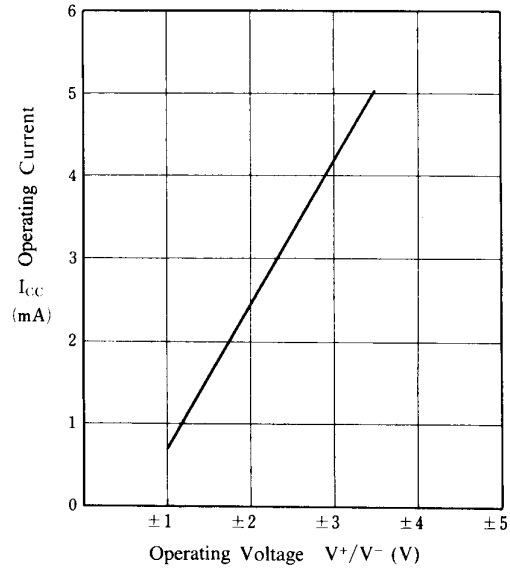


Input Offset Voltage vs. Operating Voltage

($T_a = 25^\circ C$)

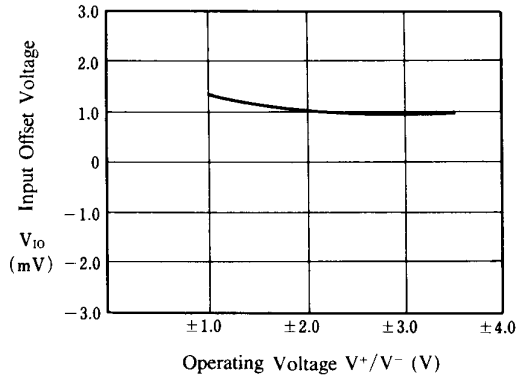

Maximum Output Voltage Swing vs. Frequency

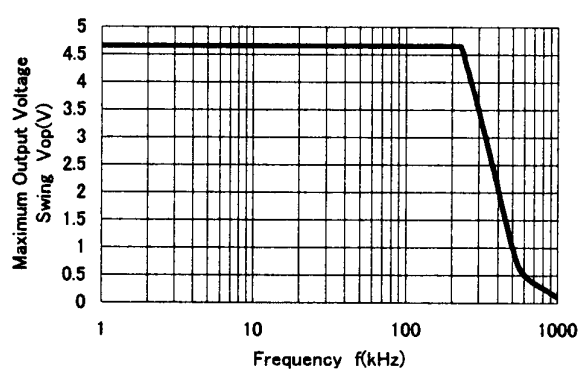

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.