


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₂	REVISED	KLE 2-20-97	<i>[Signature]</i>

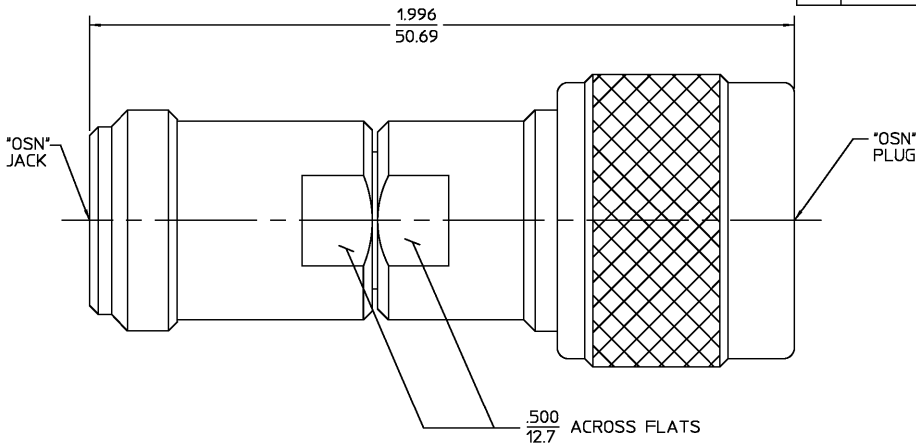

Frequency Range(GHz) DC TO 18.0
 VSWR: 1.10 + .01f(GHz)
 Insulation Resistance: 5,000
 Dielectric With Voltage(VRMS MIN): 1,500
 Contact Resistance: 4.1 Millohms Max
 Insertion Loss: $.07\sqrt{f(\text{GHz})}$
 Operating Temperature Range: -65 to +125°C

HOUSING COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
CONTACT EXT. BUSHING	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
RETAINING RING	PHOSPHOR BRONZE PER QQ-B-750, GRADE B2	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			DRAWN BY EJC CHECKED BY BWC APPD BY DN	DATE 9-10-69 9-15-69 9-15-69	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
FRAC. + 1/64	DEC. +.005	ANGLES * °	USE ASSY PROCEDURE		
These drawings and specifications are the property of M/A CDM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.			NO. AP. N/A		

TITLE			
"OSN" JACK TO "OSN" PLUG ADAPTER			
SIZE	CODE IDENT NO.		REV
B	26805	3082-0000-00	01 ₂
SCALE	4:1		SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1057374-1
 SHEET 1 OF 1 REV A