

# FAN8727

## Spindle + 4-CH Motor Drive IC

### Features

- Built-in Power Save Circuit
- Built-in Current Limit Circuit
- Built-in Thermal Shutdown Circuit (TSD)
- Built-in Hall Bias
- Built-in FG Signal Output Circuit
- Built-in Rotational Direction Detecting Circuit
- Built-in Protection Circuit For Reverse Rotation
- Built-in Short Brake Circuit
- Built-in Normal OP-AMP
- Built-in 4-CH Balanced Transformerless (BTL) Driver
- Built-in BTL MUTE Circuit (CH1-2, CH3 and CH4)
- Corresponds to 3.3V DSP

### Description

The FAN8727 is a monolithic integrated circuit suitable for a 4-CH motor driver which drives the tracking actuator, focus actuator, sled motor, loading motor and 3-phase BLDC spindle motor of the MDP/CAR-MD/CAR-NAVIGATION system.




### Typical Applications

- Mini Disk Player
- Digital Video Disk Player
- Car Mini Disk Player
- Car Navigation System

### Ordering Information

| Device  | Package      | Operating Temperature |
|---------|--------------|-----------------------|
| FAN8727 | 48-QFPH-1414 | -35°C ~ +85°C         |

## Pin Assignments

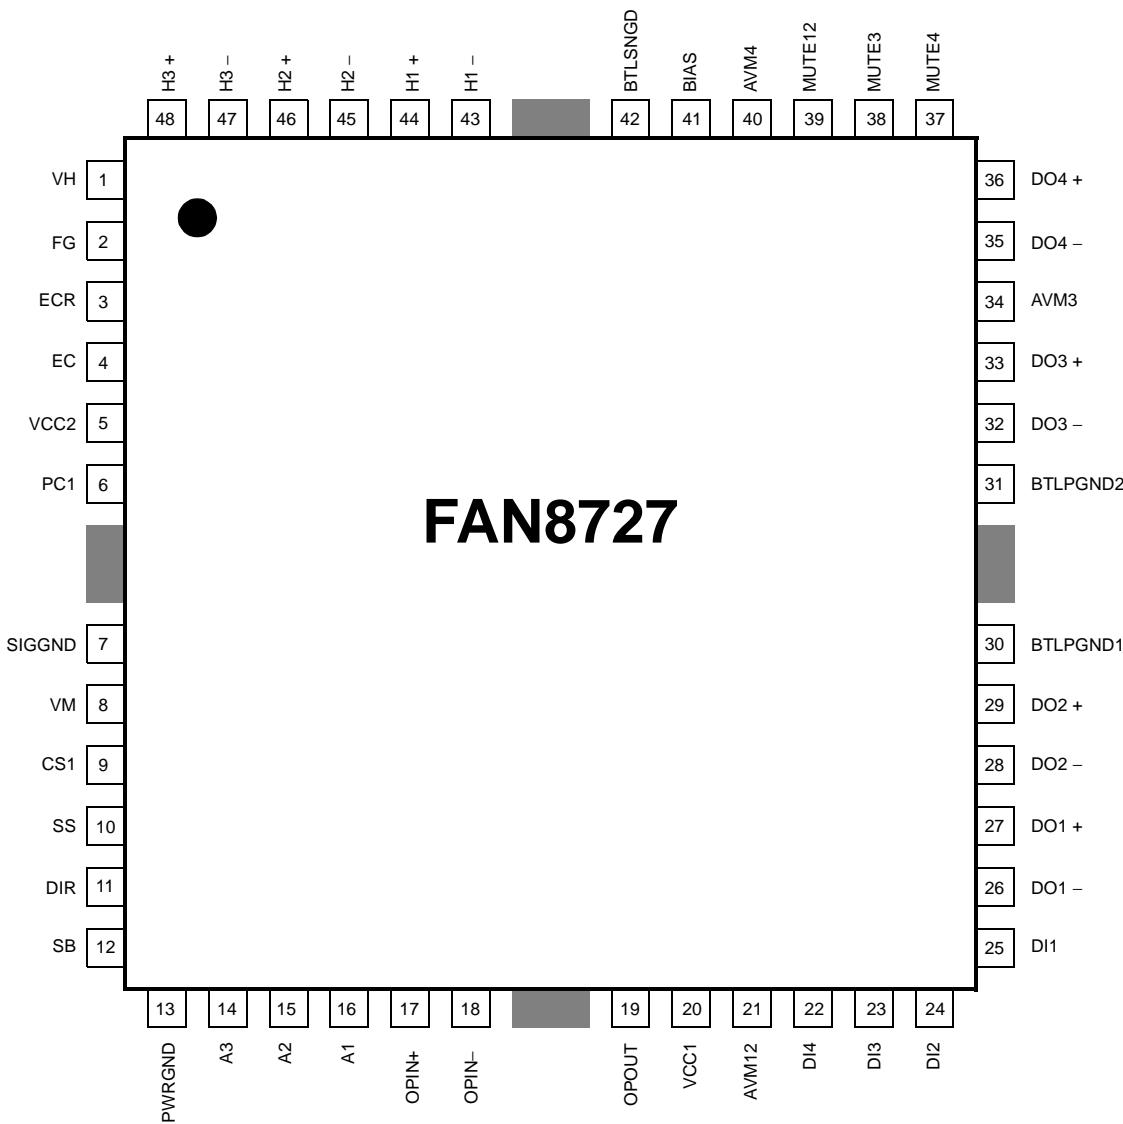


## Pin Definitions

| Pin Number | Pin Name | I/O | Pin Function Description            |
|------------|----------|-----|-------------------------------------|
| 1          | VH       | I   | Hall Bias                           |
| 2          | FG       | O   | FG Signal Output                    |
| 3          | ECR      | I   | Torque Control Reference            |
| 4          | EC       | I   | Torque Control Signal               |
| 5          | VCC2     | -   | Supply Voltage                      |
| 6          | PC1      | -   | Phase Compensation Capacitor        |
| 7          | SIGGND   | -   | Signal Ground                       |
| 8          | VM       | -   | Motor Supply Voltage                |
| 9          | CS1      | I   | Current Sensor                      |
| 10         | S/S      | I   | Start/stop                          |
| 11         | DIR      | O   | 3-Phase Rotational Direction Output |
| 12         | SB       | I   | Short Brake                         |
| 13         | PWRGND   | -   | Power Ground                        |
| 14         | A3       | O   | 3-Phase Output 3                    |
| 15         | A2       | O   | 3-Phase Output 2                    |
| 16         | A1       | O   | 3-Phase Output 1                    |
| 17         | OPIN+    | I   | OP-AMP Input (+)                    |
| 18         | OPIN-    | I   | OP-AMP Input (-)                    |
| 19         | OPOUT    | O   | OP-AMP Output                       |
| 20         | VCC1     | -   | Supply Voltage                      |
| 21         | AVM12    | -   | BTL CH1, 2 Motor Supply Voltage     |
| 22         | DI4      | I   | BTL Drive Input 4                   |
| 23         | DI3      | I   | BTL Drive Input 3                   |
| 24         | DI2      | I   | BTL Drive Input 2                   |
| 25         | DI1      | I   | BTL Drive Input 1                   |
| 26         | DO1-     | O   | BTL Drive 1 Output (-)              |
| 27         | DO1+     | O   | BTL Drive 1 Output (+)              |
| 28         | DO2-     | O   | BTL Drive 2 Output (-)              |
| 29         | DO2+     | O   | BTL Drive 2 Output (+)              |
| 30         | BTLPGND1 | -   | BTL Power Ground 1                  |
| 31         | BTLPGND2 | -   | BTL Power Ground 2                  |
| 32         | DO3-     | O   | BTL Drive 3 Output (-)              |
| 33         | DO3+     | O   | BTL Drive 3 Output (+)              |







**Pin Definitions** (Continued)

| Pin Number | Pin Name | I/O | Pin Function Description     |
|------------|----------|-----|------------------------------|
| 34         | AVM3     | -   | BTL CH3 Motor Supply Voltage |
| 35         | DO4-     | O   | BTL Drive 4 Output (-)       |
| 36         | DO4+     | O   | BTL Drive 4 Output (+)       |
| 37         | MUTE4    | I   | BTL Drive Mute CH4           |
| 38         | MUTE3    | I   | BTL Drive Mute CH3           |
| 39         | MUTE12   | I   | BTL Drive Mute CH1, 2        |
| 40         | AVM4     | -   | BTL CH4 Motor Supply Voltage |
| 41         | BIAS     | -   | BTL Bias Voltage             |
| 42         | BTLSGND  | -   | BTL Drive Signal Ground      |
| 43         | H1-      | I   | Hall1(-) Input               |
| 44         | H1+      | I   | Hall1(+) Input               |
| 45         | H2-      | I   | Hall2(-) Input               |
| 46         | H2+      | I   | Hall2(+) Input               |
| 47         | H3-      | I   | Hall3(-) Input               |
| 48         | H3+      | I   | Hall3(+) Input               |

## Internal Block Diagram

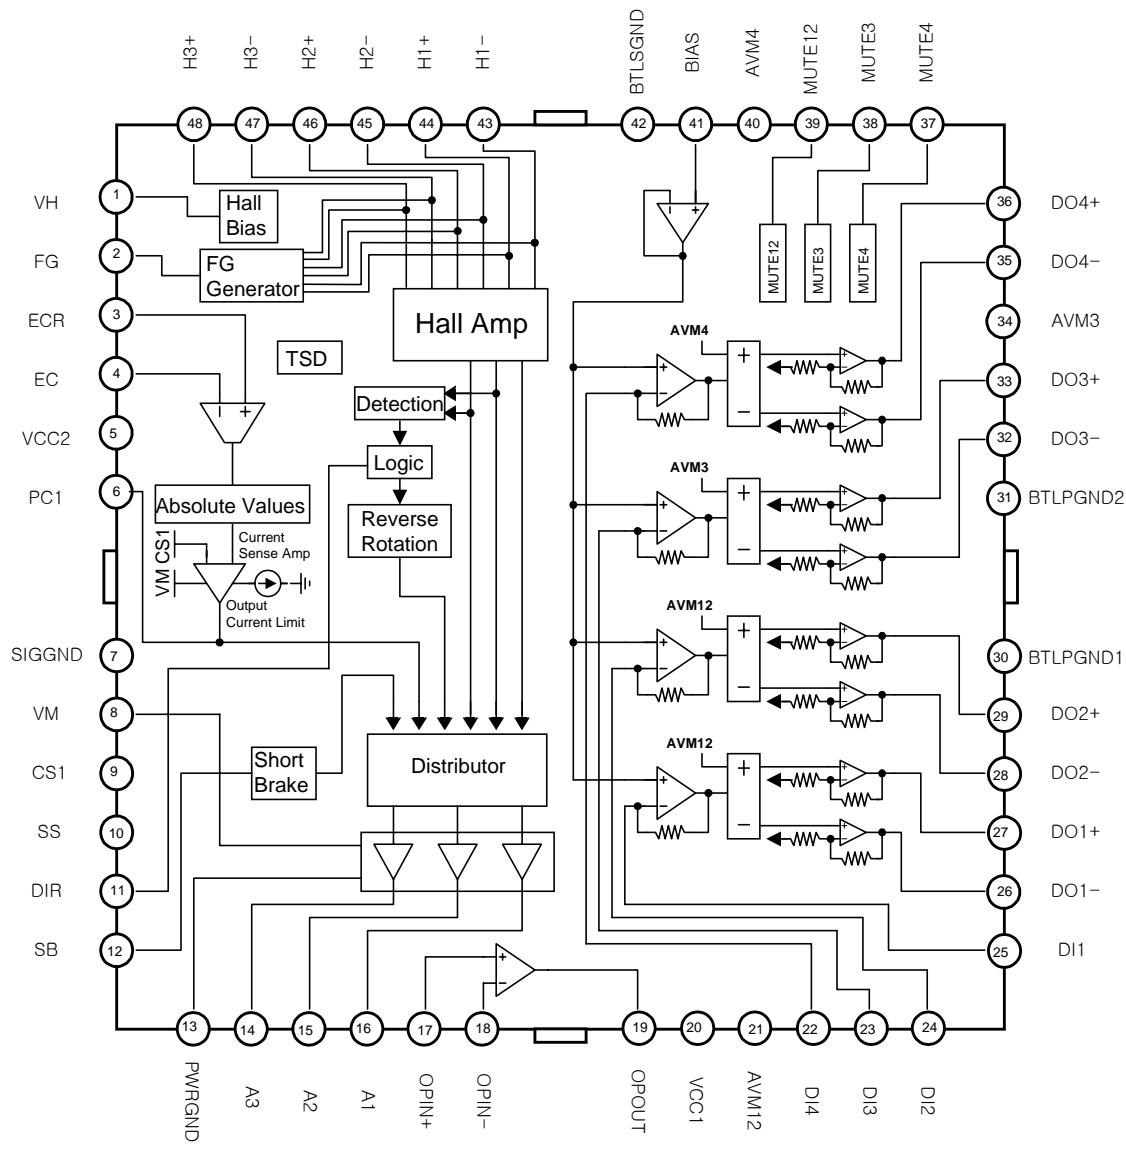





## Equivalent Circuits
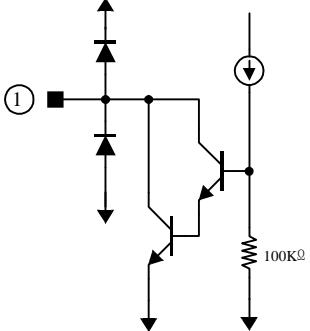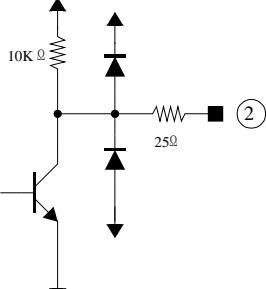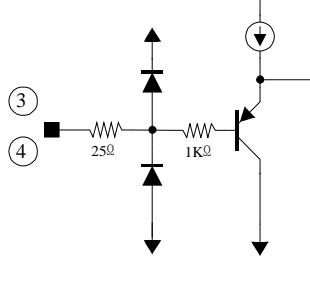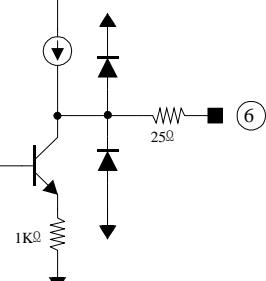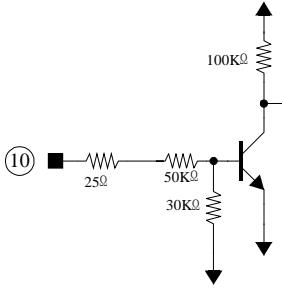
| Hall Bias   | FG Signal Output   |
|---|--|
|    |   |
| Torque Control Reference & Signal   | Phase Compensation Capacitor   |
|   |  |
| Current Detector  | Start/Stop   |
|  |  |

## Equivalent Circuits (Continued)

| 3-Phase Rotational Direction Output | Short Brake     |
|-------------------------------------|-----------------|
|                                     |                 |
| 3-Phase Output                      | OP-AMP Input    |
|                                     |                 |
| OP-AMP Output                       | BTL Drive Input |
|                                     |                 |

**Equivalent Circuits (Continued)**

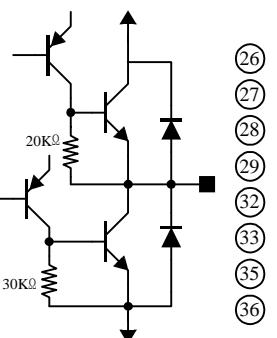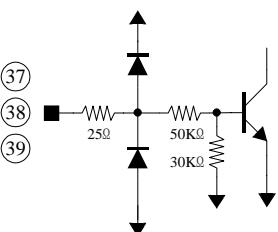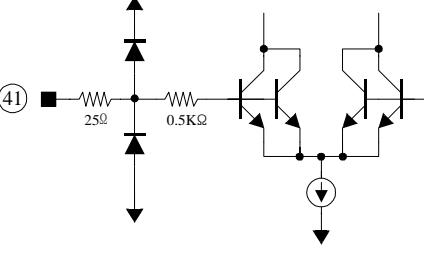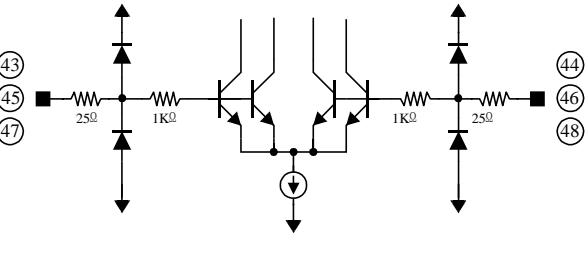
| BTL Drive Output   | BTL Drive Mute  |
|--|---|
|   |  |
| BTL Bias Voltage   | Hall Input  |
|  |  |

## Absolute Maximum Ratings ( Ta=25°C)

| Parameter                             | Symbol   | Value               | Unit |
|---------------------------------------|----------|---------------------|------|
| Supply Voltage (BTL Signal)           | VCC1max  | 15                  | V    |
| Supply Voltage (Spindle Signal)       | VCC2max  | 7                   | V    |
| Supply Voltage (Motor)                | VMmax    | 15                  | V    |
| Supply Voltage (BTL Motor)            | VMBTLmax | 15                  | V    |
| Power Dissipation                     | Pd       | 3.0 <sup>note</sup> | W    |
| Operating Temperature Range           | Topr     | -35 ~ +85           | °C   |
| Storage Temperature Range             | Tstg     | -55 ~ +150          | °C   |
| Maximum Output Current (Spindle Part) | IOMAXS   | 1.3                 | A    |
| Maximum Output Current (BTL Part)     | IOMAXB   | 1                   | A    |

**Note:**

1. When mounted on 70mm × 70 mm × 1.6mm PCB (Phenolic resin material)
2. Power dissipation is reduced 24 mW/°C for using above Ta=25°C
3. Do not exceed Pd and SOA.

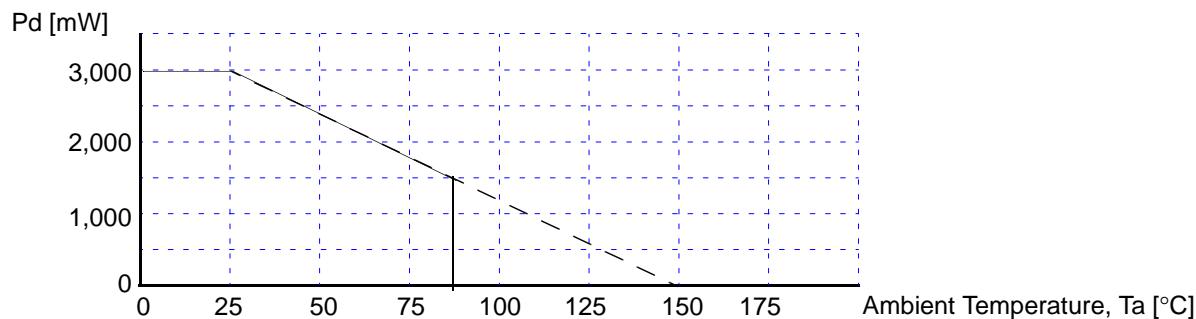

## Recommended Operating Conditions ( Ta=25°C)

| Parameter                                 | Symbol             | Min. | Typ. | Max. | Unit |
|---|--------------------|------|------|------|------|
| Operating Supply Voltage (BTL Signal)     | VCC1               | 4.5  | -    | 13.2 | V    |
| Operating Supply Voltage (Spindle Signal) | VCC2               | 4.5  | -    | 5.5  | V    |
| Operating Supply Voltage ( Spindle Motor) | VM <sup>note</sup> | 4.5  | -    | 13.2 | V    |
| Operating Supply Voltage (BTL Motor)      | VMBTL              | 4.5  | -    | VCC1 | V    |

**Note:** The VM should be turn on before the VCC2.

**Electrical Characteristics** (Ta=25°C, VCC2=5V, VM=12V)

| <b>Parameter</b>                    | <b>Symbol</b>        | <b>Condition</b>                               | <b>Min.</b> | <b>Typ.</b> | <b>Max.</b>     | <b>Unit</b> |
|-------------------------------------|----------------------|--|-------------|-------------|-----------------|-------------|
| Circuit Current 1                   | I <sub>CC 1</sub>    | Power Save=0V                                  | -           | 0.3         | 1               | mA          |
| Circuit Current 2                   | I <sub>CC2</sub>     | Power Save=5V                                  | -           | 4.5         | 6               | mA          |
| <b>START/STOP</b>                   |                      |  |             |             |                 |             |
| On Voltage Range                    | V <sub>PSON</sub>    | L-H Circuit On                                 | 2.5         | -           | -               | V           |
| Off Voltage Range                   | V <sub>PSONOFF</sub> | H-L Circuit Off                                | -           | -           | 0.5             | V           |
| <b>HALL BIAS</b>                    |                      |  |             |             |                 |             |
| Hall Bias Voltage                   | V <sub>HBIAS</sub>   | I <sub>HBIAS</sub> = 20mA                      | -           | 1.2         | 1.8             | V           |
| <b>HALL AMP</b>                     |                      |  |             |             |                 |             |
| Hall Bias Current                   | I <sub>HBIAS</sub>   | -  | -           | 1           | 5               | uA          |
| In-Phase in Voltage Range           | V <sub>HAR</sub>     | -  | 1.5         | -           | 4.0             | V           |
| Minimum in Level <sup>note</sup>    | V <sub>INH</sub>     | -  | 60          | -           | -               | mVpp        |
| <b>TORQUE CONTROL</b>               |                      |  |             |             |                 |             |
| In Voltage Range                    | E <sub>C</sub>       | -  | 0.5         | -           | 3.3             | V           |
| Offset Voltage (-) <sup>note</sup>  | E <sub>COFF-</sub>   | E <sub>CR</sub> = 2.5V                         | -100        | -50         | -20             | mV          |
| Offset Voltage (+)                  | E <sub>COFF+</sub>   | E <sub>CR</sub> = 2.5V                         | 20          | 50          | 100             | mV          |
| In Current                          | E <sub>CIN</sub>     | E <sub>C</sub> = E <sub>CR</sub> = 2.5V        | -5          | -1          | -               | uA          |
| In/Output Gain                      | G <sub>EC</sub>      | E <sub>CR</sub> = 2.5V, R <sub>CS</sub> = 0.5Ω | 0.41        | 0.51        | 0.61            | A / V       |
| <b>FG</b>                           |                      |  |             |             |                 |             |
| FG Output Voltage (H)               | V <sub>FGH</sub>     | I <sub>FG</sub> = -10uA                        | 3.0         | -           | V <sub>CC</sub> | V           |
| FG Output Voltage (L)               | V <sub>FHL</sub>     | I <sub>FG</sub> = 10uA                         | -           | -           | 0.5             | V           |
| Input Voltage Range <sup>note</sup> | V <sub>FGR</sub>     | Hn+, Hn- input D-range                         | 1.5         | -           | 4.0             | V           |
| <b>OUTPUT BLOCK</b>                 |                      |  |             |             |                 |             |
| Saturation Voltage (Upper TR)       | V <sub>OH</sub>      | I <sub>O</sub> = -300mA                        | -           | 0.9         | 1.6             | V           |
| Saturation Voltage (Lower TR)       | V <sub>OL</sub>      | I <sub>O</sub> = 300mA                         | -           | 0.2         | 0.6             | V           |
| Torque Limit Current                | I <sub>TL</sub>      | R <sub>CS</sub> = 0.5Ω                         | 560         | 700         | 840             | mA          |
| <b>DIRECTION DETECTOR</b>           |                      |  |             |             |                 |             |
| Dir Output Voltage (H)              | V <sub>DIRH</sub>    | I <sub>FG</sub> = -10uA                        | 3.0         | -           | V <sub>CC</sub> | V           |
| Dir Output Voltage (L)              | V <sub>DIRL</sub>    | I <sub>FG</sub> = 10uA                         | -           | -           | 0.5             | V           |
| <b>SHORT BRAKE</b>                  |                      |  |             |             |                 |             |
| On Voltage Range                    | V <sub>SBON</sub>    | -  | 2.5         | -           | V <sub>CC</sub> | V           |
| Off Voltage Range                   | V <sub>SBOFF</sub>   | -  | 0           | -           | 1.0             | V           |

**Note:** Guaranteed field ( No EDS / Final test )


## Electrical Characteristics (Continued)

BTL Drive Part (Ta=25°C, VCC1=12V, VMBTL=12V, RL=24Ω)

| Parameter                                   | Symbol              | Condition                        | Min. | Typ. | Max. | Unit |
|---|---------------------|----------------------------------|------|------|------|------|
| Quiescent Circuit Current                   | I <sub>CC</sub>     | -                                | -    | 18   | 25   | mA   |
| Output Offset Voltage                       | V <sub>OO</sub>     | -                                | -40  | -    | 40   | mV   |
| Maximum Output Amplitude Voltage            | V <sub>OM</sub>     | -                                | 9.5  | 10.5 | -    | V    |
| Voltage Gain                                | G <sub>VC</sub>     | V <sub>IN</sub> =0.1Vrms, 1kHz   | 10.5 | 12.0 | 13.5 | dB   |
| Ripple Rejection Ratio <sup>note</sup>      | RR                  | V <sub>IN</sub> =0.1Vrms, 120kHz | -    | 60   | -    | dB   |
| Slew Rate <sup>note</sup>                   | SR                  | 120Hz, 2Vpp                      | -    | 1.0  | -    | V/us |
| CH Mute off Voltage                         | V <sub>MOFFCH</sub> | Pin37, 38, 39 = Variation        | -    | -    | 1.0  | V    |
| CH Mute On Voltage                          | V <sub>MONCH</sub>  | Pin37, 38, 39 = Variation        | 2.5  | -    | -    | V    |
| <b>NORMAL OP- AMP</b>                       |                     |                                  |      |      |      |      |
| Input Offset Voltage                        | V <sub>OF</sub>     | -                                | -20  | -    | +20  | mV   |
| Input Bias Current                          | I <sub>B1</sub>     | -                                | -    | -    | 600  | nA   |
| High Level Output Voltage                   | V <sub>OH1</sub>    | -                                | 11   | -    | -    | V    |
| Low Level Output Voltage                    | V <sub>OL1</sub>    | -                                | -    | -    | 0.1  | V    |
| Output Sink Current                         | I <sub>SINK</sub>   | -                                | 10   | 25   | -    | mA   |
| Output Source Current                       | I <sub>SOU1</sub>   | -                                | 5    | 8    | -    | mA   |
| Open Loop Voltage Gain <sup>note</sup>      | G <sub>VO1</sub>    | f=1kHz, V <sub>IN</sub> = -75dB  | -    | 75   | -    | dB   |
| Ripple Rejection Ratio <sup>note</sup>      | RR1                 | f=120Hz, V <sub>IN</sub> = -20dB | -    | 65   | -    | dB   |
| Slew Rate <sup>note</sup>                   | SR1                 | f=120Hz, 2Vp-p                   | -    | 1    | -    | V/us |
| Common Mode Rejection Ratio <sup>note</sup> | CMRR1               | f=1kHz, V <sub>IN</sub> = -20dB  | -    | 80   | -    | dB   |

**Note:** Guaranteed field ( No EDS / Final test )

## Calculation of Gain & Torque Limit Current

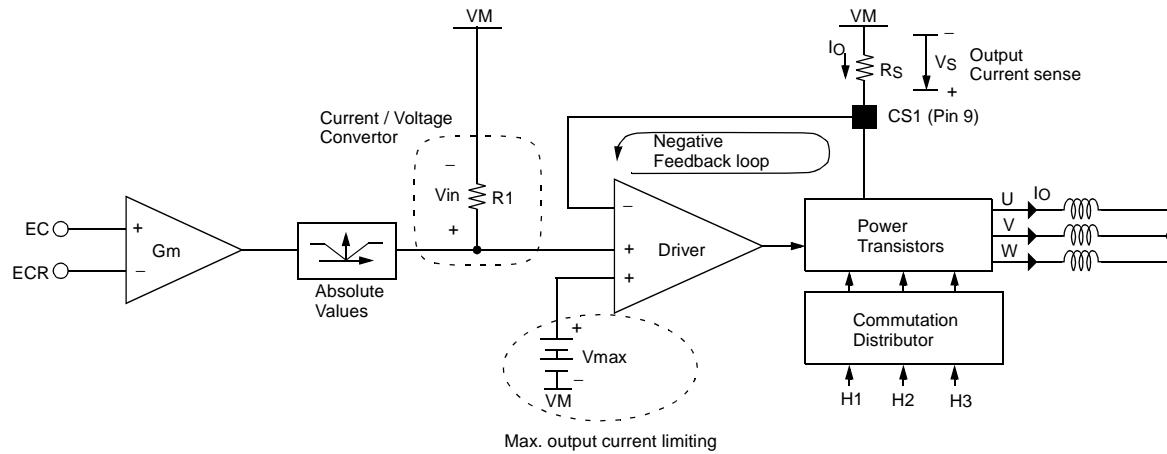

0.255 which is made from GM times R1 is fixed value within IC.

$$\text{Gain} = \frac{0.255}{R_S}$$

Vmax (see above block diagram) is setted to 350mV.

$$|I_t|[\text{mA}] = \frac{V_{\text{max}}}{R_S} = \frac{350[\text{mV}]}{R_S}$$

## Application Information

### 1. Mute Function

#### 1) Mute Control Voltage Condition

When using the mute function, the applied control voltage condition is as follows.


|                  |                      |                         |
|------------------|----------------------|-------------------------|
| MUTE ON Voltage  | 2.5[V] Above         | Mute Function Operation |
| MUTE OFF Voltage | OPEN or 0.5[V] Below | Normal Operation        |

#### 2) Separated Channel Mute Function

These pins are used for individual channel mute operation.

- When the mute pins (pin 37, 38 and 39) are OPEN or the voltage of the mute pins are below 0.5[V], the mute circuit is stopped and BTL output circuits operate normally.
- When the mute pins (pin 37, 38 and 39) are above 2.5[V], the mute circuits are activated so that the BTL output circuits will be muted.
- If the junction temperature rises above 175°C, then the thermal shutdown (TSD) circuit is activated and all the output circuits (4-CH BTL Drivers and 3-phase BLDC Driver) are muted.

### 2. 4-CH Balanced Transformerless (Btl) Driver

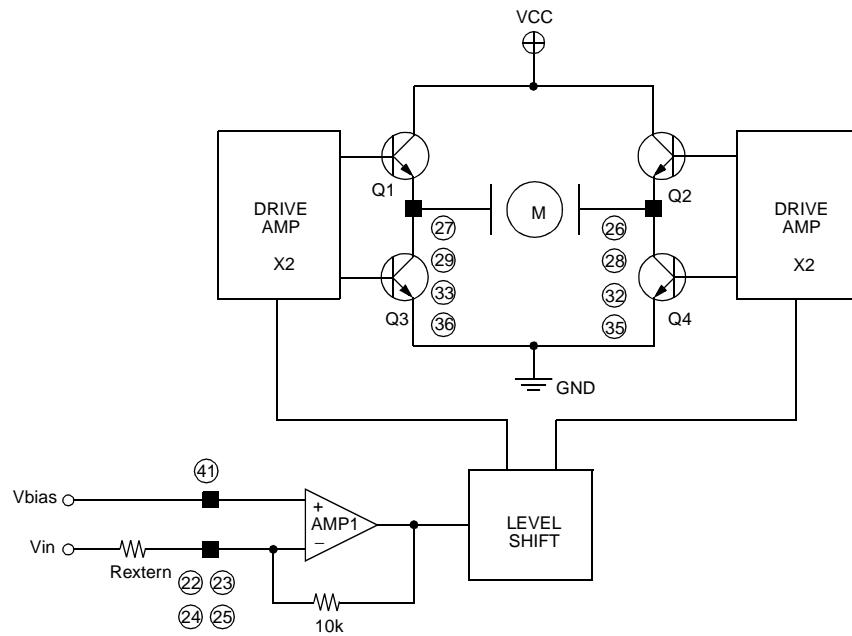


- The voltage, Vbias, is the reference voltage given by the external bias voltage of pin 41.
- The input signals, Vin, through the pins (pin 22, 23, 24 and 25) are amplified 10K/Rextern times and then fed to the level shift.
- The level shift produces the current due to the difference between the input signal (Vin) and the arbitrary reference voltage (Vbias). The current produced as  $+ \Delta I$  and  $- \Delta I$  are fed into the drive buffers.
- The drive buffer operates the power TR of the output stage according to the state of the input signal(Vin).
- The output stage is the BTL driver, and the motor (or actuator) is rotating in forward direction by operating TR Q1 and TR Q4. On the other hand, if TR Q2 and TR Q3 are operating, the motor (or actuator) is rotating in reverse direction.
- When the input signal Vin, through the pin (pin 22, 23, 24 and 25) is below the Vbias, then the motor (actuator) is in forward direction.


- When the input signal Vin, through the pin (pin 22, 23, 24 and 25) is above the Vbias, then the motor (actuator) is in reverse direction.
- If you want to change the gain, then modify the external resistor's value (Rextern)

### 3. Torque & Output Current Control

Torque Control & Output Current Control

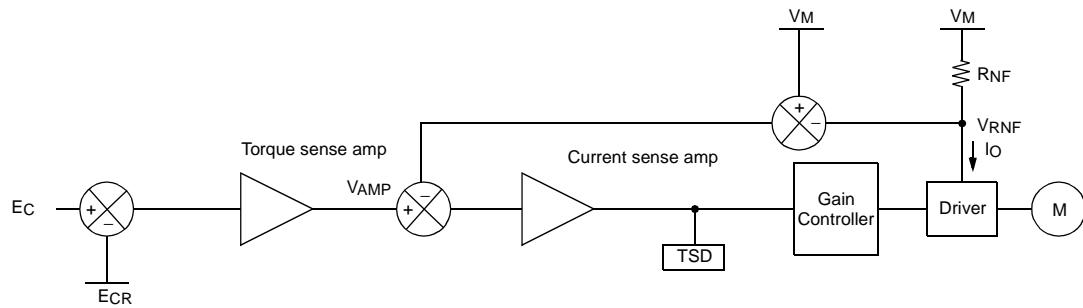


- By amplifying the voltage difference between EC and ECR from the Servo IC, the torque sense AMP produces the input (VAMP) for the current sense AMP.
- The current sense AMP produces the input for the Gain controller to allow the output current (IO) of the driver to be controlled by the input voltage (VAMP), where the output current (IO) is detected by the sense resistor (RNF) and is converted into VRNF.
- In the end, the signals of the Servo IC control the velocity of the motor by controlling the output current (IO) of the driver.
- When the junction temperature rises up to about 175°C, then the output drive circuit will be shut down.
- The range of the torque control input voltage is as shown below.

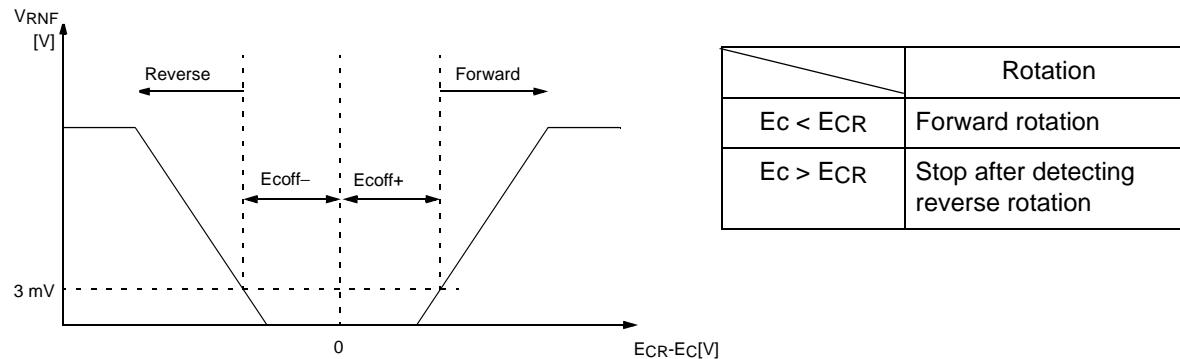

The input range (Ec) of the Torque Sense AMP is 0.5V ~ 3.3V


#### 4. Power Save Function

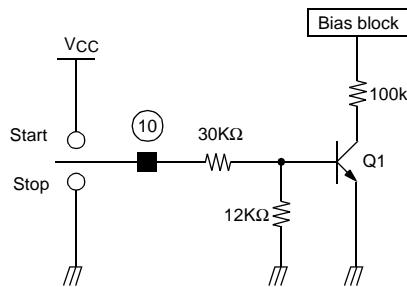

- This function block operates the power saving function.
- The power save circuit is activated by operating TR Q1.
- When the SS (Start/Stop) pin 10 is high (VCC), the TR Q1 is turned on so that the bias circuit is enabled. On the other hand, when the SS (Start/Stop) pin 10 is Open or Low (GND), the TR Q1 is turned off so that the bias circuit is disabled.
- The power save operation controlled by SS (pin 10) input conditions is as follows;

| Pin#10   | FAN8727 |
|----------|---------|
| HIGH     | START   |
| OPEN/LOW | STOP    |

#### 5. Short Brake Function

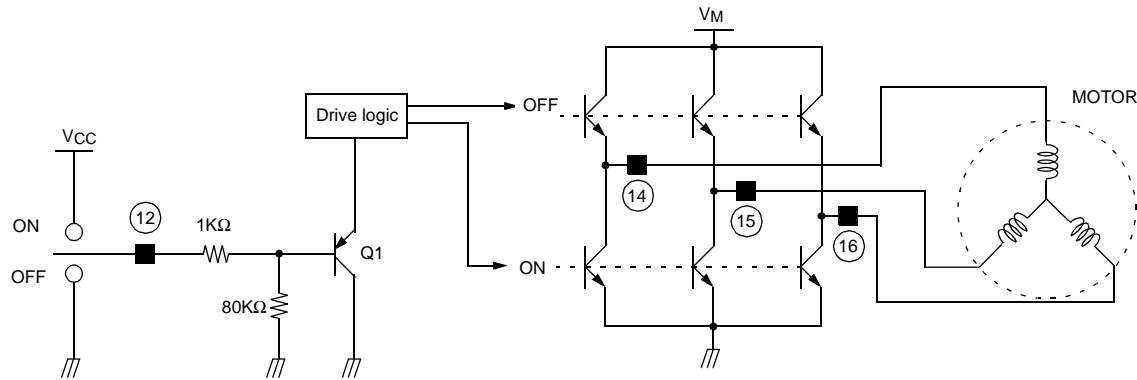

When the pick-up part moves from the inner to the outer spindle of the MD, the brake function of the reverse voltage is commonly employed to rate the rotational velocity of the spindle motor. However, if the spindle motor rotates rapidly, the brake function of the reverse voltage may produce too much heat at the drive IC.


To remove these shortcomings and to enhance efficiency, the short brake function is added to FAN8727. When the short brake function is active, all upper Power transistors are turned off and the lower Power transistors turned on, so as to reduce the rotational velocity of the motor. The short brake operation controlled by SB (pin 12), and the inputs conditions are as follows.

| Pin#12 | SHORT BRAKE |
|--------|-------------|
| HIGH   | ON          |
| LOW    | OFF         |


## 6. Thermal Shutdown (Tsd) Function

When the junction temperature rises up to about  $175^{\circ}\text{C}$ , then the output drive circuit is shut down, when the junction temperature falls off to about  $160^{\circ}\text{C}$ , the output drive circuit will be normally operated. It has the temperature hysteresis of about  $15^{\circ}\text{C}$ .


## 7. Rotational Direction Detecting Function

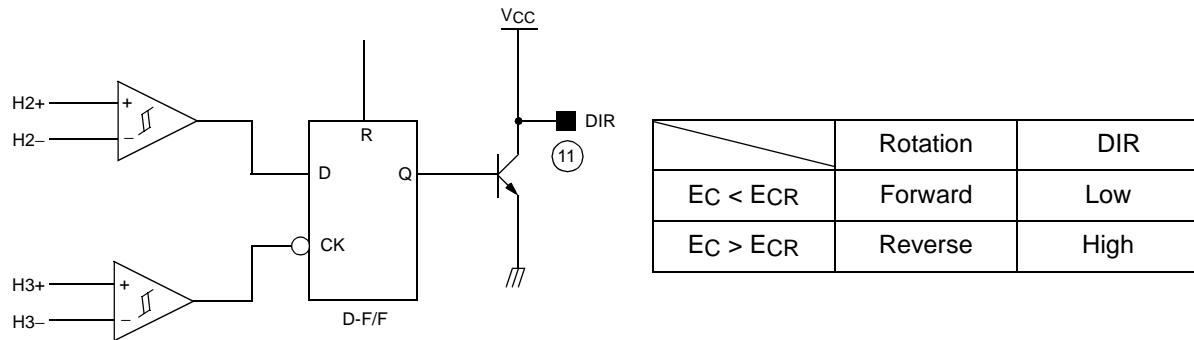

- The forward and reverse rotations of the MD are detected by the circuit, as shown in the above Table.
- The rotational direction of the MD can be learned by the output waveforms of the hall sensor and/or the driver. Let the three hall sensors be H1, H2 and H3 respectively. If the hall sensors turn on in the order,  $\text{H1} \rightarrow \text{H2} \rightarrow \text{H3}$ , of the reverse rotation, the output waveforms of the hall sensors will be as shown below.

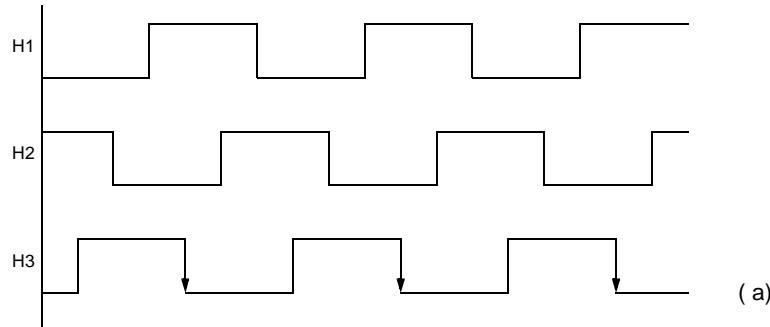


Inversely, if the hall sensors turn on in the order,  $\text{H3} \rightarrow \text{H2} \rightarrow \text{H1}$ , of the forward rotation, the output waveforms of the hall sensors will be as shown next page.

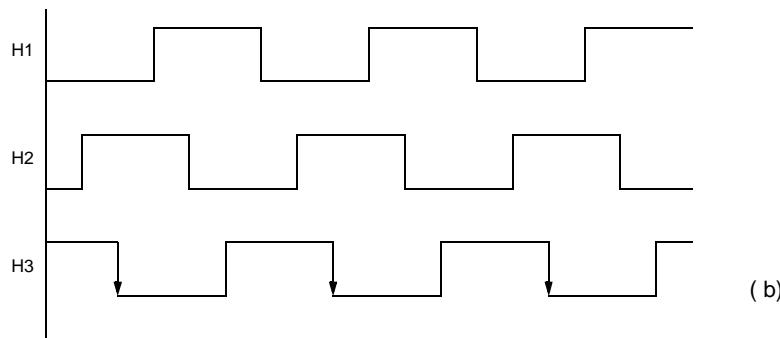

In the cases above, the value of H2 at the falling edges of H3 is Low in figure <a>, while High in figure <b>. The rotational direction detector takes advantage of this phenomenon.

## 8. Reverse Rotation Preventing Function

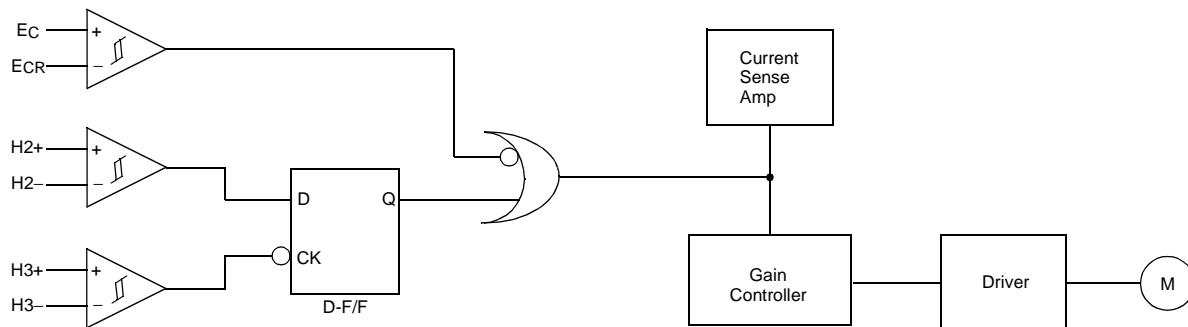


- The forward and reverse rotation of the motor are detected, as shown in the table below, by the circuit shown above. Consequently at reverse rotation, the D-F/F output Q becomes Low and cuts off the output current sense Amp, resulting in the stoppage of the Gain controller function.
- When the MD is rotating in forward direction,  $Ec > ECR$  is sometimes controlled to retard and/or stop the MD. As the controlling time of  $Ec > ECR$  gets longer, MD slows down, stops, and then rotates in the reverse direction. To prevent the MD from rotating in the reverse direction, a reverse rotation resistant function is required. Its operational principles are discussed below.

| Rotation | H2 | H3    | D-F/F | Reverse Rotation Preventer |                |
|----------|----|-------|-------|----------------------------|----------------|
|          |    |       |       | $Ec < ECR$                 | $Ec > ECR$     |
| Forward  | H  | H → L | H     | Forward                    | Brake and Stop |
| Reverse  | L  | H → L | L     | -                          | Stop           |


## 9. FG Output Function

The FG output, which detects the number of rotations of the MD, is generated by combination zero-crossing the output waveforms of the hall sensors. The FG output circuit is as shown below.

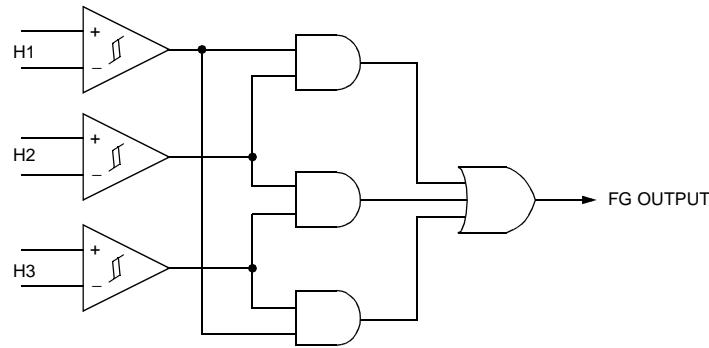


## 10. Hall Sensor Connection

External Hall sensors are used in series or parallel connection as shown below.

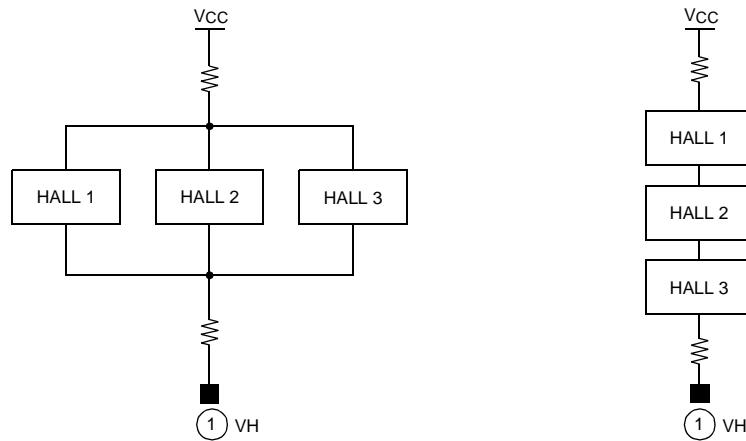


## 11. Hall Input Output Timming Chart

The 3-phase hall signal is amplified in the hall amplifiers and sent to the matrix section, where the signal is further amplified and combined. After the signal is converted to a current in the amplitude control circuit, the current is supplied to the output driver, which then provides a motor drive current. The phases of the hall input signal, output voltage, and output current are shown below.

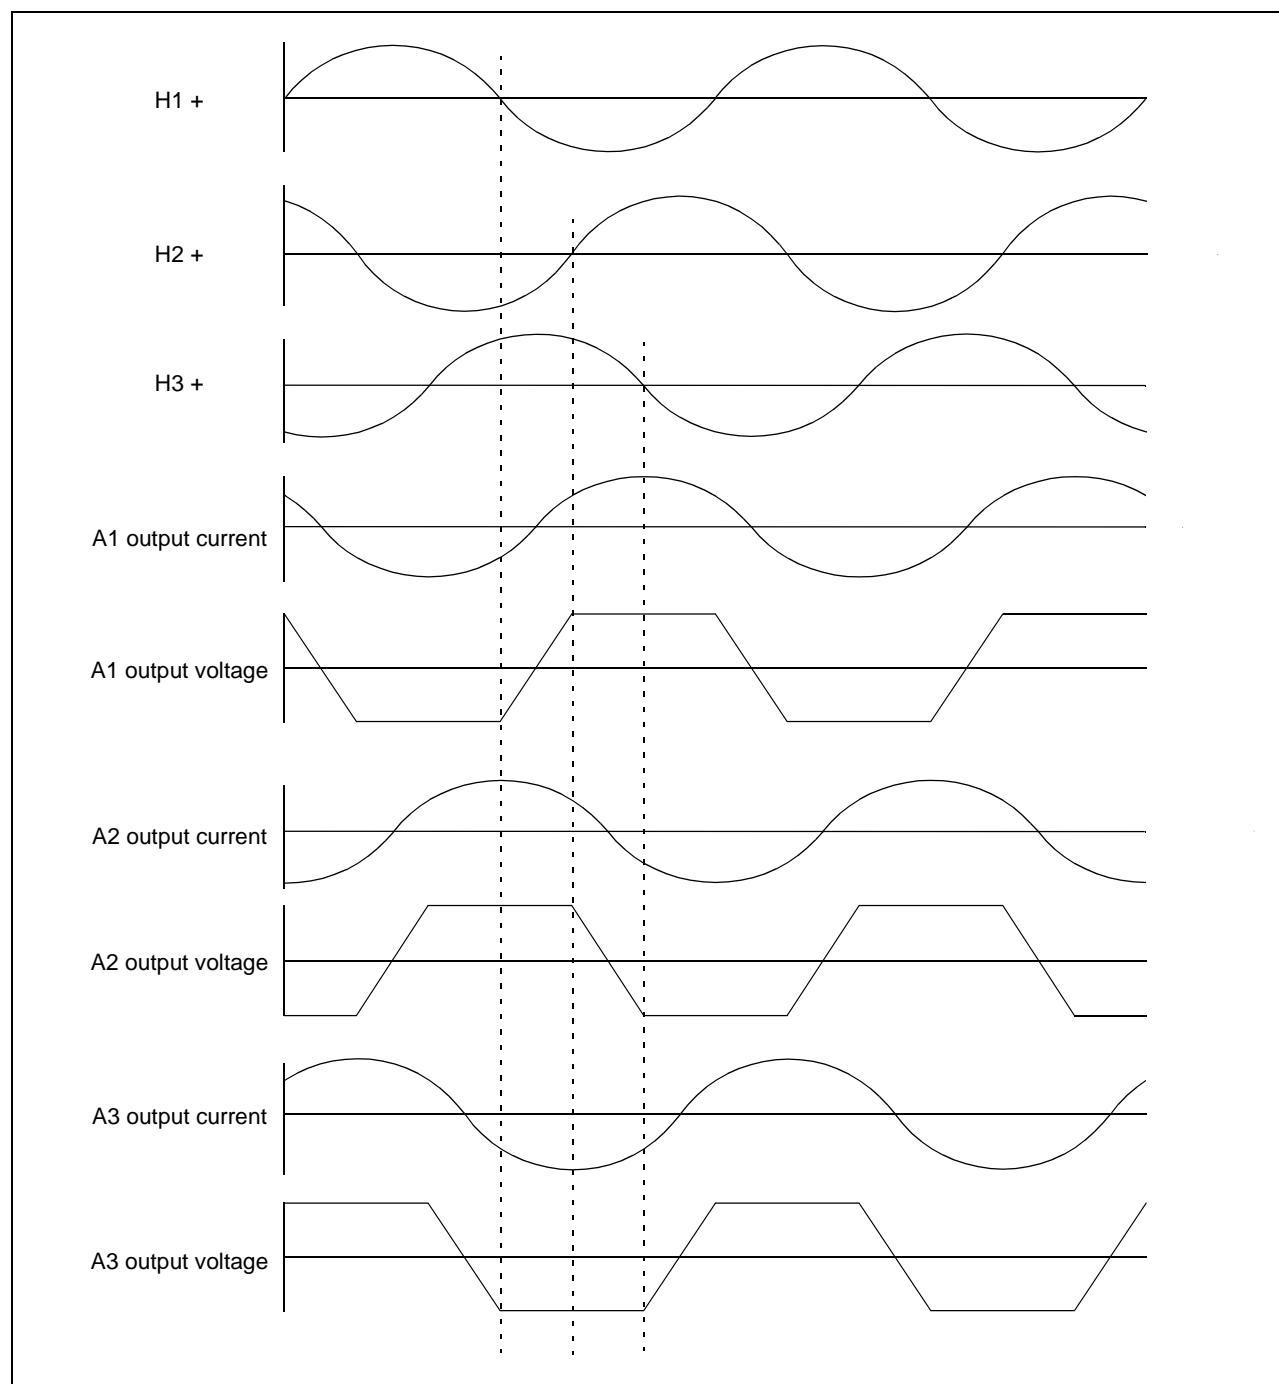


## Test Circuits 1

### BTL Drive Part

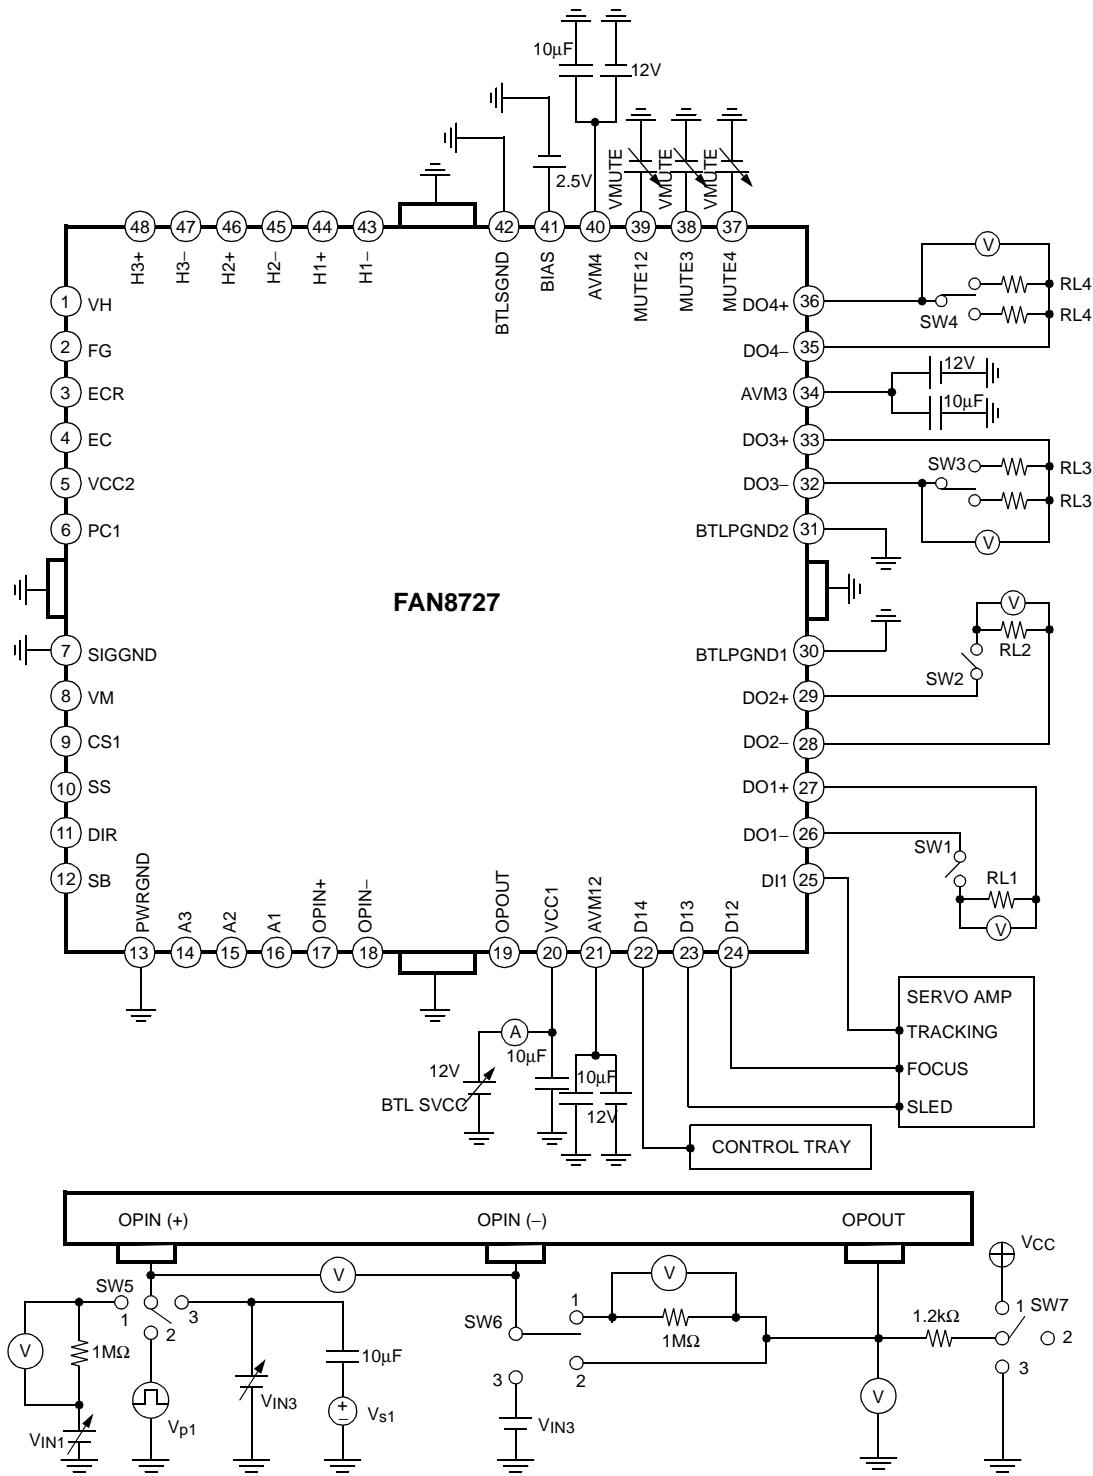


## Test Circuits 2

### Spindle Motor Drive Part

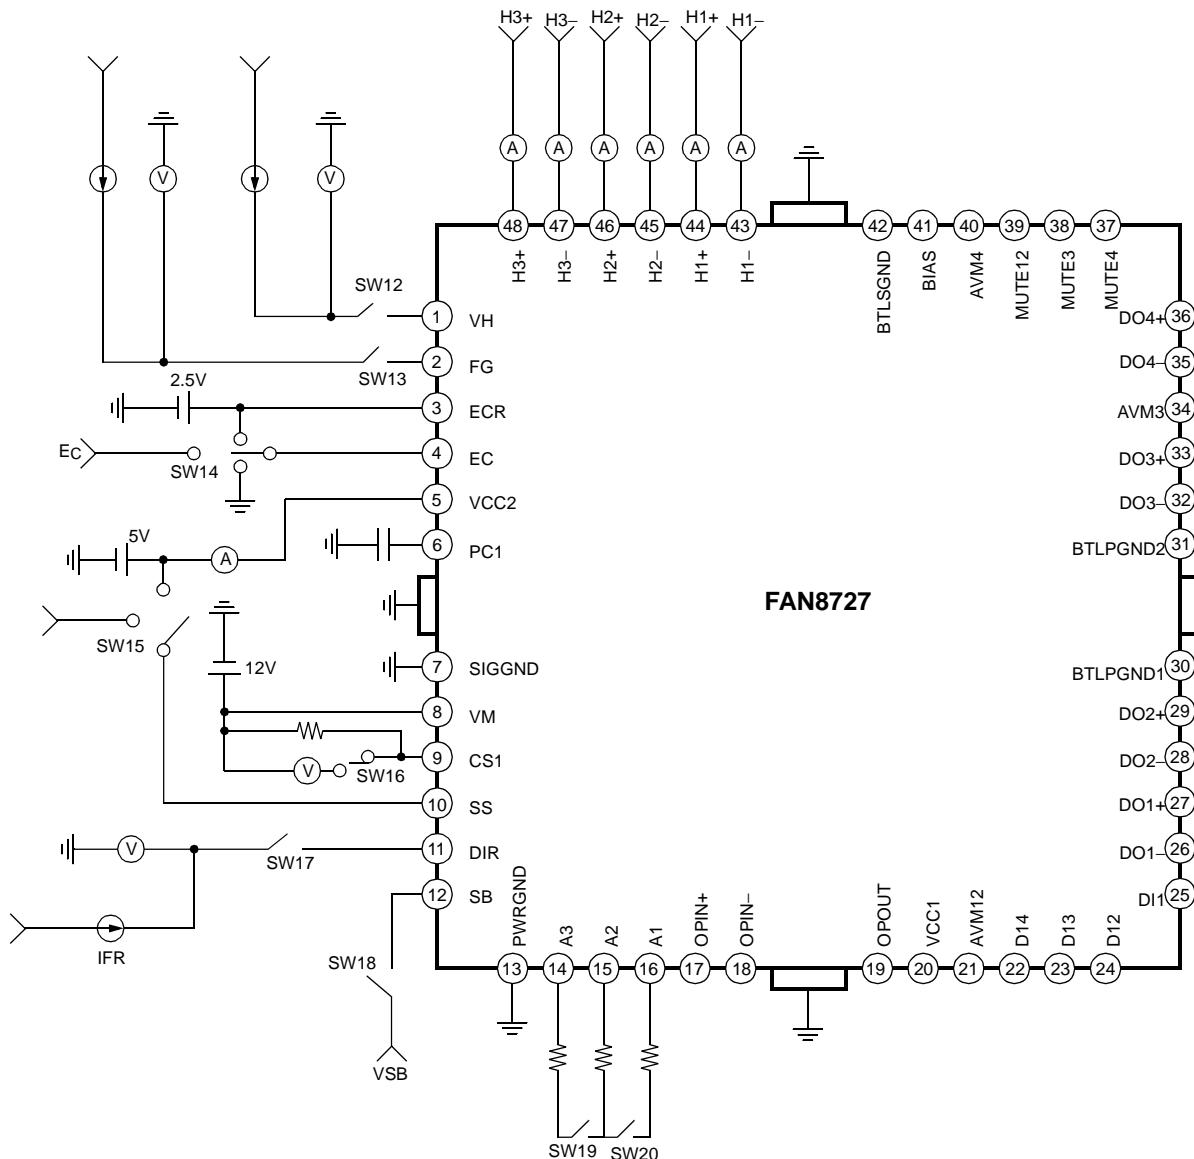

## Application Circuits

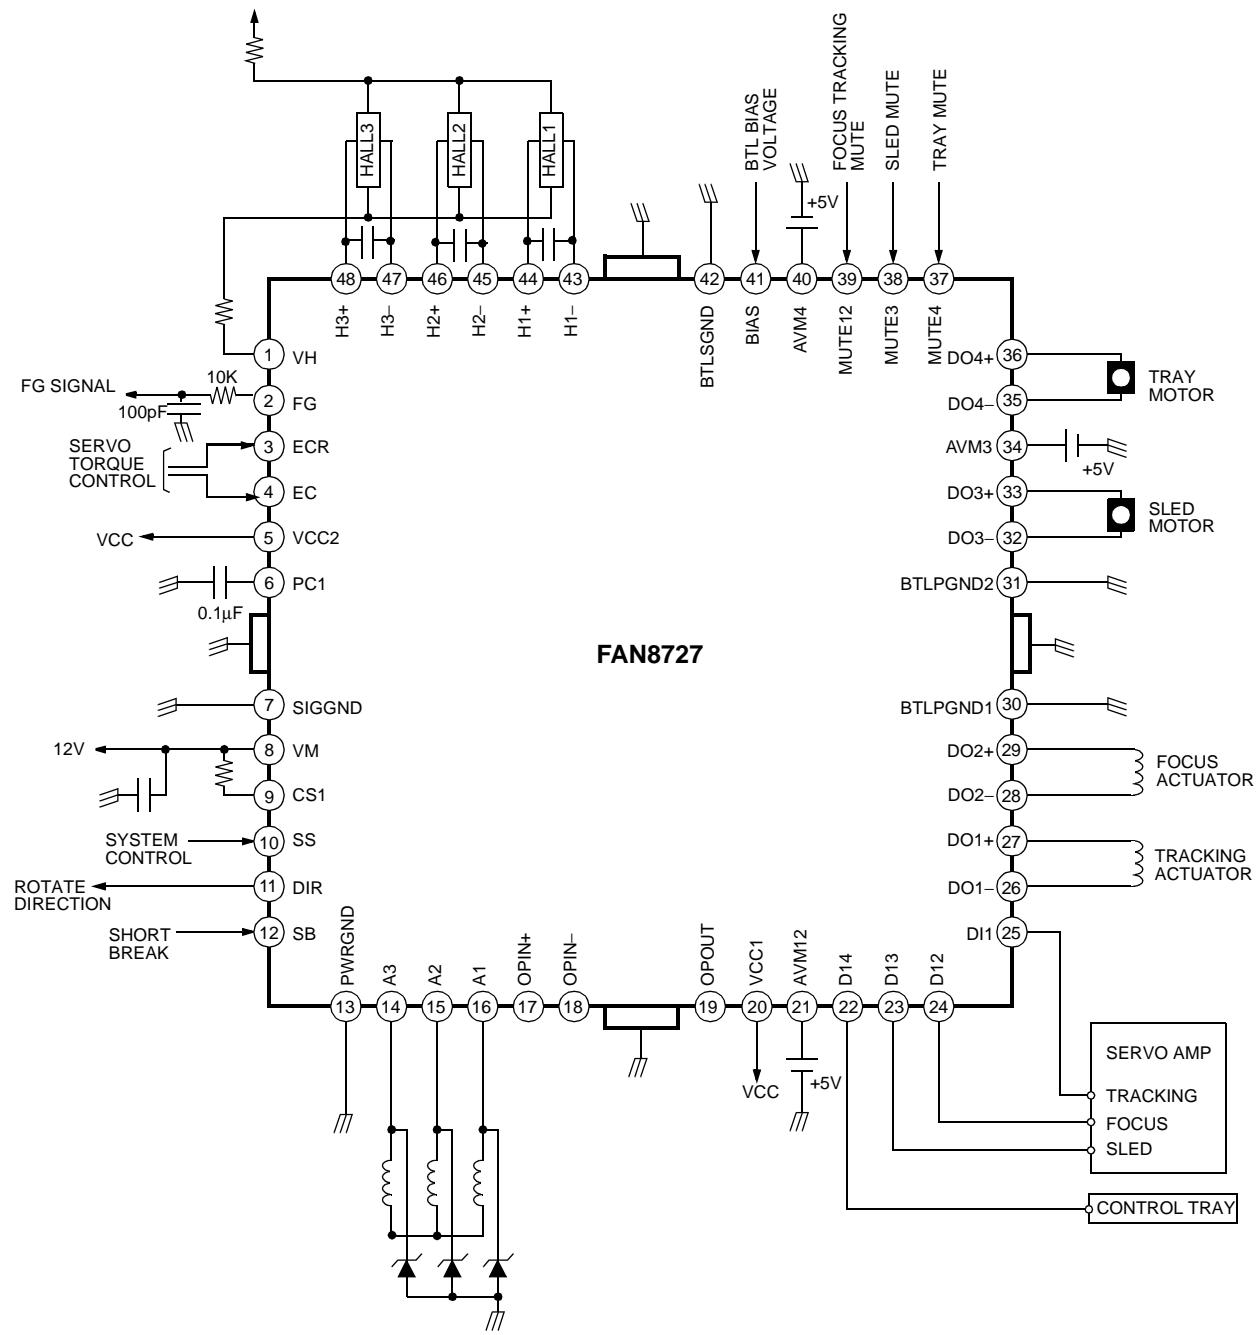



## **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.