
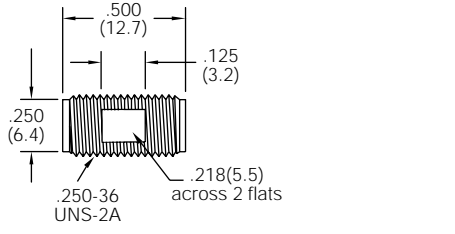



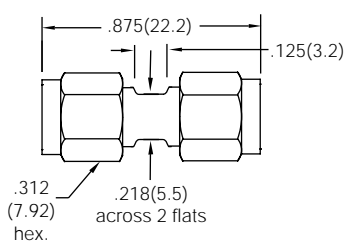

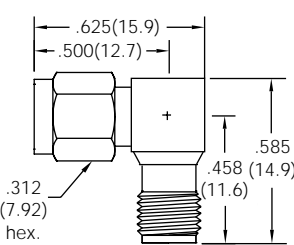


| | |
|--|---|
| <p>Fig. 1</p>   <p>SMA Straight Adapter, Jack-Jack 901-9217 Gold Plated 901-9217-SF Passivated Finish</p> | <p>Fig. 2</p>   <p>SMA Straight Adapter, Plug-Jack 901-9216 Gold Plated 901-9216-SF Passivated Finish</p> |
| <p>Fig. 3</p>   <p>SMA Straight Adapter, Plug-Plug 901-9218 Gold Plated 901-9218-SF Passivated Finish</p> | <p>Fig. 4</p>   <p>SMA Angle Adapter, Plug-Jack 901-125-11 Gold Plated 901-125-11SF (M55339/02-30001) Passivated</p> |

SMA IN-SERIES ADAPTERS

| Description | Plt. | Ins | Notes | Mil. No. M55339/ | Amphenol Number | Fig. |
|--------------------|------|-----|--|------------------|---------------------|------|
| Straight Jack-Jack | P9 | D1 | DC-18GHz Max. VSWR 1.14 Captive Contact | — | 901-9217 | 1 |
| | P12 | | | — | 901-9217-SF | |
| Straight Plug-Jack | P9 | D1 | DC-18GHz Max. VSWR 1.14 Captive Contact | — | 901-9216 | 2 |
| | P12 | | | — | 901-9216-SF | |
| Straight Plug-Plug | P10 | D1 | DC-18GHz Max. VSWR 1.14 Captive Contact | — | 901-9218 | 3 |
| | P12 | | | — | 901-9218-SF | |
| Angle Plug-Jack | P13 | D1 | DC-18GHz Max. VSWR 1.23 Captive Contact | — | 901-125-11 | 4 |
| | P13 | | | 02-30001 | 901-125-11SF | |