


37.5-150W DC/DC Power Modules 48V Input Series

- *High efficiency 91.5% Typ (5V) at full load*
- *Industry standard footprint*
- *Max case temperature +100°C*
- *Wide input voltage range according to ETSI specifications*
- *High power density, up to 55W/in³*
- *1,500 Vdc isolation voltage*
- *MTBF > 3 million hours in accordance with Bellcore TR-332*

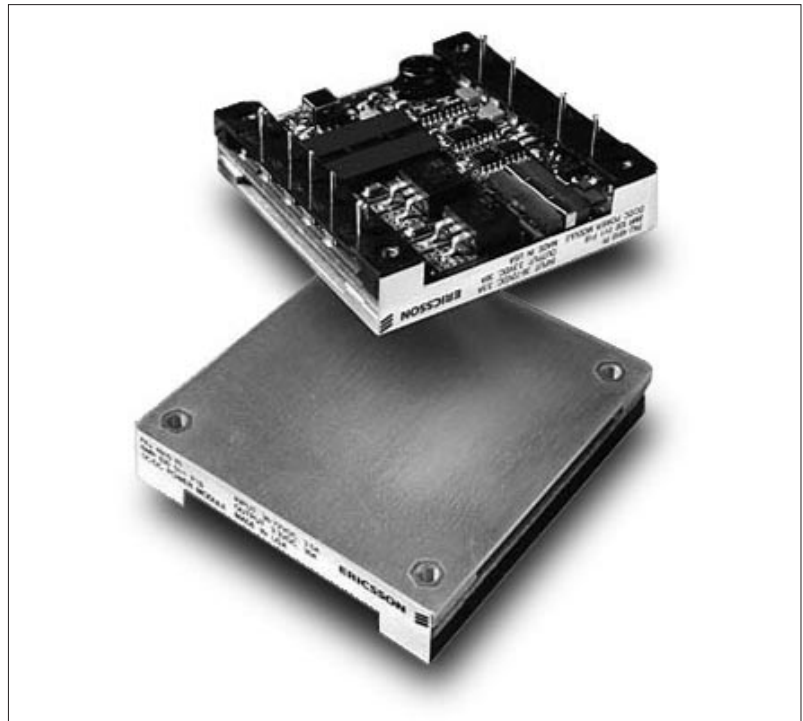

The PKJ series represents a “third generation” of High Density DC/DC Power Modules providing 90% efficiency. To achieve this high efficiency, Ericsson uses proprietary drive and control circuits with planar magnetics and low resistivity multilayer PCB technology, and a patent pending topology with active rectification. The PKJ series can be used without bulky and height consuming heatsinks, resulting in a lower total cost. This also provides narrow board spacing for electronic, shelf based applications.

The products are in the industry standard package size and offer a beneficial alternative to competing products on the market. Because for certain applications they may not require heatsinks, they are ideal for cost sensitive or high-density applications.

The PKJ series also offers the flexibility of using a heatsink when needed, enabling reduced airflow, extended reliability or higher ambient temperature operation in a wide range of 48V and 60V DC powered systems. Similar to other Ericsson Power Modules, the PKJ series includes an under-voltage shut down facility, protecting the associated batteries from being too deeply discharged. The PKJ series also offers over-voltage protection, over-temperature protection and is short circuit proof.

These products are manufactured using highly automated manufacturing lines with a world-class quality commitment and a five-year warranty. Ericsson Components AB has been an ISO 9001 certified supplier since 1991. *For product program please see back cover.*

General

Absolute Maximum Ratings

Characteristics		min	max	Unit
T _C	Maximum Operating Case Temperature	-40	+100	°C
T _S	Storage temperature	-40	+125	°C
V _I	Continuous input voltage	-0.5	+75	Vdc
V _{ISO}	Isolation voltage (input to output test voltage)	1,500		Vdc
V _{RC}	Remote control voltage		15	Vdc
I ² t	Inrush transient		1	A ² s

Stress in excess of Absolute Maximum Ratings may cause permanent damage. Absolute Maximum Ratings, sometimes referred to as no destruction limits, are normally tested with one parameter at a time exceeding the limits of Output data or Electrical Characteristics.

If exposed to stress above these limits, function and performance may degrade in an unspecified manner. For design margin and to enhance system reliability, it is recommended that the PKJ series DC/DC power modules are operated at case temperatures below 90°C.

Input T_C < T_{Cmax}

Characteristics		Conditions		min	typ	max	Unit
V _I	Input voltage range ¹⁾			36		72	Vdc
V _{Ioff}	Turn-off input voltage	Ramping from higher voltage		31	33		Vdc
V _{Ion}	Turn-on input voltage	Ramping from lower voltage			34	36	Vdc
C _I	Input capacitance				2.8		µF
I _{lac}	Reflected ripple current	5 Hz to 20 MHz-150W			20		mA p-p
I _I max	Maximum input current	V _I = V _{I min}	50 W 75 W 100 W 150 W			1.6 2.4 3.2 5.3	A
P _{li}	Input idling power	I _O = 0		2.5	7.5		W
P _{RC}	Input stand-by power (turned off with RC)	V _I = 50V	RC open	.05	2.5		W
TRIM	Maximum input voltage on trim pin					6	Vdc

1) See also Input Voltage in the Operating Information section

Safety

The PKJ Series DC/DC power modules are designed to comply with EN 60 950 Safety of information technology equipment including electrical business equipment.

The PKJ DC/DC power modules are also recognized by UL and meet the applicable requirements in UL 1950, Safety of information technology equipment and applicable Canadian safety requirements.

The isolation is an operational insulation in accordance with EN 60 950. The DC/DC power module should be installed in end-use equipment, in compliance with the requirements of the ultimate application, and is intended to be supplied by an isolated secondary circuit. Consideration should be given to measuring the case temperature to comply with T_{Cmax} when in operation.

When the supply to the DC/DC power module meets all the requirements for SELV (<60Vdc), the output is considered to remain within SELV limits (level 3). If connected to a 60V DC power system, reinforced insulation must be provided in the power supply that isolates the input from the mains. Single fault testing in the power supply must be performed in combination with the DC/DC power module to demonstrate that the output meets the requirement for SELV. One pole of the input and one pole of the output is to be grounded or both are to be kept floating.

Environmental Characteristics

Characteristics	Test procedure & conditions		
Random Vibration	IEC 68-2-34E _d	Frequency Spectral density Duration	10...500 Hz 0.025 g ² /Hz 10 min in each direction
Sinusoidal Vibration	IEC 68-2-6 F _c	Frequency Amplitude Acceleration # of cycles	10-500 Hz 0.75mm 10g 10 in each axis
Shock (half sinus)	IEC 68-2-27 E _a	Peak acceleration Duration	50 g 3ms
Temperature change	IEC 68-2-14 N _a	Temperature Number of cycles	-40°C...+100°C 300
Accelerated damp heat	IEC 68-2-3 C _a with bias	Temperature Humidity Duration	85°C 85% RH 500 hours
Solder resistibility	IEC 68-2-20 T _b method IA	Temperature, solder Duration	260° C 10...13 s

Safety (continued)

The galvanic isolation is verified in an electric strength test. The test voltage (V_{ISO}) between input and output is 1,500 Vdc for 60 sec. Leakage current is less than 1 μ A @ 50Vdc.

Flammability ratings of the terminal support and internal plastic construction details meet UL 94V-0.


A fuse should be used at the input of each PKJ series power module.

If a fault occurs in the power module, that imposes a short on the input source, this fuse will provide the following two functions:

- Isolate the failed module from the input source so that the remainder of the system may continue operation.
- Protect the distribution wiring from overheating.

A fast blow fuse should be used with a rating of 10A or less. It is recommended to use a fuse with the lowest current rating, that is suitable for the application.

Mechanical Data

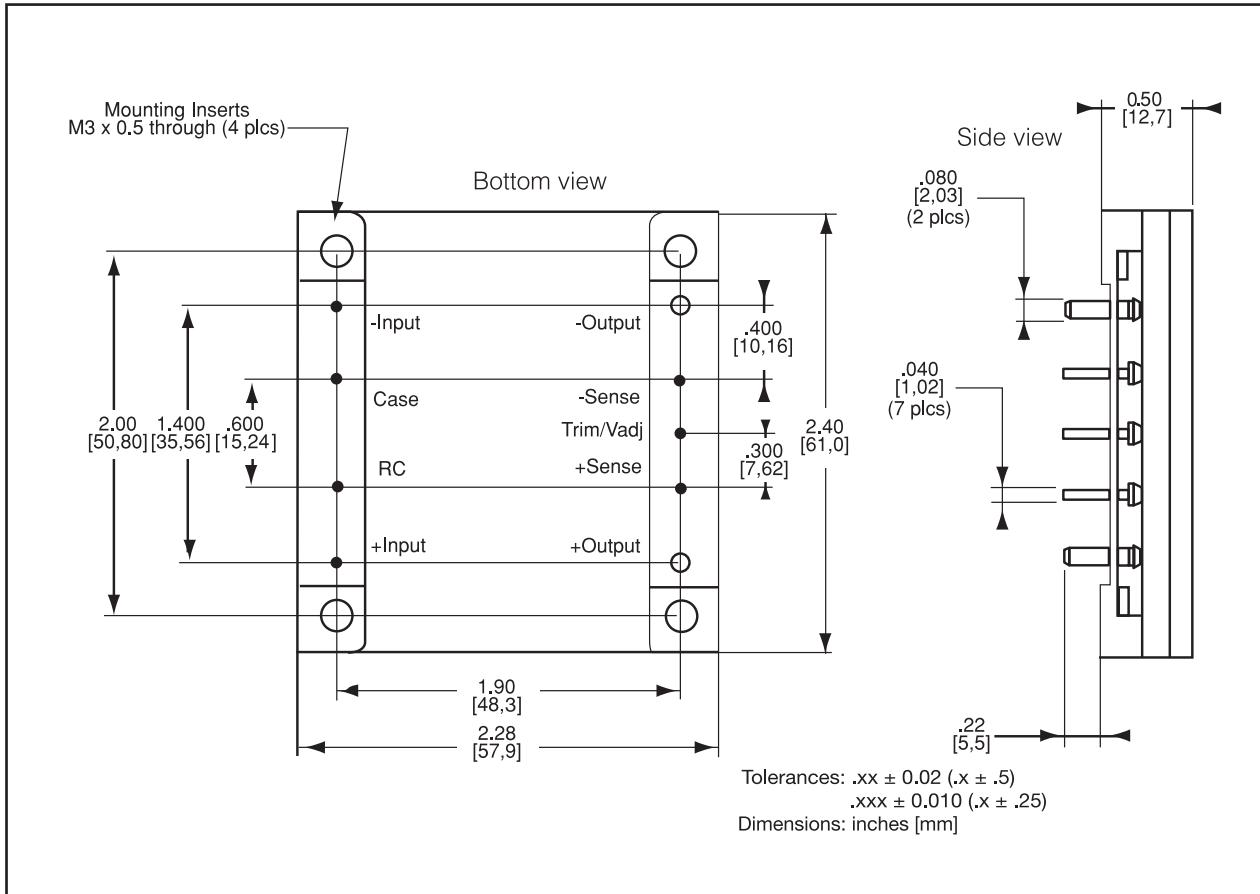

Connections

Designation	Function
-In	Negative input
Case	Connected to base plate
RC	Remote control (primary). To turn-on and turn-off the output
+In	Positive input
-Out	Negative output
-Sen	Negative remote sense (if sense not needed, connect to -Out)
Trim	Output voltage adjust
+Sen	Positive remote sense (if sense not needed, connect to +Out)
+Out	Positive output

Weight

85 grams

Case

Aluminum baseplate with metal standoffs.


Pins

Pin material: Brass

Pin plating: Tin/Lead over Nickel.






Thermal Data

The PKJ series DC/DC power modules has a robust thermal design which allows operation at case (baseplate) temperatures (T_C) up to $+100^\circ\text{C}$. The main cooling mechanism is convection (free or forced) through the case or optional heatsinks.

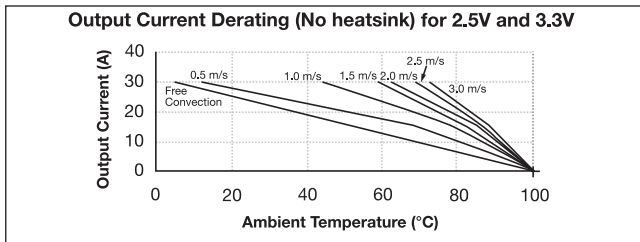

The graph above shows the allowable maximum output current to maintain a maximum $+100^\circ\text{C}$ case temperature. Note that the ambient temperature is the air temperature adjacent to the power module which is typically elevated above the room environmental temperature.

The graphs below can be used to estimate case temperatures for given system operating conditions (see Thermal design). For further information on optional heatsinks, please contact your local Ericsson sales office.

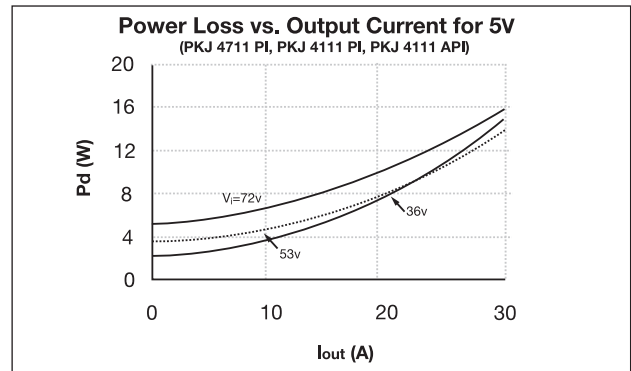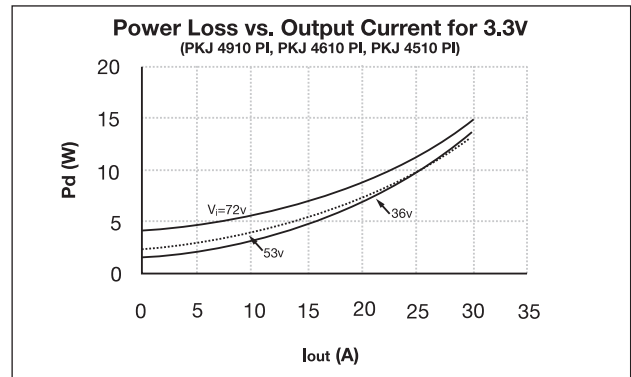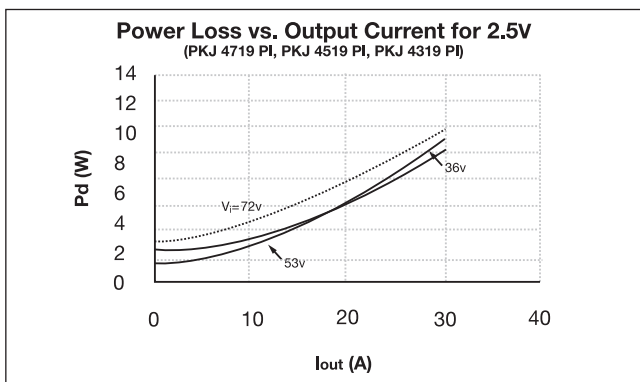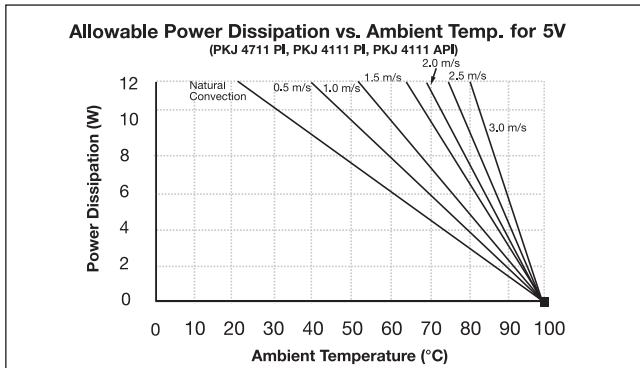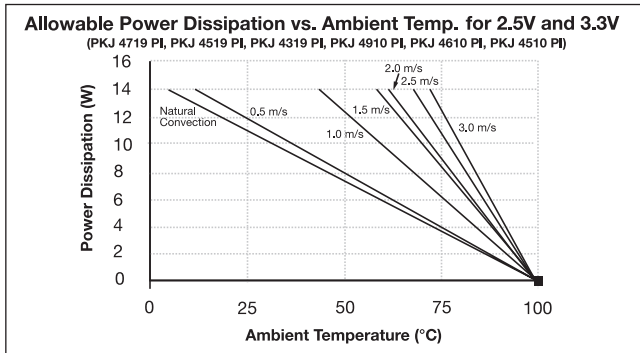

Thermal Design

The thermal data can be used to determine thermal performance without a heatsink.

Case temperature is calculated by the following formula:

$$T_C = T_A + P_d \times R_{thC-A} \text{ where } P_d = P_O / (\eta - 1)$$

Where:

T_C : Case Temperature



T_A : Local Ambient Temperature

P_d : Dissipated Power

R_{thC-A} : Thermal Resistance from T_C to T_A

The efficiency η can be found in the tables on the following pages.

For design margin and to enhance system reliability, it is recommended that the PKJ series DC/DC power modules are operated at case temperatures below 90°C .

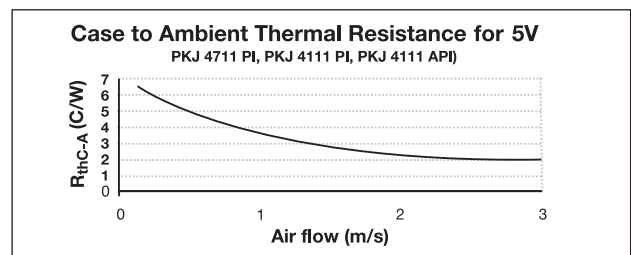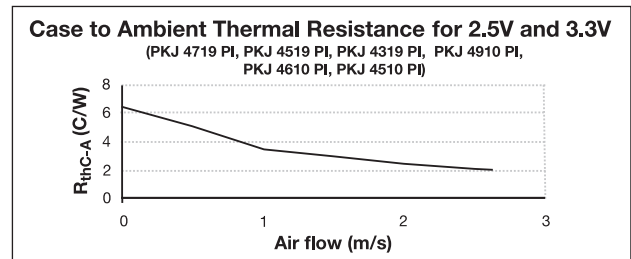

PKJ 4719 PI (75W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		2.45	2.5	2.55	V
	Output adjust range	$I_O = 0$ to I_{Omax}		2.0		2.75	V
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}		2.38		2.63	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$			2	15	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0$ to I_{Omax}			2	15	mV
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$		±160			mVpeak
t_{tr}	Load transient recovery time						50
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$		35	55		ms
I_O	Output current			0		30	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				75	W
I_{lim}	Current limit threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		31	35	41	A
I_{sc}	Short circuit current				35	41	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mVp-p
SVR	Supply voltage rejection	$f < 1\text{ kHz}$		-53			dB
OVP	Overvoltage protection			3.0	3.3	3.9	V

Miscellaneous

Characteristics		Conditions		min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		84	87		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$			11.2		W
f_o	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$			150		kHz

PKJ 4519 PI (50W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		2.45	2.50	2.55	V
	Output adjust range	$I_O = 0$ to I_{Omax}		2.0		2.75	V
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}		2.38		2.63	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = 0$ to I_{Omax}			2	15	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0$ to I_{Omax}			2	15	mV
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $dI/dt = 1\text{A}/\mu\text{s}$		± 100			mVpeak
t_{tr}	Load transient recovery time			50			μs
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$		30	55		ms
I_O	Output current			0		20	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				50	W
I_{lim}	Current limit threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		21	25	31	A
I_{SC}	Short circuit current				25	31	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mVp-p
SVR	Supply voltage rejection	$f < 1\text{ kHz}$		-53			dB
OVP	Overvoltage protection			3.0	3.3	3.9	V

Miscellaneous

Characteristics		Conditions		min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		86	89		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$			6.2		W
f_o	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$			150		kHz

PKJ 4319 PI (37.5W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		2.45	2.50	2.55	V
	Output adjust range	$I_O = 0$ to I_{Omax}		2.0		2.75	V
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}		2.38		2.63	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$			2	15	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0$ to I_{Omax}			2	15	mV
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$			± 90		mVpeak
t_{tr}	Load transient recovery time				50		μs
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$			30	55	ms
I_O	Output current			0		15	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				37.5	W
I_{lim}	Current limit threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		16	17	24	A
I_{SC}	Short circuit current				17	25	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mVp-p
SVR	Supply voltage rejection	$f < 1\text{ kHz}$		53			dB
OVP	Overvoltage protection			3.0	3.3	3.9	V

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$	86	89		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$		4.6		W
f_o	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$		150		kHz

PKJ 4910 PI (99W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		3.25	3.30	3.35	V
	Output adjust range	$I_O = 0$ to I_{Omax}		2.64		3.63	V
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}		3.2		3.4	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$			1	10	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0$ to I_{Omax}			1	10	mV
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$		± 180			mV_{peak}
t_{tr}	Load transient recovery time			50			μs
t_S	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$		35	60		ms
I_O	Output current			0		30	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				100	W
I_{lim}	Current limit threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		31	35	39	A
I_{SC}	Short circuit current				35	41	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mVp-p
SVR	Supply voltage rejection (ac)	$f < 1\text{ kHz}$		-53			dB
OVP	Over voltage protection	$V_I = 53\text{V}$		3.9	4.4	5.0	V

Miscellaneous

Characteristics		Conditions		min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		86	89		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 50\text{V}$			12.2		W
f_O	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$			150		kHz

PKJ 4610 PI (66W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		3.25	3.30	3.35	V
	Output adjust range	$I_O = 0$ to I_{Omax}		2.64		3.63	V
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}		3.2		3.4	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$			1	10	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0$ to I_{Omax}			1	10	mV
V_{tr}	Load transient Voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$		± 140			mV_{peak}
t_{tr}				50			μs
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$			35	60	ms
I_O	Output current			0		20	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				66.6	W
I_{lim}	Current limit threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		21	24	30	A
I_{SC}	Short circuit current				28	32	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mV_{p-p}
SVR	Supply voltage rejection (ac)	$f < 1\text{kHz}$		-53			dB
OVP	Over voltage protection			3.9	4.4	5.0	V

Miscellaneous

Characteristics		Conditions		min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		88	90.5		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$			6.93		W
f_O	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$			150		kHz

PKJ 4510 PI (50W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		3.25	3.30	3.35	V
	Output adjust range	$I_O = 0$ to I_{Omax}		2.64		3.63	V
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}		3.2		3.4	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$			1	10	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0$ to I_{Omax}			1	10	mV
V_{tr}	Load transient Voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$			± 100		mV_{peak}
t_{tr}	Load transient recovery time				50		μs
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$			35	60	ms
I_O	Output current			0		15	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				50	W
I_{lim}	Current limit threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		16	19	22	A
I_{SC}	Short circuit current				21	23	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mVp-p
SVR	Supply voltage rejection (ac)	$f < 1\text{ kHz}$		-53			dB
OVP	Over voltage protection			3.9	4.4	5.0	V

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$	88	90.5		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$		5.2		W
f_O	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$		150		kHz

PKJ 4111 API (150W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		4.9	5.0	5.1	V
	Output adjust range	$I_O = 0.1$ to I_{Omax}		4.0		5.5	V
V_O	Output voltage tolerance band	$I_O = 0.1$ to I_{Omax}		4.85		5.15	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$			5	20	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0.1$ to I_{Omax}			5	20	mV
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$		± 200			mV_{peak}
t_{tr}	Load transient recovery time			50			μs
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$		55	90		ms
I_O	Output current			0		30	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				150	W
I_{lim}	Current limit threshold	$V_O = .90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		31	35	42	A
I_{SC}	Short circuit current				35	41	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mV_{p-p}
SVR	Supply voltage rejection (ac)	$f < 1\text{ kHz}$		-53			dB
OVP	Over voltage protection			5.8	6.1	7	V

Miscellaneous

Characteristics		Conditions		min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		88	90.5		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$			15.7		W
f_o	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$			200		kHz

PKJ 4111 PI (100W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output

Characteristics		Conditions		Output			Unit
				min	typ	max	
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$		4.9	5.0	5.1	V
	Output adjust range	$I_O = 0$ to I_{Omax}		4.0		5.5	V
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}		4.85		5.15	V
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$			5	20	mV
	Load regulation	$V_I = 53\text{V}$, $I_O = 0.1$ to I_{Omax}			5	20	mV
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$			± 120		mV_{peak}
t_{tr}	Load transient recovery time				20		μs
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$			55	90	ms
I_O	Output current			0		20	A
P_{Omax}	Max output power	At $V_O = V_{Onom}$				100	W
I_{lim}	Current limiting threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$		21	25	32	A
I_{SC}	Short circuit current				25	31	A
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$	$f < 20\text{ MHz}$		75	150	mV_{p-p}
SVR	Supply voltage rejection (ac)	$f < 1\text{ kHz}$		-53			dB
OVR	Over voltage protection			5.8	6.1	7	V

Miscellaneous

Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$	89	91.5		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$		9.3		W
f_O	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$		200		kHz

PKJ 4711 PI (75W)

$T_C = -40...+100^{\circ}\text{C}$, $V_I = 36...72\text{ V}$ dc unless otherwise specified.

Output



Characteristics		Conditions	Output			Unit	
			min	typ	max		
V_{O_i}	Output voltage initial setting and accuracy	$T_C = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$	4.9	5.0	5.1	V	
	Output adjust range	$I_O = 0$ to I_{Omax}	4.0		5.5	V	
V_O	Output voltage tolerance band	$I_O = 0$ to I_{Omax}	4.85		5.15	V	
	Line regulation	$V_I = 36...72\text{V}$, $I_O = I_{Omax}$		5	20	mV	
	Load regulation	$V_I = 53\text{V}$, $I_O = 0.1$ to I_{Omax}		5	20	mV	
V_{tr}	Load transient voltage deviation	Load step = $0.25 \times I_{Omax}$ $di/dt = 1\text{A}/\mu\text{s}$		± 100		mV_{peak}	
t_{tr}	Load transient recovery time			15		μs	
t_s	Start-up time	From V_I connection to $V_O = 0.9 \times V_{Onom}$		55	90	ms	
I_O	Output current		0		15	A	
P_{Omax}	Max output power	At $V_O = V_{Onom}$			75	W	
I_{lim}	Current limiting threshold	$V_O = 0.90 \times V_{Onom}$ @ $T_C < 100^{\circ}\text{C}$	16	20	26	A	
I_{SC}	Short circuit current			22	25	A	
V_{Oac}	Output ripple and noise	$I_O = I_{Omax}$		$f < 20\text{ MHz}$	75	150	mV_{p-p}
SVR	Supply voltage rejection (ac)	$f = 1\text{ kHz}$	-53			dB	
OVP	Over voltage protection		5.8	6.1	7	V	

Miscellaneous



Characteristics		Conditions	min	typ	max	Unit
η	Efficiency	$T_A = +25^{\circ}\text{C}$, $V_I = 53\text{V}$, $I_O = I_{Omax}$	89	91.5		%
P_d	Power dissipation	$I_O = I_{Omax}$, $V_I = 53\text{V}$		7.0		W
f_O	Switching frequency	$I_O = 0.1...1.0 \times I_{Omax}$		200		kHz

Typical Characteristics



PKJ 4719 PI (75W)

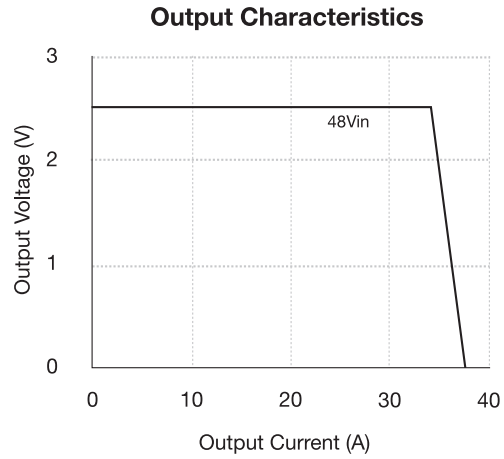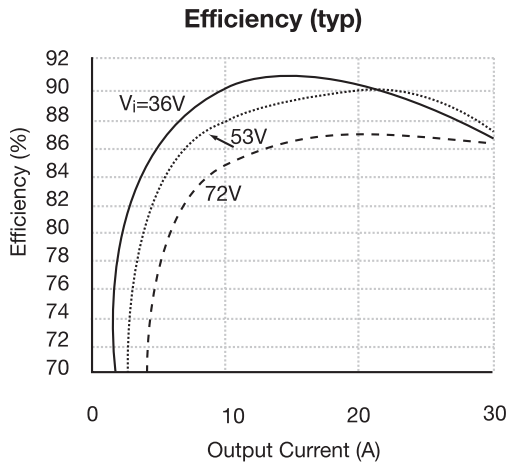



PKJ 4519 PI (50W)

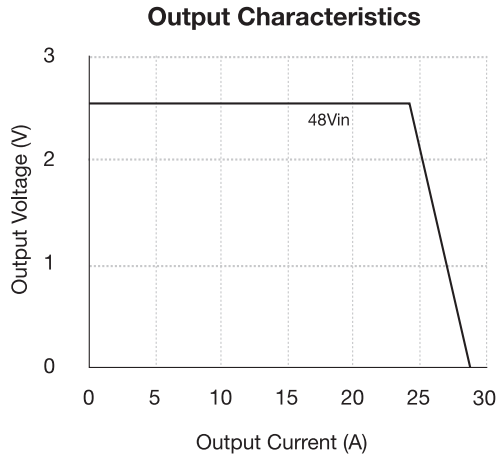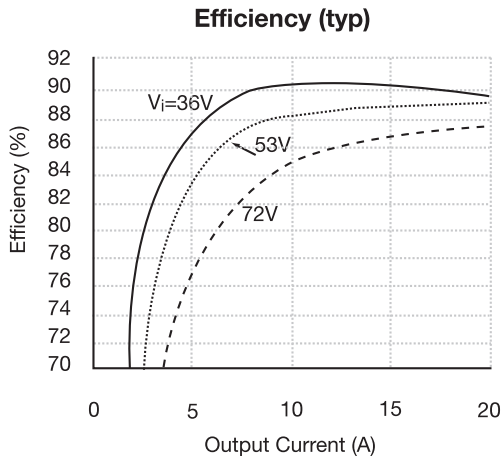



PKJ 4319 PI (37.5W)

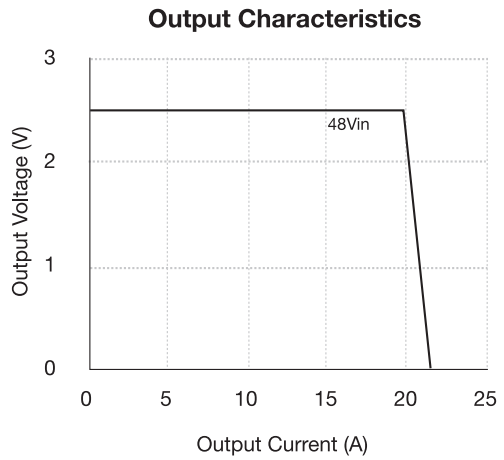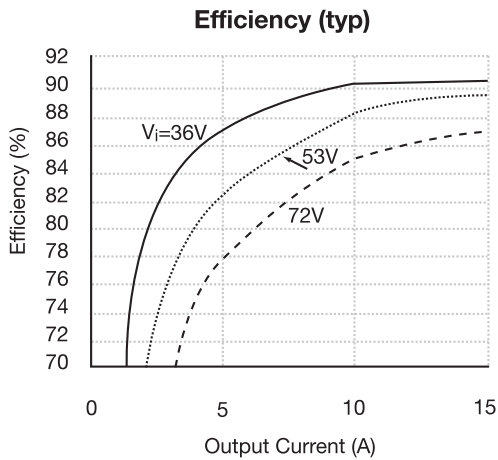



PKJ 4910 PI (99W)

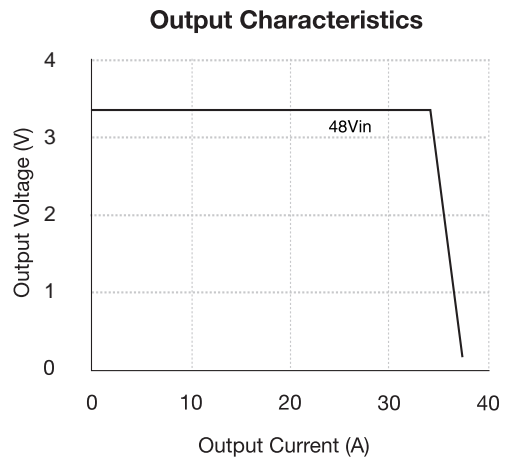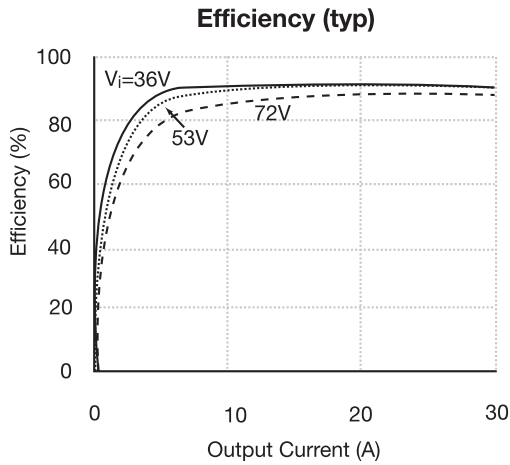

PKJ 4610 PI (66W)

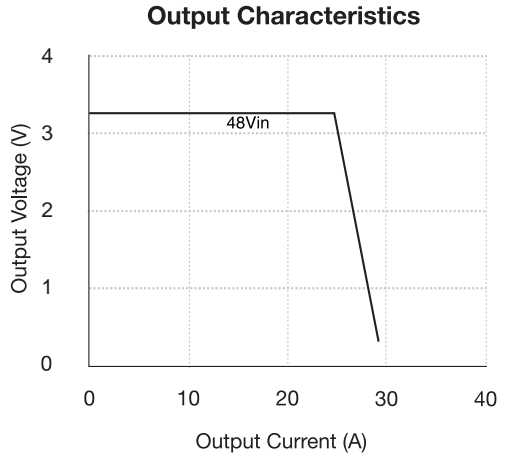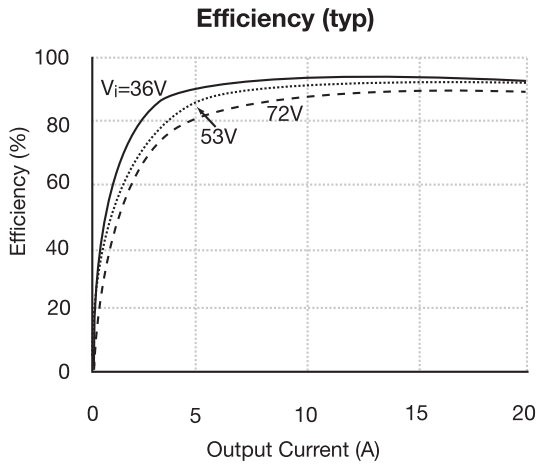


PKJ 4510 PI (50W)

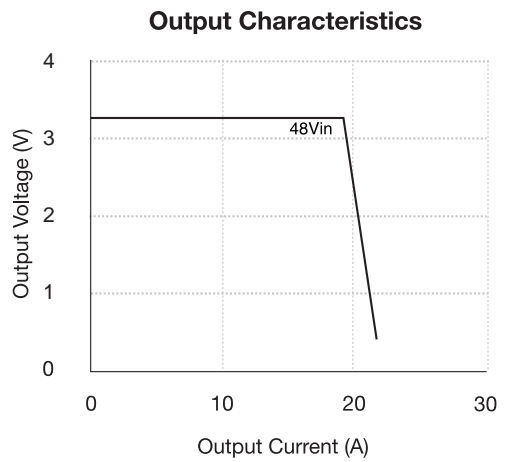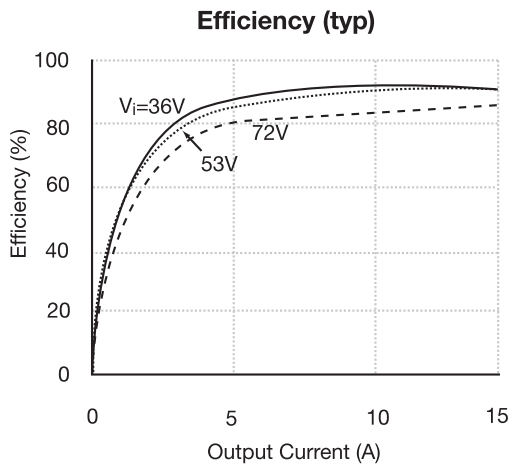


PKJ 4111 API (150W)

Efficiency (typ)

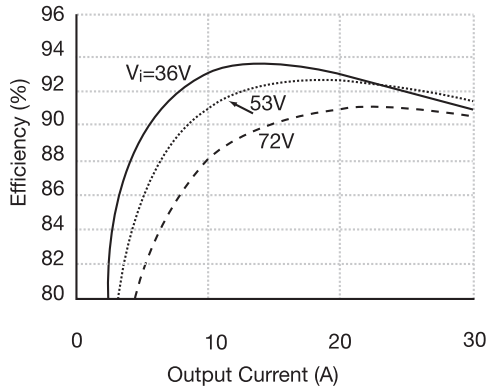


Output Characteristics

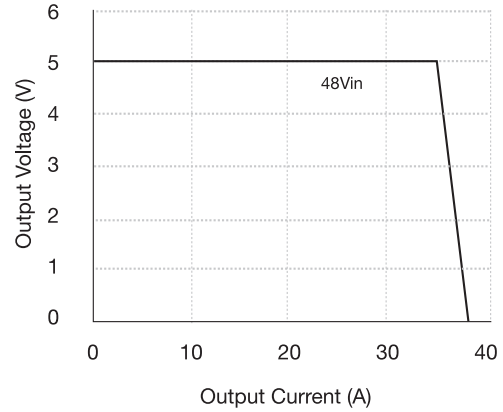


PKJ 4111 PI (100W)

Efficiency (typ)

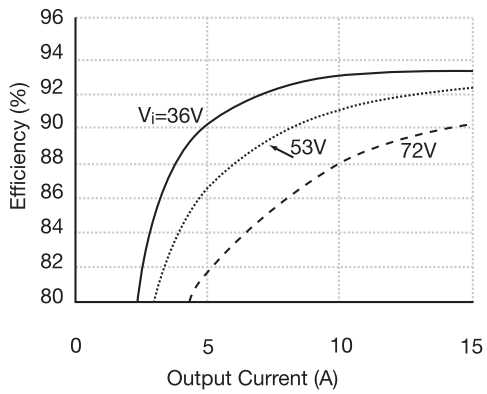


Output Characteristics

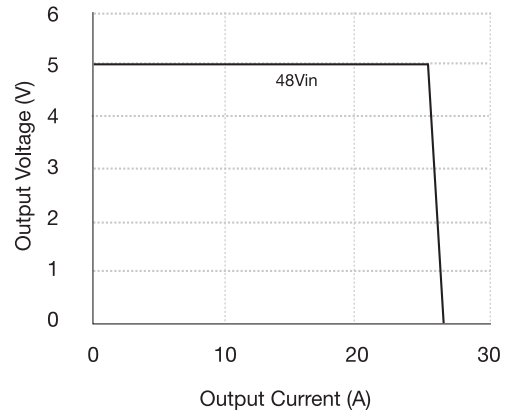


PKJ 4711 PI (75W)

Efficiency (typ)

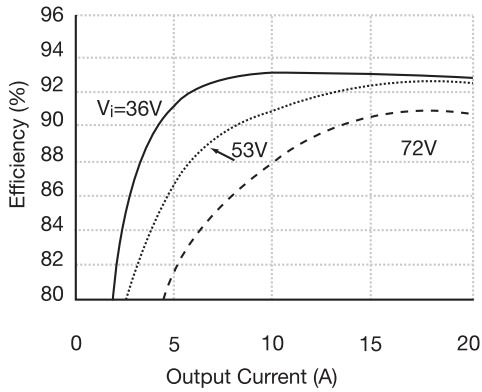

Output Characteristics

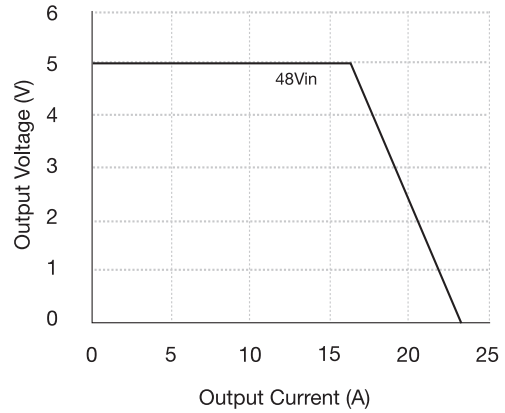


EMC Specifications

The PKJ power module is mounted on a double sided printed circuit board PCB with groundplane during EMC measurements.


The fundamental switching frequency is 200 kHz @ $I_O = I_{Omax}$.

Conducted EMI

Input terminal value with 100 μ F capacitor (typ) and additional PI filter.

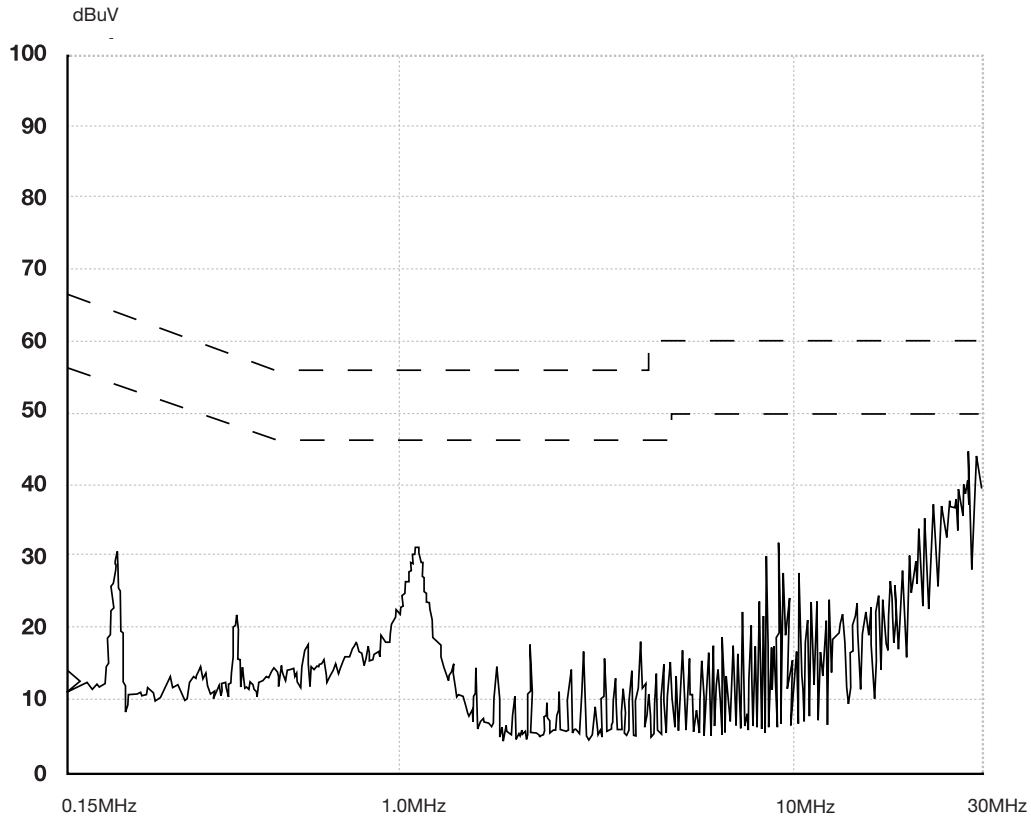

EMI Filter for PKJ Module

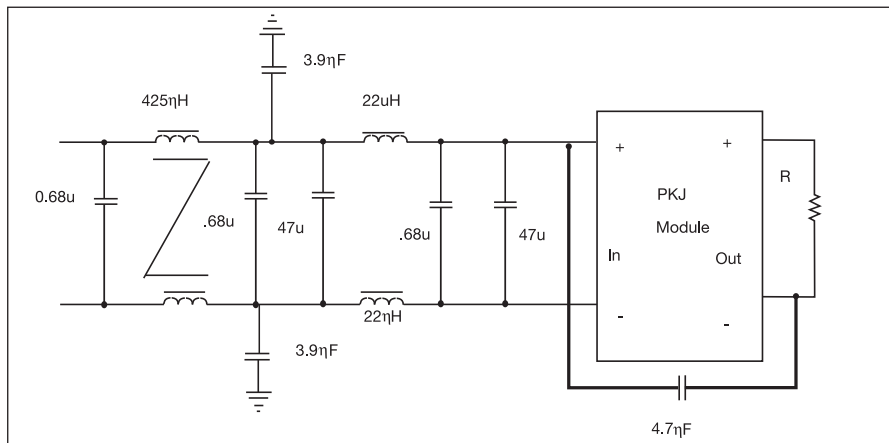

L1: 425 μ H, 8.1A (Coilcraft P3217A)

L2: 22 μ H, 7A (Coilcraft D055022-223)

Operating Information

Input Voltage

The input voltage range 36...72V meets the requirements in the European Telecom Standard ETS 300 132-2 for normal input voltage range in -48 V and -60 V DC power systems, -40.5...-57.0 V and -50.0...-72.0 V respectively. At input voltages exceeding 72 V, (abnormal voltage), the power loss will be higher than at normal input voltage and T_C must be limited to absolute max +90° C. The absolute max continuous input voltage is 75 V DC. Output characteristics will be marginally affected at input voltages exceeding 72 V.

Remote Control (RC)

The RC pin can be wired directly to -In, to allow the module to power up automatically without the need for control signals.

A mechanical switch or an open collector transistor or FET can be used to drive the RC inputs. The device must be capable of sinking up to 1mA at a low level voltage of 1.0V, maximum of 15 V dc, for the primary RC.

Standard Remote Control		Optional Remote Control	
RC (primary)	Power module	RC (primary)	Power module
Low	ON	Low	OFF
Open/High	OFF	Open/High	ON

Remote Sense

All PKJ series DC/DC power modules have remote sense that can be used to compensate for moderate amounts of resistance in the distribution system and allow for voltage regulation at the load or other selected point. The remote sense lines will carry very little current and do not need a large cross sectional area. However, the sense lines on a PCB should be located close to a ground trace or ground plane. In a discrete wiring situation, the usage of twisted pair wires or other technique for reducing noise susceptibility is recommended.

The power module will compensate for up to 0.5 V voltage drop between the sense voltage and the voltage at the power module output pins. The output voltage and the remote sense voltage offset must be less than the minimum overvoltage trip point.

If the remote sense is not needed the -Sen should be connected to -Out and +Sen should be connected to +Out.

Current Limiting General Characteristics

All PKJ series DC/DC power modules include current limiting circuitry that makes them able to withstand continuous overloads or short circuit conditions on the output. The output voltage will decrease toward zero for heavy overloads (see product code characteristics).

The power module will resume normal operation after removal of the overload. The load distribution system should be designed to carry the maximum short circuit output current specified (see applicable code typical characteristics).

Over Voltage Protection (OVP)

All PKJ DC/DC power modules have latching output overvoltage protection. In the event of an overvoltage condition, the power module will shut down. The power module can be restarted by cycling the input voltage.

Turn-off Input Voltage (V_{Ioff})


The power module monitors the input voltage and will turn on and turn off at predetermined levels.

Output Voltage Adjust (Trim) Voltage Trimming

All PKJ series DC/DC power modules have an Output Voltage Adjust pin. This pin can be used to adjust the output voltage above or below V_{O1} . When increasing the output voltage, the voltage at the output pins (including any remote sensing offset) must be kept below the overvoltage trip point. Also note that at elevated output voltages the maximum power rating of the module remains the same, and the output current capability will decrease correspondingly.


To decrease V_O connect Radj from - SEN to Trim

To increase V_O connect Radj from + SEN to Trim

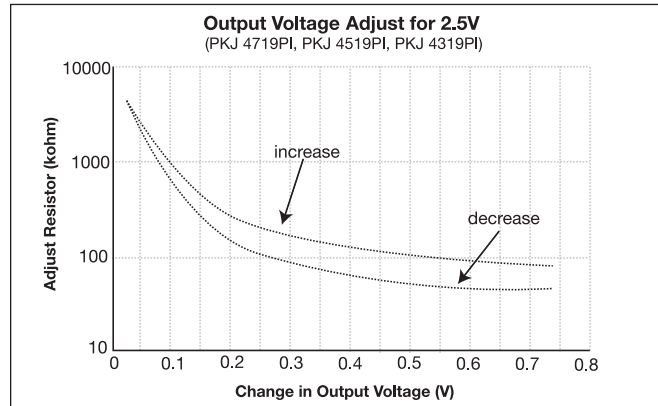


$$\text{Decrease : Radj} = (21 * V_O - 2.5) / (2.5 - V_O) \text{ k ohm}$$

$$\text{Increase : Radj} = (9.7 * V_O + 1.225) / (0.49 * V_O - 1.225) \text{ k ohm}$$

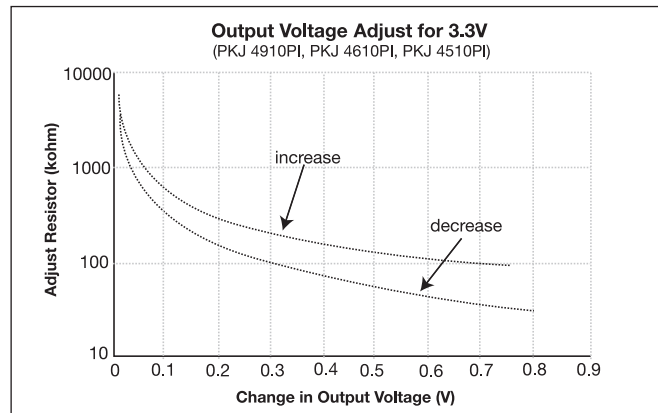

$$\text{Decrease : Radj} = (11 V_O - 3.3) / (3.3 - V_O) \text{ k ohm}$$

$$\text{Increase : Radj} = 15.94 * (V_O + 0.207) / (V_O - 3.3) \text{ k ohm}$$

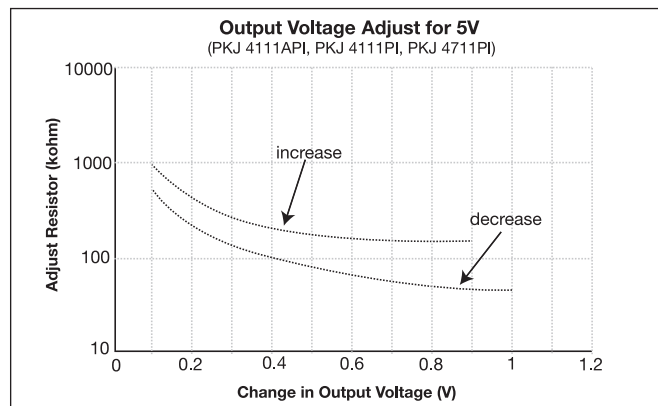

$$\text{Decrease : Radj} = (11 V_O - 4.965) / (4.965 - V_O) \text{ k ohm}$$

$$\text{Increase : Radj} = (7.286 * V_O + 1.225) / (0.2467 * V_O - 1.225) \text{ k ohm}$$

Product Program

V_I	V_O/I_O	P_{Omax}	Ordering Number
48/60 V	2.5V/30A	75W	PKJ 4719 PI
48/60 V	2.5V/20A	50W	PKJ 4519 PI
48/60 V	2.5V/15A	37.5W	PKJ 4319 PI
48/60 V	3.3V/30A	100W	PKJ 4910 PI
48/60 V	3.3V/20A	66W	PKJ 4610 PI
48/60 V	3.3V/15A	50W	PKJ 4510 PI
48/60 V	5V/30A	150W	PKJ 4111 API
48/60 V	5V/20A	100W	PKJ 4111 PI
48/60 V	5V/15A	75W	PKJ 4711 PI

To order with Optional Remote Control add P to end of ordering number for example PKJ 4719 PIP.

Ericsson Energy Systems' Sales Offices:

Brazil:	Phone: +55 11 681 0040	Fax: +55 11 681 2051
Denmark:	Phone: +45 33 883 109	Fax: +45 33 883 105
Finland:	Phone: +358 9 299 4098	Fax: +358 9 299 4188
France:	Phone: +33 1 4083 7720	Fax: +33 1 4083 7741
Germany:	Phone: +49 211 534 1516	Fax: +49 211 534 1525
Great Britain:	Phone: +44 1793 488 300	Fax: +44 1793 488 301
Hong Kong:	Phone: +852 2590 2356	Fax: +852 2590 7152
Italy:	Phone: +39 2 7014 4203	Fax: +39 2 7014 4260
Japan:	Phone: +81 3 5216 9091	Fax: +81 3 5216 9096
Norway:	Phone: +47 66 841 906	Fax: +47 66 841 909
Russia:	Phone: +7 095 247 6211	Fax: +7 095 247 6212
Spain:	Phone: +34 91 339 1858	Fax: +34 91 339 3145
Sweden:	Phone: +46 8 721 6258	Fax: +46 8 721 7001
United States:	Phone: +1 888 853 6374	Fax: +1 972 583 7999

Information given in this data sheet is believed to be accurate and reliable. No responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Components. These products are sold only according to Ericsson Components' general conditions of sale, unless otherwise confirmed in writing.
Specifications subject to change without notice.