


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AJ	16		C	OBS -2 PER OU20-0072-01	16APR01	MO

- ① PHOSPHOR BRONZE PER QQ-B-750
- ② ZINC PER QQ-Z-363
- ③ POLYMETHYLPENTENE: GENERAL PURPOSE
- ④ NICKEL PLATE PER QQ-N-290, 3.81µm [.000150] MIN THICKNESS
- ⑤ GOLD PLATE PER MIL-G-45204, 0.38µm [.000015] MIN THICKNESS

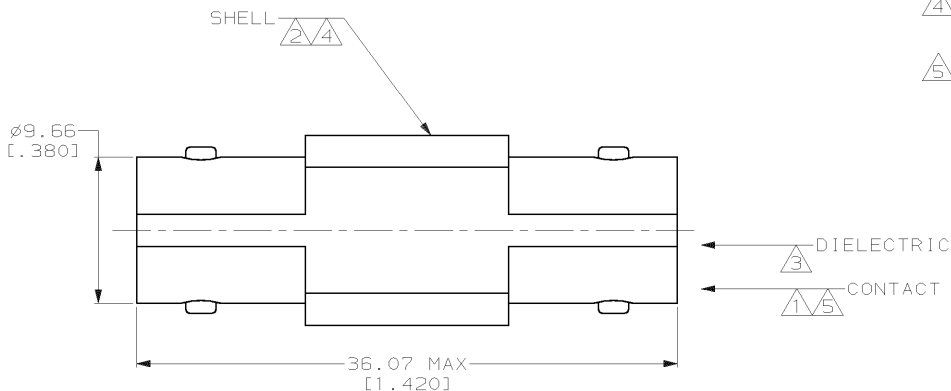

OBSOLETE	414414-2
	414414-1
	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN MM [INCHES] TOLERANCES ON:		DR 9-8-92 M.E. COWHER	AMP AMP Incorporated Harrisburg, PA 17105-3608
2. PLC DEC ± 0.05 (±.002)		CHK 9-14-92 M. PHILLIPS	
3. PLC DEC ± -		APPD 9-14-92 M. PHILLIPS	NAME
ANGLES ± -		APPD 9-14-92 M.E. COWHER	JACK ADAPTER ASSEMBLY, COML BNC
MATERIAL	①②③	PRODUCT SPEC	SIZE
FINISH	④⑤	APPLICATION SPEC	CAGE CODE
		WEIGHT	DRAWING NO
			00779 C=414414
			SCALE
			4:1
			SHEET
			1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING