
Pomona®

Model 4240 Type "N" Male Terminated Plug

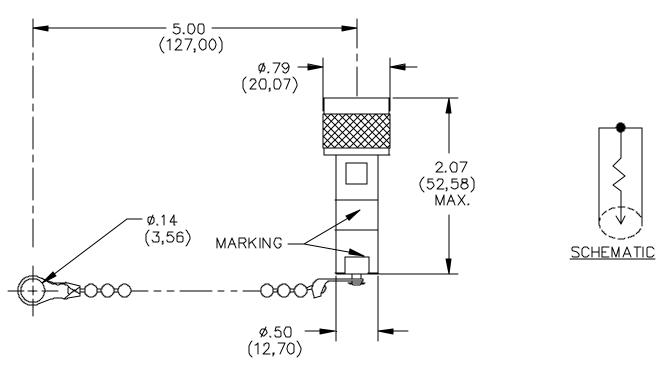

MATERIALS:

Body and Fittings: Brass, Tarnish Resistant Plating.

Center Contact: Brass, Gold Plated.

Dielectric: Teflon Gasket: Silicone rubber

Resistor: Deposited carbon film Marking: "Pomona 4240"

Label: "TERM, *Ω 1W"

RATINGS:

Frequency Range: DC to 500 MHz

Resistance Tolerance: ± 1% Power: 1W @ 70°C Max.

ORDERING INFORMATION: Model 4240-*

*= Resistance Value 50, 75, 600

Ordering Example: 4240-50 = 50 Ohm Value Resistance

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheet\SFlukeDataSheet\d4240_1_01.doc

Pomona*ACCESS* **90237** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

Page 1 of 1