




- ⚠ FOR MINI-APPLICATOR AND STRIPPER CRIMPER.
- ⚠ FOR HAND TOOL USE ONLY.
- 3. WIRE RANGE OF 20-24 AWG. INSULATION RANGE OF 1.27/1.52 [0.050-.060].
- 4. TIN PLATING MAY NOT APPEAR ON CARRIER STRIP.
- ⚠ 5. GOLD FLASH ON INSIDE OF LOCALIZED GOLD PLATE AREA, 2.54μm [0.000100] TIN PLATED ON CRIMP BARRELS, ALL OVER 0.76μm [0.000030] NICKEL UNDERPLATE.
- ⚠ 6. PLATED WITH 0.76μm [0.000030] GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, 2.54μm [0.000100] TIN ON CRIMP BARRELS, ALL OVER 1.27μm [0.000050] NICKEL UNDERPLATE.
 -OR-
 GOLD FLASH OVER PALLADIUM-NICKEL, 0.76μm [0.000030] TOTAL ON INSIDE OF LOCALIZED GOLD PLATE AREA, 2.54μm [0.000100] TIN ON CRIMP BARRELS, ALL OVER 1.27μm [0.000050] NICKEL UNDERPLATE.
- ⚠ 7. GOLD FLASH ON INSIDE OF LOCALIZED GOLD PLATE AREA, 0.76μm [0.000030] MIN TIN ON CRIMP BARRELS, ALL OVER 0.76μm [0.000030] MIN NICKEL UNDERPLATE.
- ⚠ 8. SPECIAL PACKAGING.

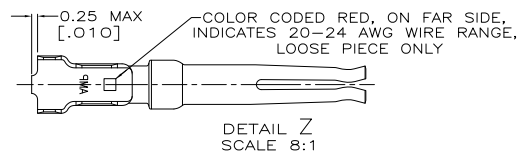

⚠	⚠	-	⚠ 1658537-6
⚠	⚠	-	1658537-5
⚠	⚠	SEE DETAIL Z	1658537-4
⚠	⚠	-	1658537-3
⚠	⚠	SEE DETAIL Z	1658537-2
⚠	⚠	-	1658537-1
FINISH	USE	LOOSE PIECE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 07/20/14

DESIGNED BY: M. WILMSLEY	DATE: 07/20/14	REVISED BY: M. WILMSLEY	DATE: 07/20/14
DESIGNED BY: M. WILMSLEY	DATE: 07/20/14	REVISED BY: M. WILMSLEY	DATE: 07/20/14
DESIGNED BY: M. WILMSLEY	DATE: 07/20/14	REVISED BY: M. WILMSLEY	DATE: 07/20/14
DESIGNED BY: M. WILMSLEY	DATE: 07/20/14	REVISED BY: M. WILMSLEY	DATE: 07/20/14

SOCKET CONTACT, 20 OF, 20-24 AWG, AMPLITE

114-10000

108-40005

100779

1658537

CUSTOMER DRAWING