

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LHR	DESCRIPTION	DATE	MIN	APD
		B		REVISED PER ECO-08-007460	24JUN2008	ZMR	CWR

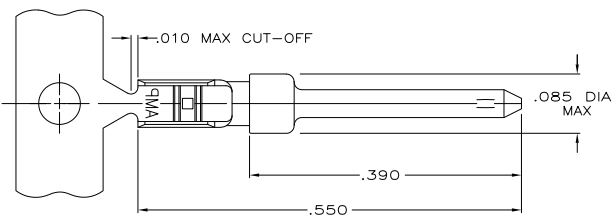

- 1. FOR MINI-APPLICATOR.
- 2. WIRE RANGE OF 18-22 AWG.
- 3. .068 MAX INSULATION DIAMETER ALLOWABLE WHEN USING 91067-2 EXTRACTION TOOL.
- 4. TIN PLATING MAY NOT APPEAR ON CARRIER STRIP.
- 5. GOLD PLATED IN LOCALIZED GOLD PLATE AREA AS FOLLOWS:
 .000030 MIN GOLD IN MATED AREA, .000100 MIN TIN ON WIRE BARRELS, ALL OVER .000050 MIN NICKEL UNDERPLATE.
 OR
 GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL IN MATED AREA, .000100 MIN TIN ON WIRE BARRELS, ALL OVER .000050 MIN NICKEL UNDERPLATE.

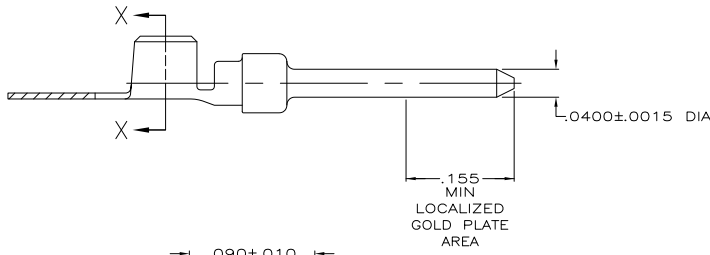

FINISH	1658541-1
	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: R. SAMICK 13AUG03	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CR: S. BOLASH 13AUG03	PIN CONTACT, 20 DF.	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: M. WALMSLEY 13AUG03	18-22 AWG, AMPLIMITE	
0 PLC ± .005		PRODUCT SPEC: 108-40005	RESTRICTED TO: -	
1 PLC ± .005		APPLICATION SPEC: 114-10000	SIZE: A2	CAGE CODE: 00779
2 PLC ± .005		WEIGHT: -	DRAWING NO: C=1658541	
3 PLC ± .005		FINISH: -	SCALE: 10:1	
4 PLC ± .005		SEE TABLE	SHEET: 1 of 1	
MATERIAL: BRASS PER		CUSTOMER DRAWING	REV: B	

AMP 1471-9 REV 31MAR2000

1658541

A