

4




3

2

1

THIS DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
GP	00				
	BC1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

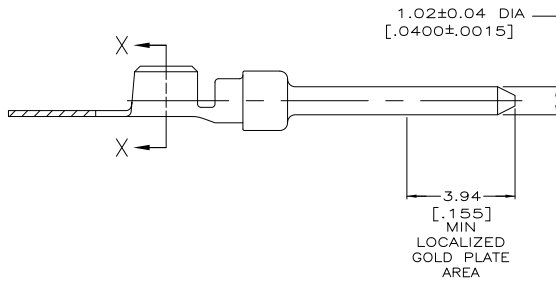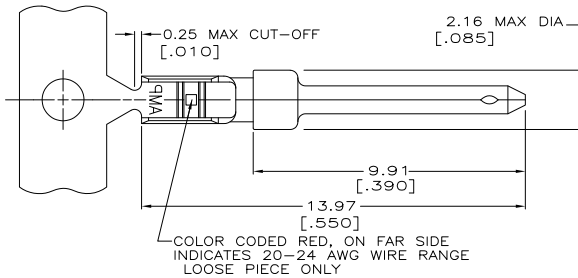

SECTION X-X  
 WIRE BARREL  
 SCALE 20:1

- △1 FOR MINI-APPLICATOR.  
 △2 FOR HAND TOOL USE ONLY.  
 △3 FOR STANDARD APPLICATOR PART #566051 & #566110 ONLY.  
 4. WIRE RANGE OF 20-24 AWG, .068 MAX INSULATION DIA.  
 5. GOLD PLATING MAY NOT APPEAR ON CARRIER STRIP.  
 △6 GOLD PLATING PER MIL-G-45204.  
 NICKEL PLATING PER QQ-N-290.  
 TIN PLATING PER MIL-T-10727.  
 △7 GOLD PLATED IN LOCALIZED GOLD PLATE AREA AS FOLLOWS:  
 0.76µm [.000030] MIN GOLD IN MATED AREA,  
 GOLD FLASH ON REMAINDER OF CONTACT, ALL OVER  
 1.27µm [.000050] MIN NICKEL UNDERPLATE.  
 OR  
 GOLD FLASH OVER  
 PALLADIUM-NICKEL PLATE, 0.76µm [.000030] MIN TOTAL IN MATED AREA,  
 GOLD FLASH ON REMAINDER OF CONTACT, ALL OVER  
 1.27µm [.000050] MIN NICKEL UNDERPLATE.  
 △8 PLATED WITH GOLD FLASH OVER  
 0.76µm [.000030] MIN NICKEL.  
 △9 PLATED WITH 2.54µm-5.08µm [.000100-.000200] TIN.  
 △10 PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA,  
 TIN PLATED WIRE BARREL, OVER  
 0.76µm [.000030] NICKEL.  
 △11 GOLD PLATED IN LOCALIZED GOLD PLATED AREA,  
 0.76µm [.000030] GOLD IN MATED AREA,  
 TIN PLATED WIRE BARREL, OVER  
 1.27µm [.000050] NICKEL.

SUPERSEDED BY 205202-2	STANDARD	△1	△1	STRIP	2-205202-5
SUPERSEDED BY 205202-6	STANDARD	△10	△1	STRIP	2-205202-2
SUPERSEDED BY 205202-6	STANDARD	△9	△1	STRIP	1-205202-4
	STANDARD	△8	△1	LOOSE PIECE	205202-7
	STANDARD	△6	△1	STRIP	205202-6
OBSOLETE	STANDARD	△8	△1	LOOSE PIECE	205202-4
	STANDARD	△7	△1	STRIP	205202-2
	PACKAGING TYPE	FINISH	USE	TYPE	PART NUMBER

DIMENSIONS		TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVALS		TE Connectivity	
mm	[INCHES]			DATE	NAME	SIZE	DATE
0 PL	± .005	DRM	S. WELDON	9-9-88			
1 PL	± .005	CHK	C. RICHARD	9-9-88			
2 PL	± .005	APPD	V. KUMAR	9-10-88			
3 PL	± .013 [.005]						
4 PL	± .005						
ANGLES	± .005						
MATERIAL	BRASS PER MIL-C-50	APPLICATION SPEC	114-10000	SIZE	A2	CAGE CODE	00779
FINISH	SEE TABLE	PRODUCT SPEC		DRAWING NO	C=205202	RESTRICTED TO	
		WEIGHT					
		FINISH	△6	CUSTOMER DRAWING		SCALE	10:1
						SHEET	1 of 1
						REV	BC1

1471-9 (3/11)

205202

A