


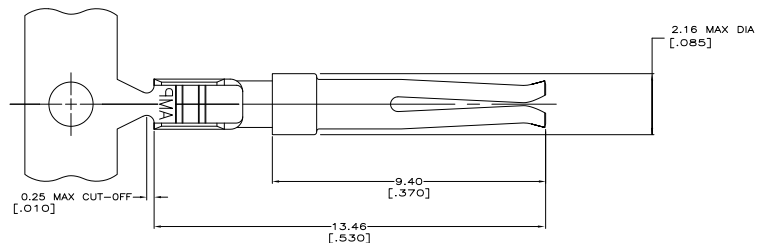


REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01		REVISED PER ECO-08-019103			



- △ PLATED WITH 0.76μm [.000030] GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON REMAINDER, ALL OVER 1.27μm [.000050] NICKEL UNDERPLATE. -OR- GOLD FLASH OVER PALLADIUM-NICKEL 0.76μm [.000030] TOTAL ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON REMAINDER, ALL OVER 1.27μm [.000050] NICKEL UNDERPLATE.
 - △ PLATED GOLD FLASH PER MIL-G-45204 OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
 - △ SELECTIVE GOLD PLATED 0.76μm [.000030] THICK PER MIL-G-45204 ON MATING END FOR A LENGTH OF 2.54 [.100], TIN PLATED WIRE BARRELS, ALL OVER 1.27μm [.000050] NICKEL PER QQ-N-290.
4. FOR USE WITH MIN-APPLICATOR.

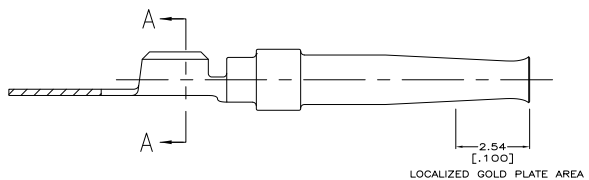

SECTION A-A
SCALE 20:1

SUPERSEDED BY 205311-3	△	2-205311-1
	△	205311-4
	△	205311-3
FINISH		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR. MICHAEL STARBUCK	DATE: 1-12-70	TYSO Electronics Corporation Harrisburg, PA 17105-3608
DESIGNED BY: J. S. Saylor		DATE: 1-12-70	REV: 1	
ENGINEERING: J. S. Saylor	DATE: 1-12-70	REV: 1	REV: 1	SOCKET CONTACT, SIZE 20 DF, 24-28 AWG
CHECKED BY: J. S. Saylor	DATE: 1-12-70	REV: 1	REV: 1	
DATE: 1-12-70	REV: 1	REV: 1	REV: 1	REVISED TO: -
CUSTOMER DRAWING	SEE TABLE	DATE: 1-12-70	REV: 1	REV: 1