

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F1	REVISED PER ECO-11-005027	11MAR11	RK	HMR

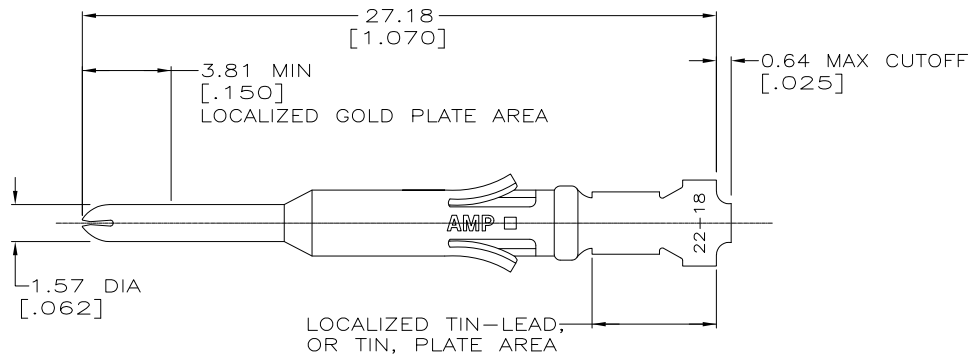

1. WIRE RANGE 22-18 AWG.
2. INSULATION RANGE 1.27-2.79 [.050-.110] DIA.
- ⚠ 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,  
1.27 μm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,  
BOTH OVER 1.27 μm [.000050] MIN NICKEL.
- ⚠ TIN PLATED.
- ⚠ GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727  
AND NICKEL PER QQ-N-290.
- ⚠ 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,  
1.27 μm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,  
BOTH OVER 1.27 μm [.000050] MIN NICKEL.

66581-7	⚠	66591-4
66581-4	⚠	66591-2
66581-2	⚠	66591-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	TE Connectivity																			
DIMENSIONS: INCHES		CHK R.STONE 06/22/94	NAME G.STEINHAUER 06/27/94																			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC																				
<table border="1"> <tr><td>0</td><td>PLC</td><td>± -</td></tr> <tr><td>1</td><td>PLC</td><td>± -</td></tr> <tr><td>2</td><td>PLC</td><td>± 0.13 [.005]</td></tr> <tr><td>3</td><td>PLC</td><td>± -</td></tr> <tr><td>4</td><td>PLC</td><td>± -</td></tr> <tr><td>5</td><td>ANGLES</td><td>± -</td></tr> </table>		0	PLC	± -	1	PLC	± -	2	PLC	± 0.13 [.005]	3	PLC	± -	4	PLC	± -	5	ANGLES	± -	APPLICATION SPEC		
0	PLC	± -																				
1	PLC	± -																				
2	PLC	± 0.13 [.005]																				
3	PLC	± -																				
4	PLC	± -																				
5	ANGLES	± -																				
MATERIAL BRS PER MIL-C-50	FINISH 5 SEE TABLE	WEIGHT -	SIZE A3	CAGE CODE 00779																		
		DRAWING NO C-66591	RESTRICTED TO -																			
CUSTOMER DRAWING			SCALE 6:1	SHEET 1 of 1																		
			REV F1																			