THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
FT	0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	W3	REVISED PER ECO-11-004587	11MAR11	RK	HMR

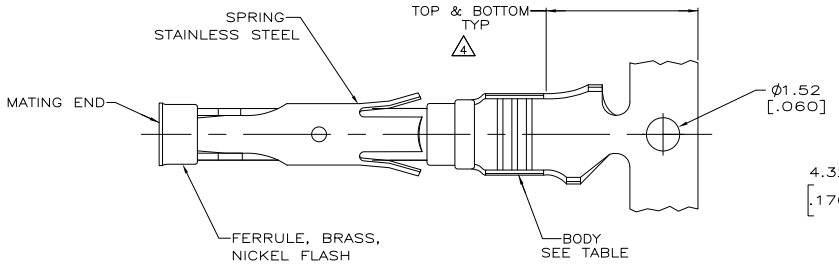

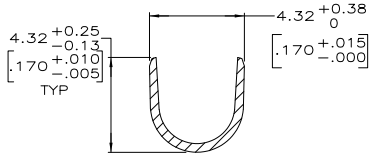

SECTION A–A

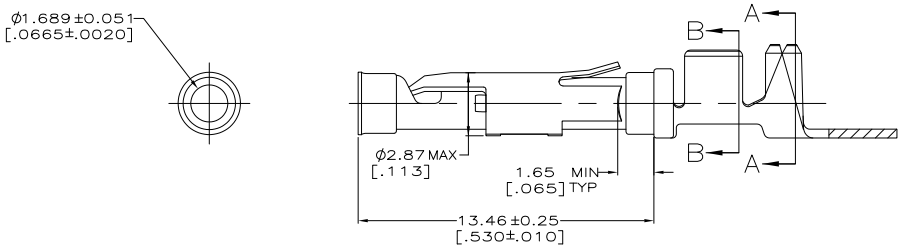



SECTION B–B

1. 0.51µm [.000020] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
2. 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
3. 0.76µm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
4. GOLD PLATING NEED NOT APPEAR IN THIS AREA.
5. REVERSE REELED FOR MINI-APPLICATOR.
6. WIRE RANGE 14-18 AWG.
   INSULATION RANGE 2.79[.110]-3.81[.150].
7. 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
8. 1.27µm [.000050] MIN TIN PER MIL-T-10727 OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
9. 0.38µm [.000015] MIN. GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN. WITH GOLD FLASH ON THE REMINDER, OVER 1.27µm [.000050] MIN. NICKEL PER QQ-N-290.
10. PRELIMINARY - NOT FOR PRODUCTION.
11. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

		BODY FINISH	BODY MATERIAL	LOOSE PIECE REF	PART NUMBER
11 OBSOLETE	9		CU-NI ALLOY	-	10 1-66598-5
	8		BRASS	-	1-66598-4
	8		PHOSPHOR BRONZE	-	1-66598-3
	8		CU-NI ALLOY	1-66601-2	1-66598-2
	3		CU-NI ALLOY	1-66601-0	1-66598-1
	8		BRASS	-	1-66598-0
	8		BRASS	66601-9	66598-9
OBSOLETE	7		BRASS	66601-5	66598-8
	2		BRASS	-	66598-7
	3		PHOSPHOR BRONZE	66601-4	66598-6
11 SUPERSEDED	2		PHOSPHOR BRONZE	66601-3	66598-5
OBSOLETE	1		BRASS	-	66598-3
	3		BRASS	66601-2	66598-2
	2		BRASS	66601-1	66598-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL: SEE CALLOUTS
FINISH: SEE CALLOUTS

DWN M.HOFFECKER 8-11-88
CHK J.McCLINTON 8-11-88
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME: SOCKET ASSEMBLY, .062, TYPE III+

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-66598	-

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 of 1 | REV W3

66598

Downloaded from Elcodis.com electronic components distributor