

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
BD	39	F	0G3B-0317-03	24APR03	TK GS

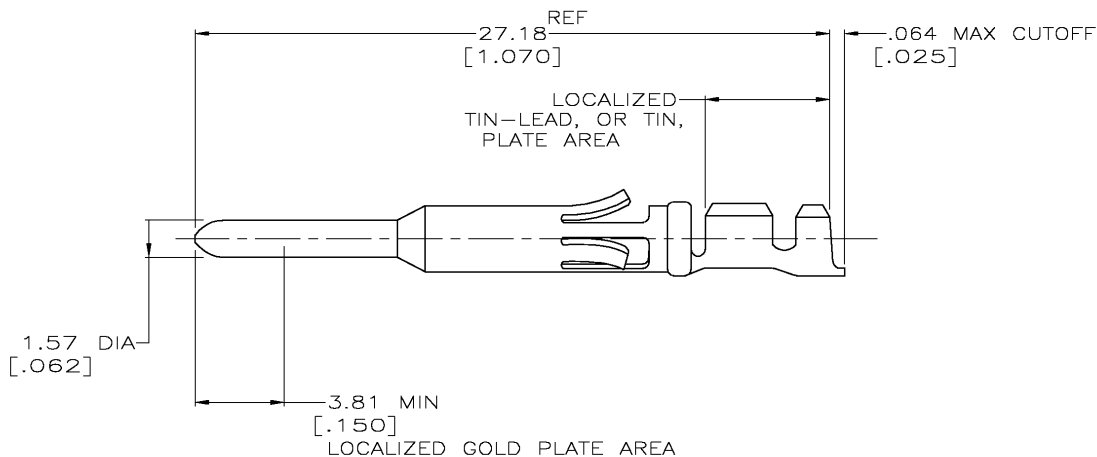

1. WIRE RANGE 18-16 AWG.
2. INSULATION RANGE .100-.080 DIA.
3. FOR STRIP PART SEE DWG 66579.

4 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
 1.27 μm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
 BOTH OVER 1.27 μm [.000050] MIN NICKEL.

5 TIN PLATED.

6 GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727
 AND NICKEL PER QQ-N-290.

7 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
 1.27 μm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
 BOTH OVER 1.27 μm [.000050] MIN NICKEL.

7	66589-4
4	66589-2
5	66589-1
FINISH	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. OBERMAN 08/25/92	Tyco Electronics Corporation Harrisburg, Pa	
DIMENSIONS: INCHES		CHK W.G. LENKER 9-3-92	NAME CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. TRAVIS A. TRAVIS 9-3-92	SIZE A3	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC -	CAGE CODE 00779	DRAWING NO 66589
2 PLC ± 0.13 [.005]	3 PLC ± -	APPLICATION SPEC -	RESTRICTED TO	
4 PLC ± -	ANGLES ± -	WEIGHT -	-	
MATERIAL BRS PER MIL-C-50	FINISH 6 SEE TABLE	CUSTOMER DRAWING	SCALE 6:1	SHEET 1 OF 1
			REV F	

AMP 1470-19 REV 31MAR2000

J:\modsvcs\Tina_EC_dwg\