


3A POWER OPERATIONAL AMPLIFIER

- OUTPUT CURRENT UP TO 3A
- LARGE COMMON-MODE AND DIFFERENTIAL MODE RANGES
- SOA PROTECTION
- THERMAL PROTECTION
- $\pm 18V$ SUPPLY

DESCRIPTION

The L165 is a monolithic integrated circuit in Pentawatt® package, intended for use as power operational amplifier in a wide range of applications, including servo amplifiers and power supplies. The high gain and high output power capability provide superior performance wherever an operational amplifier/power booster combination is required.



Pentawatt V

ORDERING NUMBER: L165V

APPLICATION CIRCUITS

Figure 1. Gain > 10.


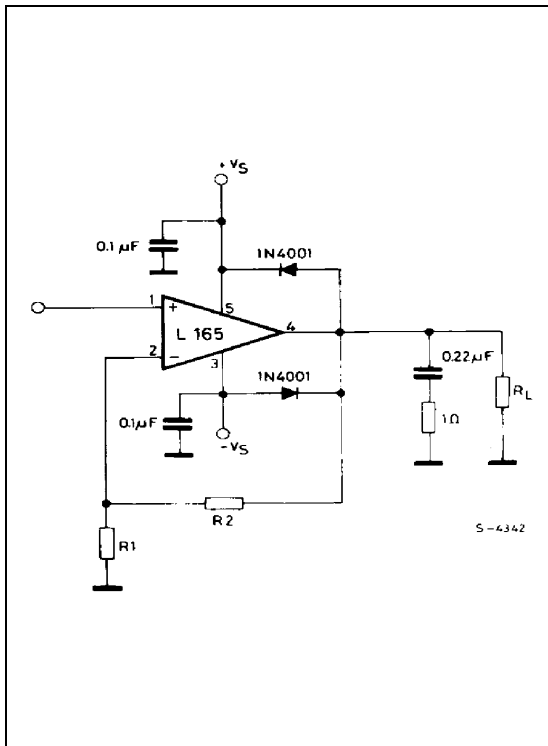



Figure 2. Unity gain configuration.

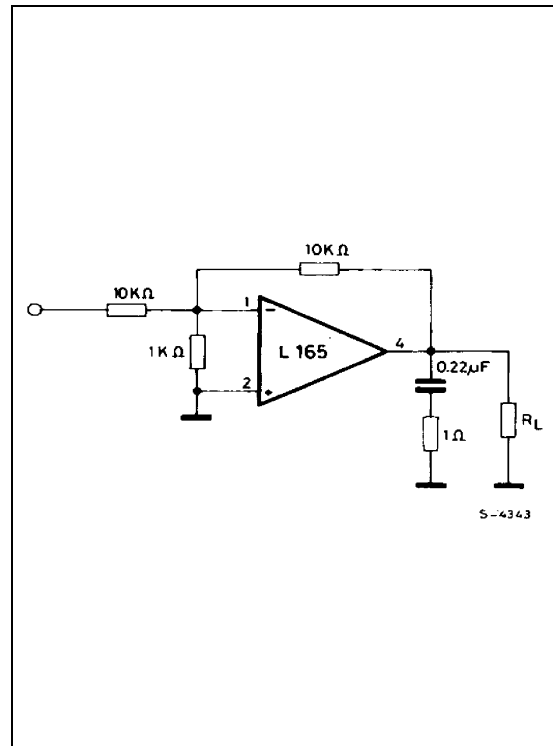


ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|----------------|--|------------|------------|
| V_S | Supply voltage | ± 18 | V |
| $V_5 V_4$ | Upper power transistor V_{CE} | 36 | V |
| $V_4 V_3$ | Lower power transistor V_{CE} | 36 | V |
| V_i | Input voltage | V_S | |
| V_j | Differential input voltage | ± 15 | V |
| I_o | Peak output current (internally limited) | 3.5 | A |
| P_{tot} | Power dissipation at $T_{case} = 90^\circ C$ | 20 | W |
| T_{stg}, T_j | Storage and junction temperature | -40 to 150 | $^\circ C$ |

PIN CONNECTION (Top view)

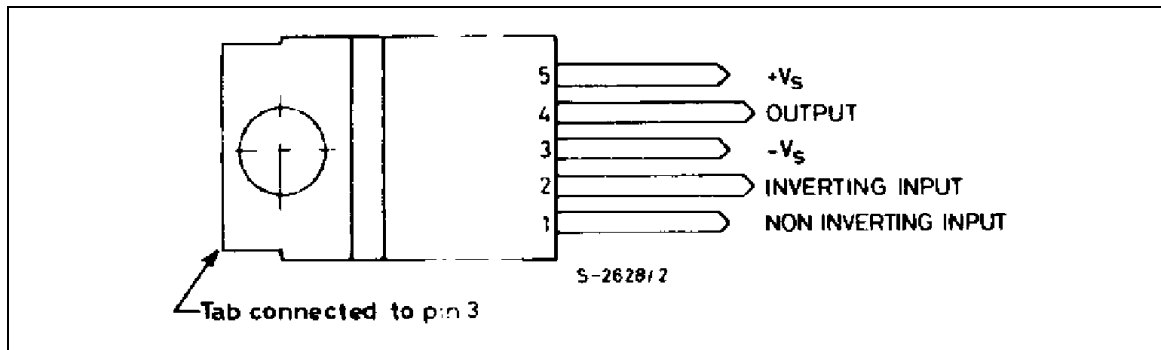

SCHEMATIC DIAGRAM

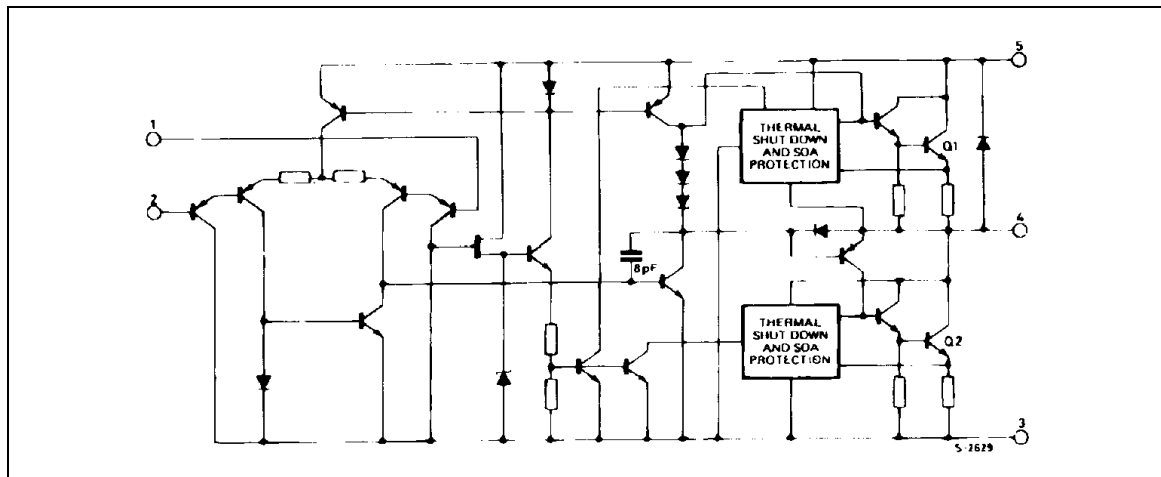

THERMAL DATA

| Symbol | Parameter | Value | Unit |
|-----------------|----------------------------------|-------|--------------|
| $R_{th-j-case}$ | Thermal resistance junction-case | max 3 | $^\circ C/W$ |

ELECTRICAL CHARACTERISTICS ($V_S = \pm 15\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified)

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|----------|--------------------------|---|------------------------------------|--------------------------------|-----------|------------------|
| V_S | Supply Voltage | | ± 6 | | ± 18 | V |
| I_d | Quiescent Drain Current | $V_S = \pm 18\text{ V}$ | | 40 | 60 | mA |
| I_b | Input Bias Current | | | 0.2 | 1 | μA |
| V_{os} | Input Offset Voltage | | | ± 2 | ± 10 | mV |
| I_{os} | Input Offset Current | | | ± 20 | ± 200 | nA |
| SR | Slew-rate | $G_v = 10$ | 8 | | | V/ μs |
| | | $G_v = 1\text{ }^\circ$ | 6 | | | |
| V_o | Output Voltage Swing | $f = 1\text{ kHz}$ $I_p = 0.3\text{ A}$ $I_p = 3\text{ A}$ | | 27 24 | | V_{pp} |
| | | $f = 10\text{ kHz}$ $I_p = 0.3\text{ A}$ $I_p = 3\text{ A}$ | | 27 24 | | V_{pp} |
| R | Input Resistance (pin 1) | $f = 1\text{ KHz}$ | 100 | 500 | | K Ω |
| G_v | Voltage Gain (open loop) | | | 80 | | dB |
| e_N | Input Noise Voltage | B = 10 to 10 000 Hz | | 2 | | μV |
| i_N | Input Noise Current | $f = 1\text{ KHz}$ | | 100 | | pA |
| CMR | Common-mode Rejection | $R_g \leq 10\text{ K}\Omega$; $G_v = 30\text{ dB}$ | | 70 | | dB |
| SVR | Supply Voltage Rejection | $R_g = 22\text{ K}\Omega$; $V_{\text{ripple}} = 0.5\text{ V}_{\text{rms}}$ $f_{\text{ripple}} = 100\text{ Hz}$ $G_v = 10$ $G_v = 100$ | | 60 40 | | dB dB |
| | Efficiency | $f = 1\text{ kHz}$; $R_L = 4\Omega$ $I_p = 1.6\text{ A}$; $P_o = 5\text{ W}$ $I_p = 1.6\text{ A}$; $P_o = 18\text{ W}$ | | 70 60 | | % % |
| T_{sd} | | | Thermal Shut-down Case Temperature | $P_{\text{tot}} = 12\text{ W}$ | | 110 |
| | | $P_{\text{tot}} = 6\text{ W}$ | | 130 | | $^\circ\text{C}$ |

Figure 3. Open loop frequency response.

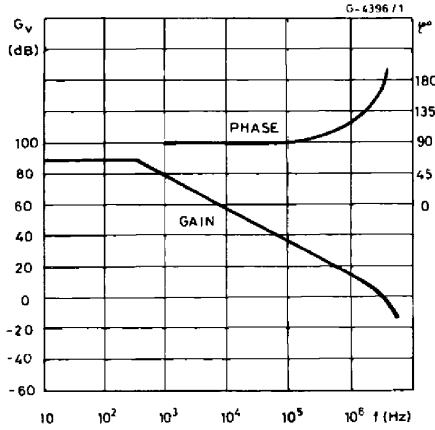


Figure 4. Closed loop frequency response (circuit of figure 2).

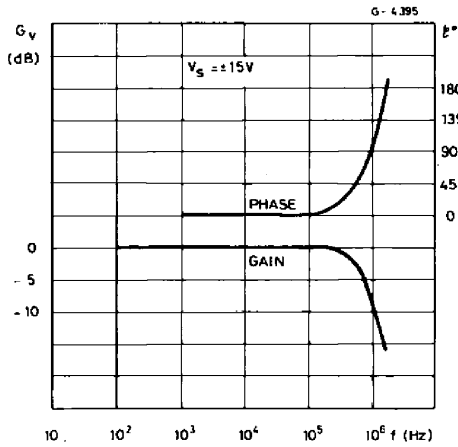


Figure 5. Large signal frequency response.

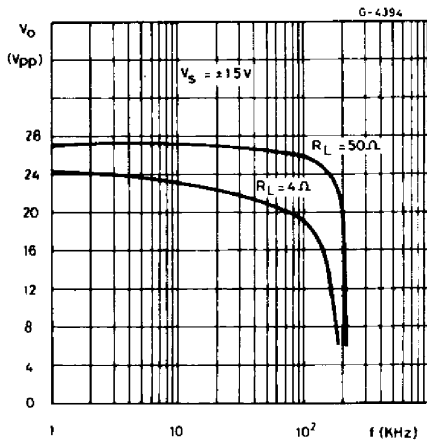


Figure 6. Maximum output current vs. voltage [VCE] across each output transistor.

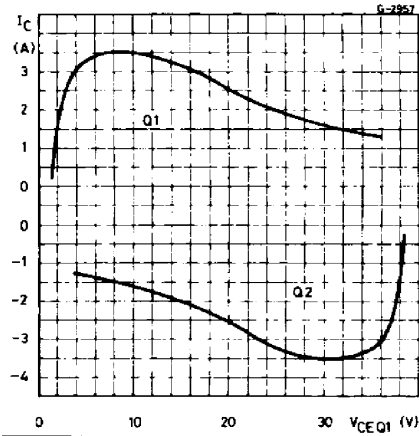


Figure 7. Safe operating area and collector characteristics of the protected power transistor.

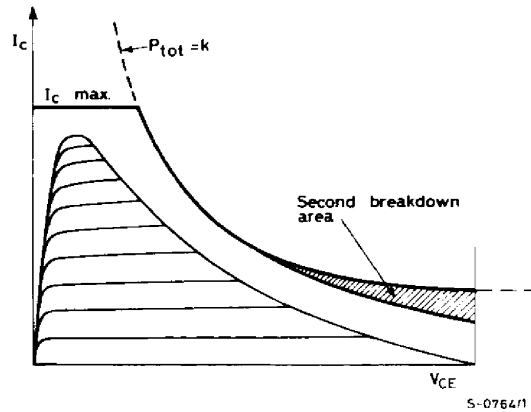


Figure 8. Maximum allowable power dissipation vs. ambient temperature.

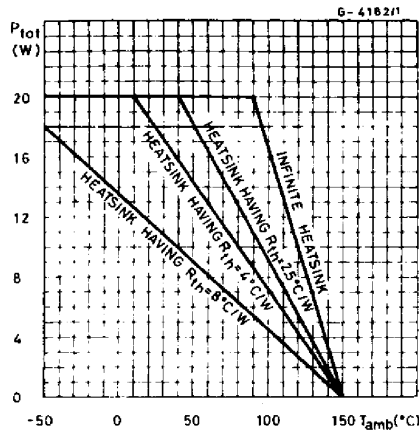


Figure 9. Bidirectional DC motor control with TTL/CMOS/ μ P compatible inputs.

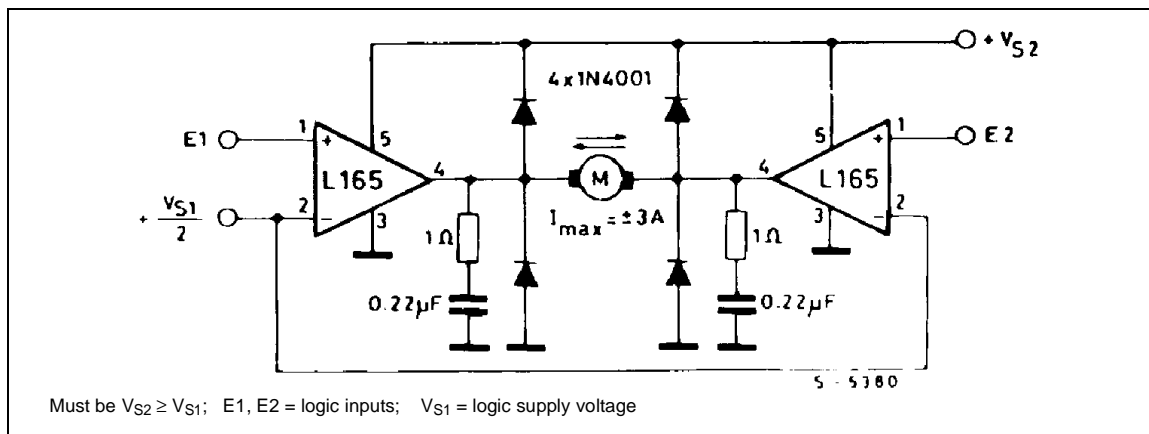


Figure 10. Motor current control circuit with external power transistors ($I_{\text{motor}} > 3.5\text{A}$).

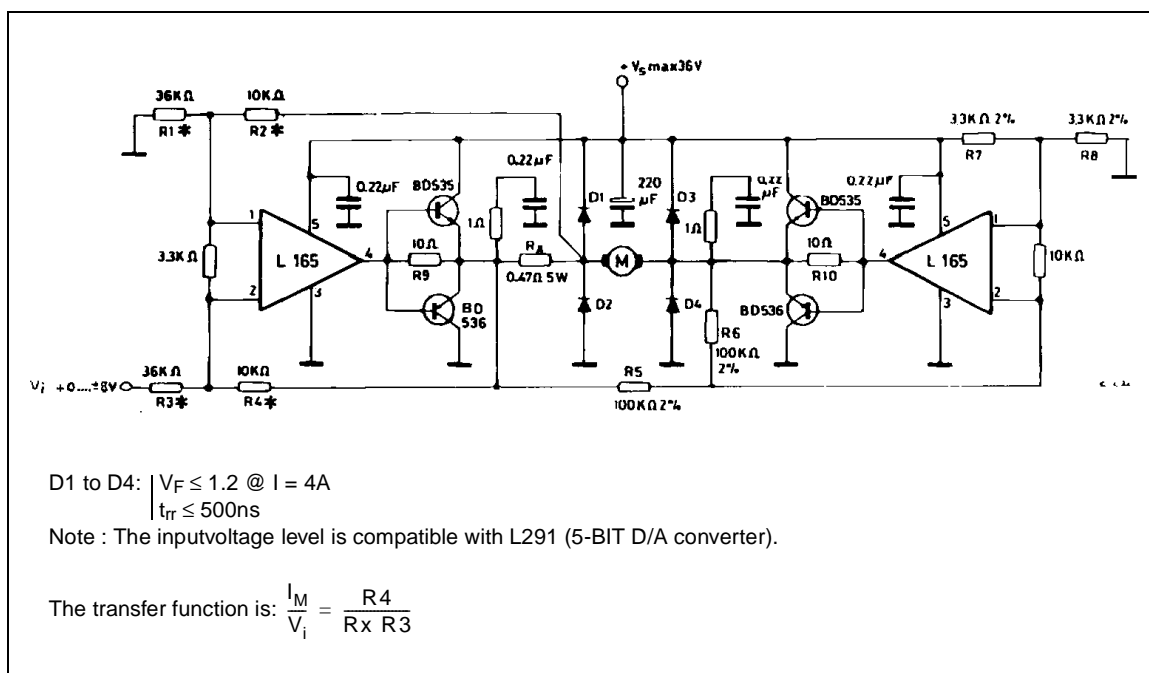


Figure 13. Split power supply.


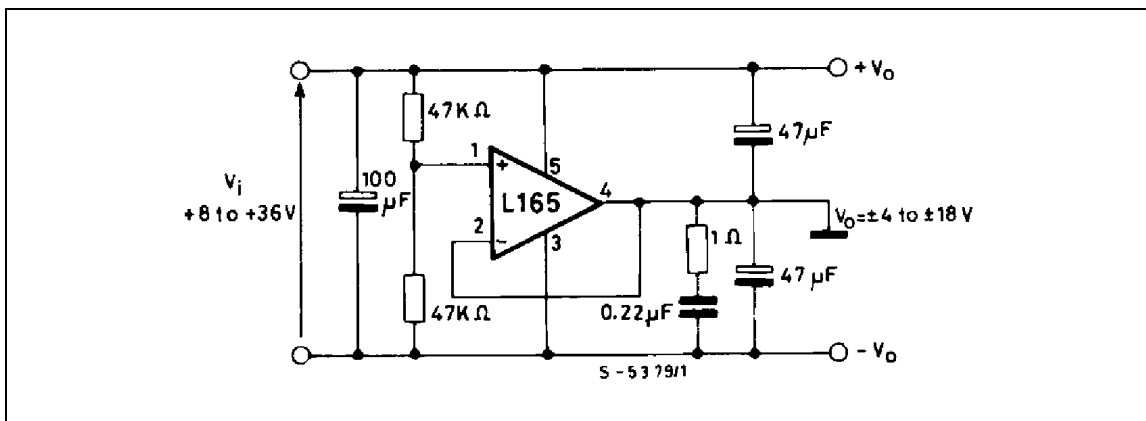


Figure 14. Power squarewave oscillator with independent adjustments for frequency and duty-cycle.

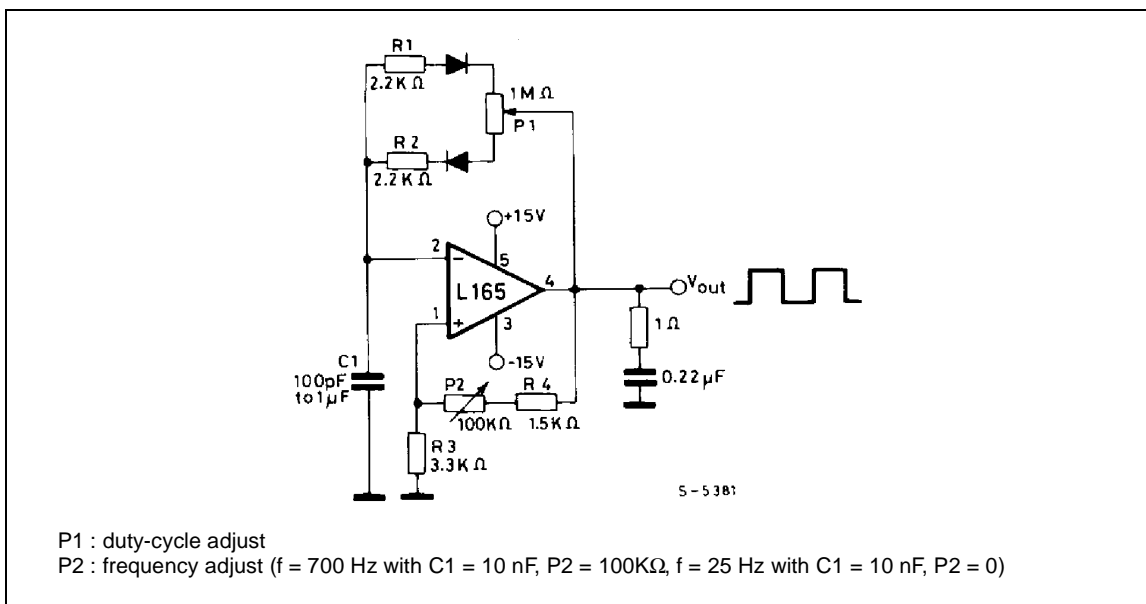

L165


| DIM. | mm | | | inch | | |
|------|------------|-------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | | 4.8 | | | 0.189 |
| C | | | 1.37 | | | 0.054 |
| D | 2.4 | | 2.8 | 0.094 | | 0.110 |
| D1 | 1.2 | | 1.35 | 0.047 | | 0.053 |
| E | 0.35 | | 0.55 | 0.014 | | 0.022 |
| E1 | 0.76 | | 1.19 | 0.030 | | 0.047 |
| F | 0.8 | | 1.05 | 0.031 | | 0.041 |
| F1 | 1.0 | | 1.4 | 0.039 | | 0.055 |
| G | 3.2 | 3.4 | 3.6 | 0.126 | 0.134 | 0.142 |
| G1 | 6.6 | 6.8 | 7.0 | 0.260 | 0.268 | 0.276 |
| H2 | | | 10.4 | | | 0.409 |
| H3 | 10.05 | | 10.4 | 0.396 | | 0.409 |
| L | 17.55 | 17.85 | 18.15 | 0.691 | 0.703 | 0.715 |
| L1 | 15.55 | 15.75 | 15.95 | 0.612 | 0.620 | 0.628 |
| L2 | 21.2 | 21.4 | 21.6 | 0.831 | 0.843 | 0.850 |
| L3 | 22.3 | 22.5 | 22.7 | 0.878 | 0.886 | 0.894 |
| L4 | | | 1.29 | | | 0.051 |
| L5 | 2.6 | | 3.0 | 0.102 | | 0.118 |
| L6 | 15.1 | | 15.8 | 0.594 | | 0.622 |
| L7 | 6.0 | | 6.6 | 0.236 | | 0.260 |
| L9 | 2.1 | | 2.7 | 0.008 | | 0.106 |
| L10 | 4.3 | | 4.8 | 0.17 | | 0.189 |
| M | 4.23 | 4.5 | 4.75 | 0.167 | 0.178 | 0.187 |
| M1 | 3.75 | 4.0 | 4.25 | 0.148 | 0.157 | 0.167 |
| V4 | 40° (typ.) | | | | | |
| V5 | 90° (typ.) | | | | | |
| Dia | 3.65 | | 3.85 | 0.144 | | 0.152 |

OUTLINE AND MECHANICAL DATA

Weight: 2.00gr



Pentawatt V

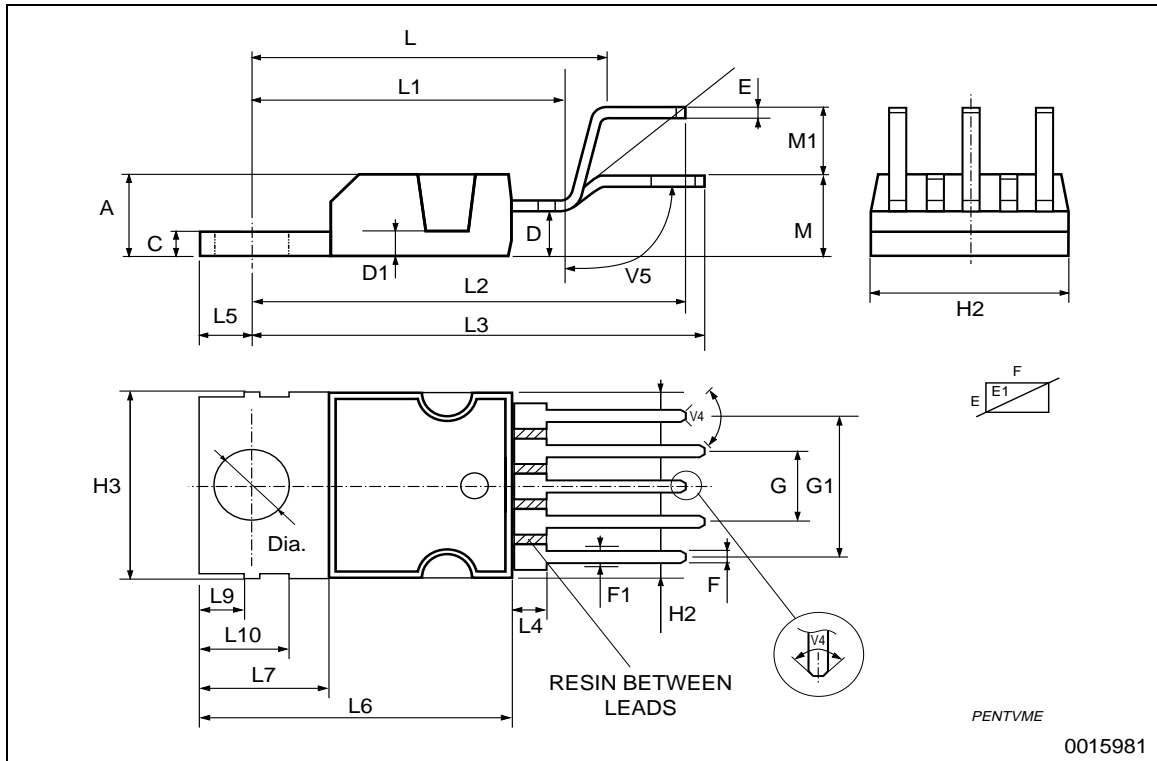

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

STMicroelectronics acknowledges the trademarks of all companies referred to in this document.

The ST logo is a registered trademark of STMicroelectronics
© 2003 STMicroelectronics - All Rights Reserved

STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco -
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.
<http://www.st.com>

