

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
		H	OG3B-0317-03	24APR03	TK GS	
		H1	REVISED PER ECO-09-020689	28AUG09	KK AEG	

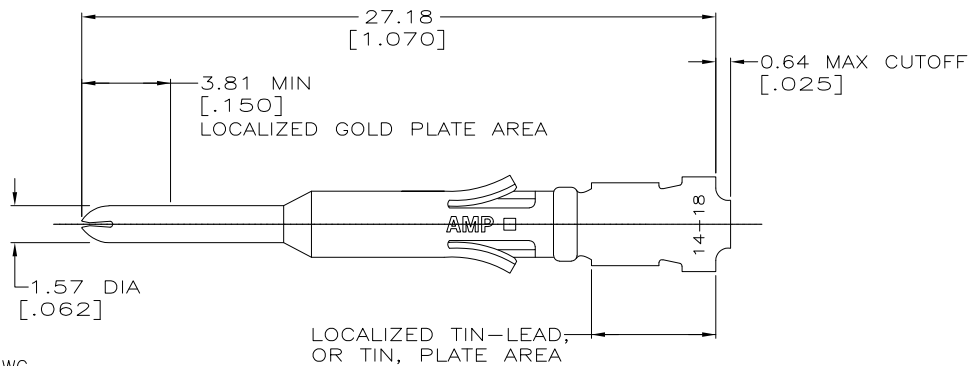

1. WIRE RANGE 18-14 AWG.
2. INSULATION RANGE 2.03-3.43[.080-.135] DIA.
3. 0.76 μ m [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27 μ m [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.
6. 0.76 μ m [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27 μ m [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μ m [.000050] MIN NICKEL.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7	OBSOLETE	66577-7	6	66587-4
		66577-4	3	66587-2
		66577-2	4	66587-1
STRIP REF		FINISH		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES		CHK R.STONE 06/22/94	NAME G.STEINMAUER 06/27/94	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE	
0 PLC ± -		APPLICATION SPEC	SIZE A3	CAGE CODE 00779
1 PLC ± -		WEIGHT	DRAWING NO C-66587	RESTRICTED TO
2 PLC ± 0.13 [005]		CUSTOMER DRAWING		
3 PLC ± -		SCALE 6:1	SHEET 1 OF 1	REV H1
4 PLC ± -				
ANGLES ± -				
MATERIAL BRS PER MIL-C-50	FINISH SEE TABLE			

AMP 1470-19 REV 31MAR2000