


DO NOT SCALE
DIMENSIONS IN mm

METRIC

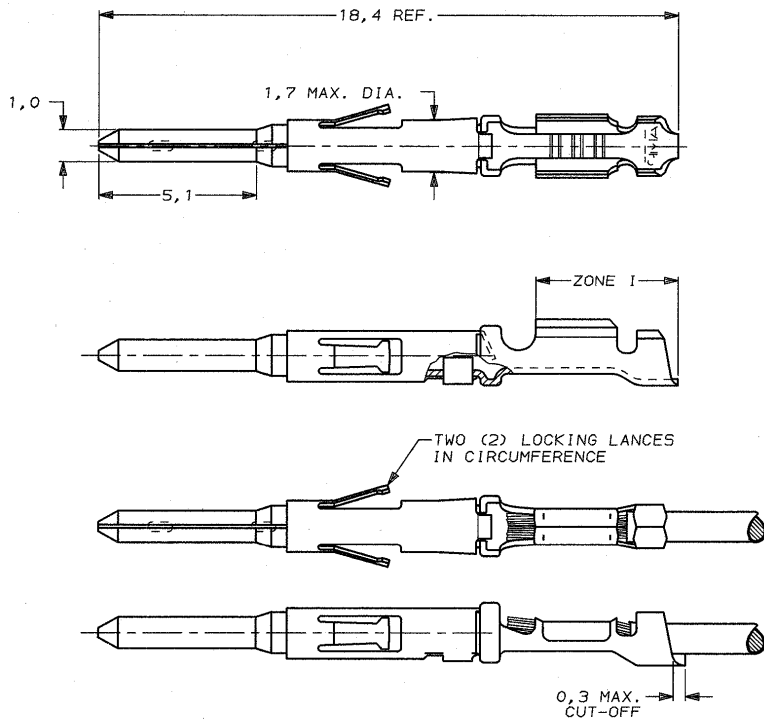

NOTES:

- △ FOR STRIP VERSION SEE DWG. 166047.
- △ UNDERCOATING: 1,3µm Ni.
- SELECTIVE : 0,8µm Au.
- ZONE I : BRIGHT TIN/LEAD PLATED.

WIRE RANGE :
(0,05-0,14mm²) 26-30 AWG
INSULATION RANGE :
1,22 MAX. DIA.

-	-	-	-
-	-	-	-
STAINLESS STEEL	SEE NOTE △	BRASS	166297-1
MATERIAL OF SLEEVE	PLATING OF BODY	MATERIAL OF BODY	PARTNUMBER
-	-	-	-
CUSTOMER DRAWING			FOR REFERENCE ONLY WILL NOT BE UPDATED
© COPYRIGHT 1983 BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION			
AMP			AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.
A	EH-0077-92	JvL CvT	04-03-94
LTR.	REVISION RECORD	DR.	CHK. DATE
DR. : J.v.LIEMPT	CHK. : C.v.TILBURG	APP. : L.v.SOEST	DWG.No. C-166297
DATE: 6 JAN 1983	DATE: 08-02-93	DATE: 08-02-93	REV.LTR. A
			SHEET 1 OF 1