


DO NOT SCALE

DIMENSIONS IN mm

METRIC


THIRD ANGLE
PROJECTION



NOTES:

- ① FOR STRIP VERSION SEE DWG. 164155.
- ② UNDERCOATING: 1,3µm Ni.
SELECTIVE : 0,8µm Au.
ZONE I : BRIGHT TIN/LEAD PLATED.
- ③ UNDERCOATING: 1,3µm Ni.
SELECTIVE : 0,8µm Au.
REMAINDER : GOLDFLASH.

④ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

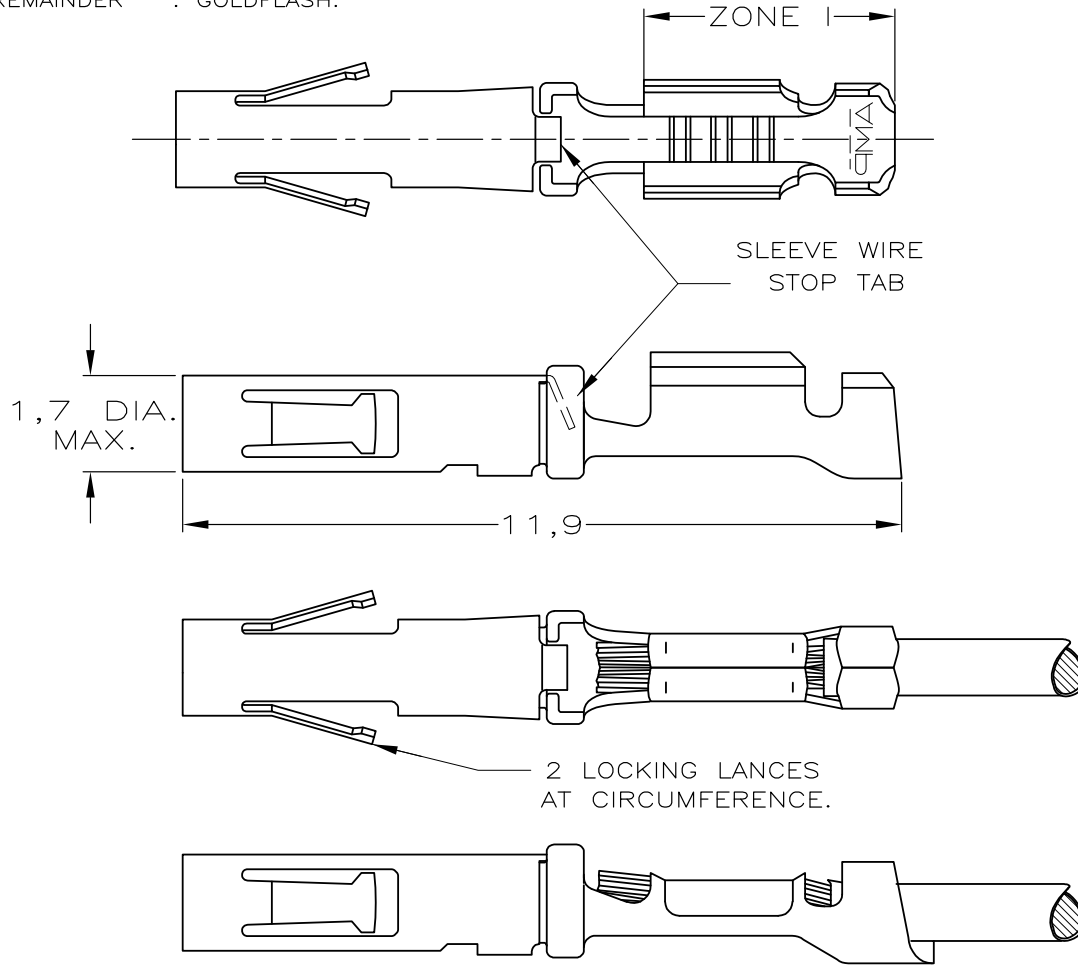

WIRE RANGE :
30-26 AWG 0,05-0,14 mm²
INSULATION RANGE :
1,22 DIA. MAX.

STAINLESS STEEL	SEE NOTE ②	BRASS	164170-4
	PRETINNED		164170-3
	POST TINPLATED		164170-2 ④
	SEE NOTE ③		164170-1
MATERIAL OF SLEEVE	PLATING OF BODY	MATERIAL OF BODY	PARTNUMBER

CUSTOMER DRAWING					FOR REFERENCE ONLY WILL NOT BE UPDATED				
© COPYRIGHT 19 - BY AMP HOLLAND B.V.					ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.				
THIS DRAWING IS UNPUBLISHED					RELEASED FOR PUBLICATION ,19				
AMP					AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.				
E1	REVISED PER ECO-09-020689	KK	AEG	24AUG09	NAME				
E	EH-0077-92	JvL	CvT	04-03-94	HDR SOCKET CONTACT TYPE XI (CRIMP SNAP-IN) L.P.				
LTR.	REVISION RECORD	DR.	CHK.	DATE					
DR.:	J.v.LIEMPT	CHK.:	C.v.TILBURG	APP.:	L.v.SOEST	DWG.No.	164170	REV.LTR.	SHEET
DATE:	6 JAN 1993	DATE:	08-02-93	DATE:	08-02-93			[1	1 OF 1
								A4	