
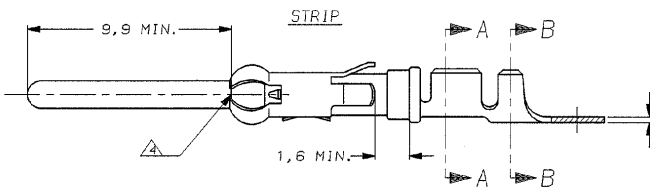
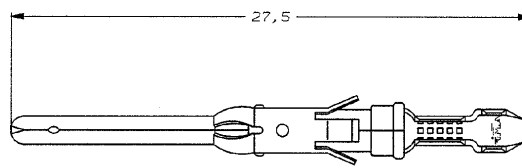


DO NOT SCALE  
DIMENSIONS IN mm



METRIC

THIRD ANGLE  
PROJECTION

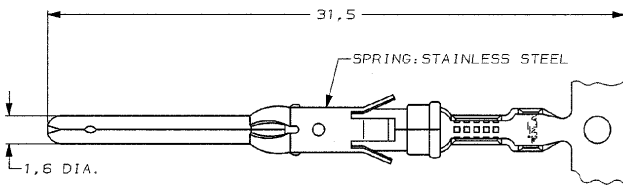

0,32 MATR.  
THICKNESS

COLOR CODE: BLUE



WIRE RANGE : 0,75-1,50 mm<sup>2</sup> (18-16 AWG)  
INSUL. RANGE : 2,0-2,5 mm (.080-.100)

OBsolete	5-163081-3	BRASS	ECON. GOLD
OBsolete	5-163081-2	BRASS	SEL. GOLD
OBsolete	5-163081-1	BRASS	EL. TIN
OBsolete	1-163081-8	BRASS	TIN/LEAD
OBsolete	1-163081-7	BRASS	SILVER
OBsolete	1-163081-6	BRASS	SILVER
	1-163081-5	PH. BRONZE	PRE-TIN
	1-163081-4	PH. BRONZE	PRE-TIN
	1-163081-3	BRASS	PRE-TIN
	1-163081-2	BRASS	PRE-TIN
	1-163081-1	BRASS	ECON. GOLD
	1-163081-0	BRASS	ECON. GOLD
	163081-9	BRASS	EL. TIN
	163081-8	BRASS	EL. TIN
	163081-7	BRASS	SEL. GOLD
	163081-2	BRASS	SEL. GOLD
	163081-1	BRASS	EL. TIN

DIRECTION OFF TOP OF REEL  
AMP HOLLAND B.V. - HET OERSTOF  
107-3-F16.1  
107-3-F16.2  
107-3-F16.4

NOTES	MATERIAL	THICKNESS	AREA
△	TIN	2,0 μm	ALL OVER
△	NICKEL		ALL OVER
△	GOLD	0,8 μm	CONTACT AREA
△	TIN/LEAD		BARREL
△	NICKEL	0,8 μm	ALL OVER
△	GOLD		CONTACT AREA
△	GOLD	1,2 μm	ALL OVER
△	NICKEL		CONTACT AREA
△	SILVER	2,5 μm	ALL OVER
△	TIN/LEAD		BARREL
△	NICKEL	1,5-2,5 μm	ALL OVER
△	SILVER	0,76 μm	ALL OVER
△	SILVER	2,5 μm	ALL OVER
△	NICKEL	1,2 μm	ALL OVER
△	TIN/LEAD	1,2 μm	ALL OVER
△	LUBRICATED		

AW	REVISED PER	ECO	NO.	KK	AEG	11JAN10	FOR REFERENCE ONLY
AW	EBD0-0335-04	JMS	FWK	02-08-04	CUSTOMER DRAWING WILL NOT BE UPDATED		
W	EH-1347-96	JvL	RV	21-11-96	© COPYRIGHT 19- BY AMP HOLLAND B.V.		
V	EH-0302-94	JvL	HvD	03-05-94	ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.		
U	ECN H-9813	JvH	RD	18-05-92	THIS DRAWING IS UNPUBLISHED		
T	ECN H-9192	HvD	RD	09-10-91	RELEASED FOR PUBLICATION		
LTR.	REVISION RECORD	DR.	CHK.	DATE	AMP HOLLAND B.V. s-Hertogenbosch, The Netherlands.		
DR.	DATE	CHK.	DATE	APP.	DATE	DWS.No.	NAME
						163081	PIN TYPE III CONTACT SIZE 16

- NOTES:
- △ U.L. RECOGNIZED UNDER FILE E28476 VOL. VI SEC. 1.
  - 2 FOR CRIMP DETAILS SEE AMP-SPEC. 114-19.000.
  - 3 MEETS PRODUCT SPECIFICATION 108-10042.
  - △ 0,40 MAX. GAP BETWEEN SPRING-NOSE AND CONTACT BODY.
  - △ SPECIAL REEL WITH 200 PCS FOR REEL-FED HANDTOOL.
  - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI