


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROD CODE	LOC	DIST	REVISIONS				DATE	APPD
			ZONE	LTR	DESCRIPTION			
3349	DF	X0						
			E		REV & REDRAWN; 0600-5735-96	CT		
						3-97	JW	

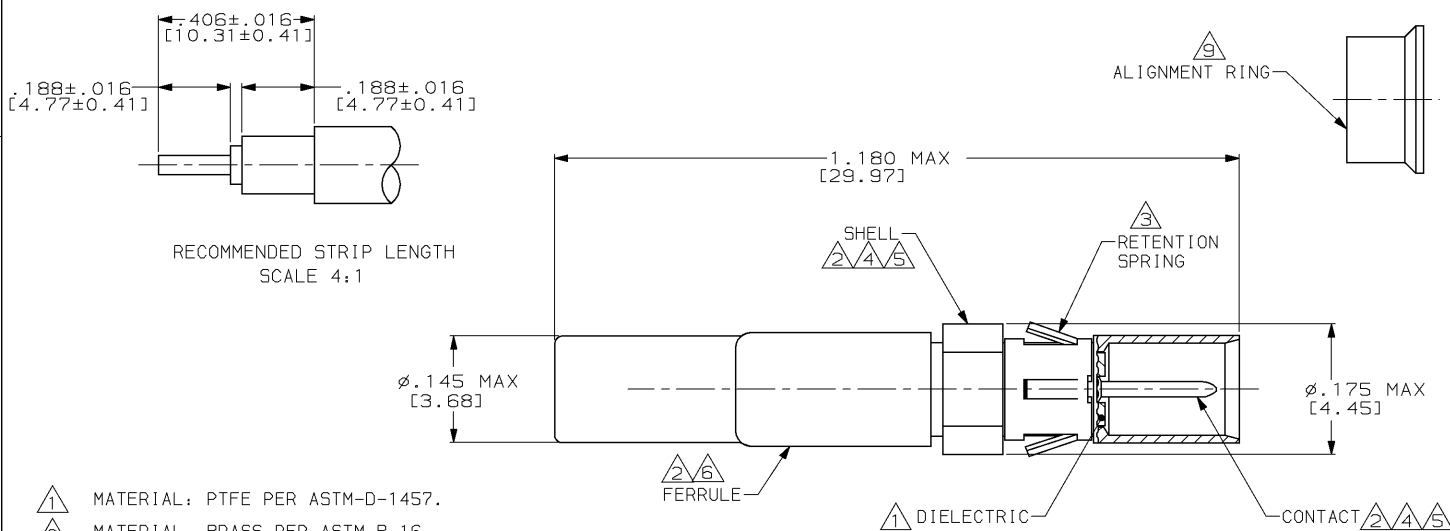

- 1 MATERIAL: PTFE PER ASTM-D-1457.
- 2 MATERIAL: BRASS PER ASTM-B-16.
- 3 MATERIAL: STAINLESS STEEL PER QQ-S-766.
- 4 FINISH: NICKLE PLATE PER QQ-N-290.
- 5 FINISH: DURAGOLD PLATE.
- 6 FINISH: TIN PLATE PER ASTM-B-545.
- 7. FOR USE WITH: RG-178U DBL BRAID, 196/U, MALCO #250-3908-0000 & TENSOLITE #30850/81T-1 CABLE.
- 8. .180 [4.57] MIN DIA HOLE REQUIRED FOR CONTACT TO FEED THROUGH P.C. BOARD.
- 9 ALIGNMENT RING IS USED TO STABILIZE CONTACT IN THE HOUSING CAVITY; OTHERWISE DISCARD.
- 10. SEE I.S. 2923 AND USE CRIMPING TOOL 220215-1.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm]		DR 3-4-87 C.C. THOMAS	227605-1 PART NO	
TOLERANCES ON: 2 PLC DEC ± 3 PLC DEC ± ANGLES ±	MATERIAL 1 2 3	CHK 3-4-87 J. HEAVER	AMP Incorporated Harrisburg, PA 17105-3608	
FINISH 4 5		APPD 3-4-87 J. HEAVER	NAME CONTACT, SOCKET, COAXIAL, MICROMINIATURE	
		RLSE 3-4-87 C.C. THOMAS	SIZE B	CAGE CODE 00779
		PRODUCT SPEC -	DRAWING NO 227605-1	
		APPLICATION SPEC -	SCALE 8:1	SHEET 1 OF 1
		WEIGHT -		

CUSTOMER DRAWING

AMP 1470-15 REV 11-89  
 03-MAR-97 13:53:51 amp1612 /home/amp1612/ndmod