
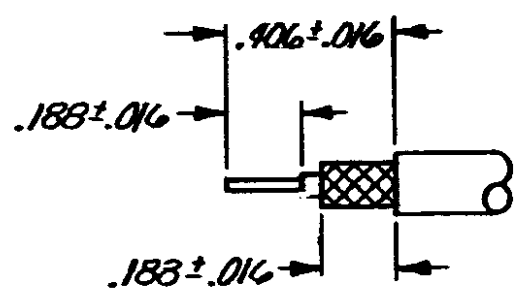


REVISIONS				
P	CTR	DESCRIPTION	DATE	APPROVED
✓	0	NPS 83-3806	2/24/84	TS/DH. SC
✓	A	ADD TO CABLE CALLOUT AJ-392	3-23-84	MS C.C.
✓	B	ADD ALIGNMENT RING PER AJ-3009	3/30/88	DB-1/KJH

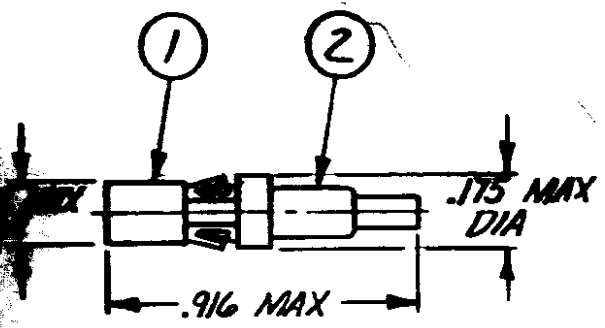

RECOMMENDED STRIP LENGTH

- 1 180 MIN DIA HOLE REQUIRED FOR CONTACT TO FEED THROUGH PRINTED CIRCUIT BOARD.
- 2 SEE 3 2923
- 3 FOR USE WITH: GORE TEX CXN 1644, RG-179/U, 179A/U, 179B/U, & 187/U CABLE.
- 4 USE CRIMPING TOOL 220215-2
- 5 ITEM 3 IS USED TO STABILIZE CONTACT IN THE HOUSING CAVITY; OTHERWISE DISCARD.

ITEM	QTY	DESCRIPTION	PART NO
3	1	RING, ALIGNMENT	222000-1
2	1	FERRULE	228538-3
1	1	SOCKET ASSY	227623-2

APPROVED DR T. Smith 2/24/84 CRK D.S. Hende 2/24/84 APPD J. Cohen 2-22-84 APPD W. K. Kest 2/24/84 DSGN APPD OTHER APPD T. Smith 2/24/84	AMP AMP INCORPORATED Harrisburg, Pa. 17105		
	NAME CONNECTOR, COAXIAL, MULTIPLE, SOCKET, CONTACT, MICROMINIATURE		
	SIZE A	FSCM NO 00779	DRAWING NO 227605-4
	SCALE NTS	SHEET _____	