

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR FULFILLMENT OF CONTRACT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REVISONS		DATE	BY	APP'D
P	LTR			
L	REVISED PER ECO-08-007327	27JAN2009	ZMR	WLM

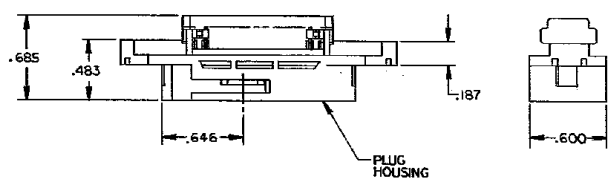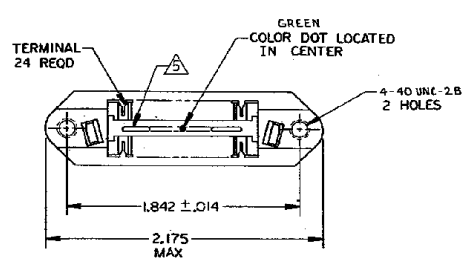

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
 2. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
 3. MATERIAL:
HOUSING - THERMOPLASTIC (BLACK)
TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
 4. WIRE SIZE: 22 AWG SOLID OR 22 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
- NOTE: CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

AS SHOWN	552301-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN	A. HOLT	12-18-79	Tyco Electronics Corporation Harrisburg, PA 17105-3608
		DR	M.D. FRIEL	12-28-79	
		APPR	B.G. WARD	12-28-79	PLUG ASSY, 24 POSITIONS, C SLOT W/ 4-40 HOLES, CHAMP-LOK
		CHK			
		PRODUCT SPEC			SIZE
		APPLICATION SPEC			
		WEIGHT			DWG NO
					00779
					C=552301
					RESTRICTED TO
					CUSTOMER DRAWING
					SCALE
					NTS
					SHEET
					1 of 1
					REV
					L

AMP 1471-B REV 31MFP000

552301

A