

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
GP	00	P	LR	DATE
		K	REVISED PER ECO-08-007327	14OCT08
				BM WM

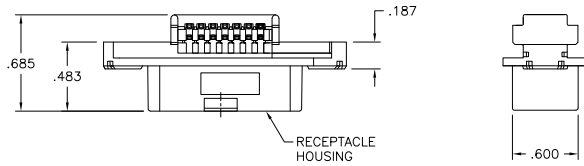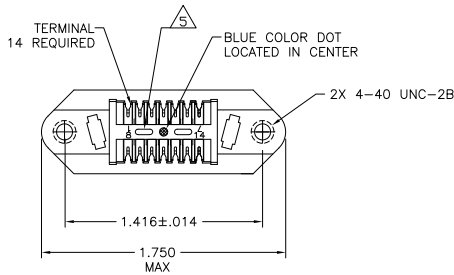

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.

△ MATERIAL:
 HOUSING - THERMOPLASTIC (BLACK)
 TERMINALS: - HIGH STRENGTH COPPER ALLOY PLATED WITH .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE .000030 MIN TOTAL ON MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.

4. WIRE SIZE: 24 & 26 AWG SOLID & 24 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.

△ CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

552312-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR. S. MCMASTER	05OCT05	Tyco Electronics Corporation	
		CR. W. MILLHIMES	05OCT05	Harrisburg, PA 17105-3608	
		APP. W. MILLHIMES	05OCT05	NAME	
		PRODUCT SPEC		ASSEMBLY, RECEPTACLE	
		APPLICATION SPEC		14 POSITION, B SLOT	
		WEIGHT		CHAMP-LOK W/ 4-40 HOLES	
		CUSTOMER DRAWING		SIZE	A2
				CAGE CODE	00779
				FINISH	C=552312
				RESTRICTED TO	
				SCALE	NTS
				SHEET	1 of 1
				REV	K