

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR REPRODUCTION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV. NO.		DATE		DESCRIPTION	
GP	00				
J		27 JAN 2009		REVISED PER ECO-08-007327	ZMR/WLM

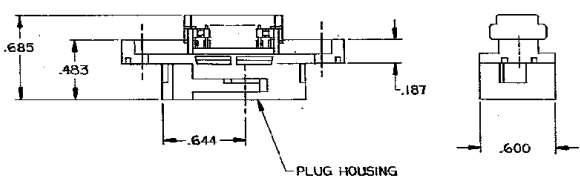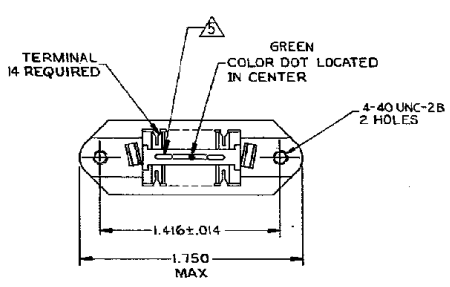

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
 2. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
 3. MATERIAL:
 - HOUSING - THERMOPLASTIC (BLACK)
 - TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
 4. WIRE SIZE: 22 AWG SOLID OR 22 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
- NOTE: CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

AS SHOWN	552300-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN	12-17-79	 Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS		A. HOLT	12-17-79				
INCHES		V.E. SLACK	12-17-79				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		B.G. WARD	12-17-79				
0 PLC	#	PRODUCT SPEC		PLUG ASSY, 14 POSITIONS, C SLOT W/ 4-40 HOLES, CHAMP-LOK			
1 PLC	#	APPLICATION SPEC					
2 PLC	#						
4 PLC	#						
MATERIAL		WEIGHT		SIZE	DWG CODE	DRAWING NO	RESTRICTED TO
				A2	00779	552300	
		CUSTOMER DRAWING		SCALE	NTS	SHEET	1 of 1

552300