

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR FULFILLMENT OF CONTRACT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REVISONS		DATE	BY	APPD
P	LTR			
K		27JAN2009	ZMR	WLM

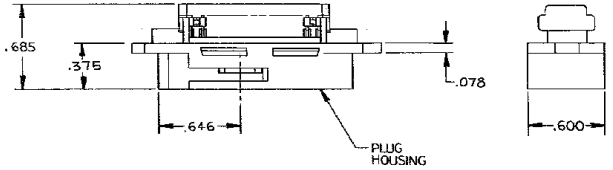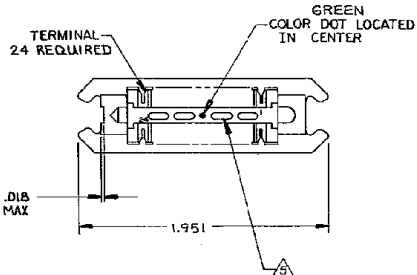

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
 - ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
 - MATERIAL:
 - HOUSING - THERMOPLASTIC (BLACK)
 - TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL, ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
 4. WIRE SIZE: 22 AWG SOLID OR 22 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
- ⚠ CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

AS SHOWN	552317-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN	T. SHELTON	8-4-82	Tyco Electronics Corporation Harrisburg, PA 17105-3608
		DR	C. BOWMAN	10-29-82	
		APPD	S. HEGER	10-29-82	PLUG ASSY, 24 POSITIONS, C SLOT BAIL LOCK, CHAMP-LOK
		PRODUCT SPEC			
		APPLICATION SPEC			SIZE A2 DICE CODE 00779 DRAWING NO C=552317
		RESTRICTED TO			
MATERIAL		WEIGHT			CUSTOMER DRAWING
FINISH		SCALE	NTS	SHEET 1 of 1	REV K

AMP 1471-B REV 31MFP000

552317