


1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
 2. MATERIAL:
 HOUSING - THERMOPLASTIC (BLACK)
 TERMINALS - BERYLLIUM COPPER PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL, ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
 3. WIRE SIZE: 22 AWG SOLID OR 22 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
 4. CENTER-TO-CENTER SPACING OF TERMINALS IS .085 REF.
5. CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

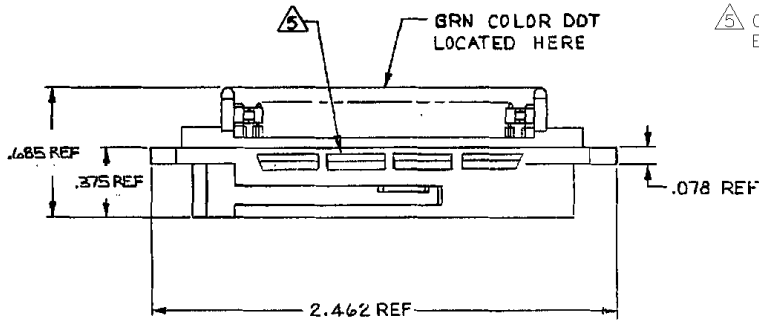

AS SHOWN	552318-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	SANDY LITTLE	6-23-77	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: INCHES		DRW	R. REICH	8-24-77	NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S. HEGE	4-28-78	PLUG ASSY. 36 POSITIONS, C SLOT BAIL LOCK, CHAMP-LOK		
0 PLC ± -		PRODUCT SPEC			SIZE	CAGE CODE	DRAWING NO
1 PLC ± -		APPLICATION SPEC			A3	00779	C=552318
2 PLC ± -		WEIGHT			RESTRICTED TO		
3 PLC ± -						CUSTOMER DRAWING	
4 PLC ± -						SCALE	SHEET
ANGLES ± -						NTS	1 OF 1
MATERIAL	FINISH					REV H	