

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
F	LNK	DATE	MIN	APD	DESCRIPTION		
GP	00	J			REVISED PER ECO-08-007327	26JAN2009	ZMR/WLM

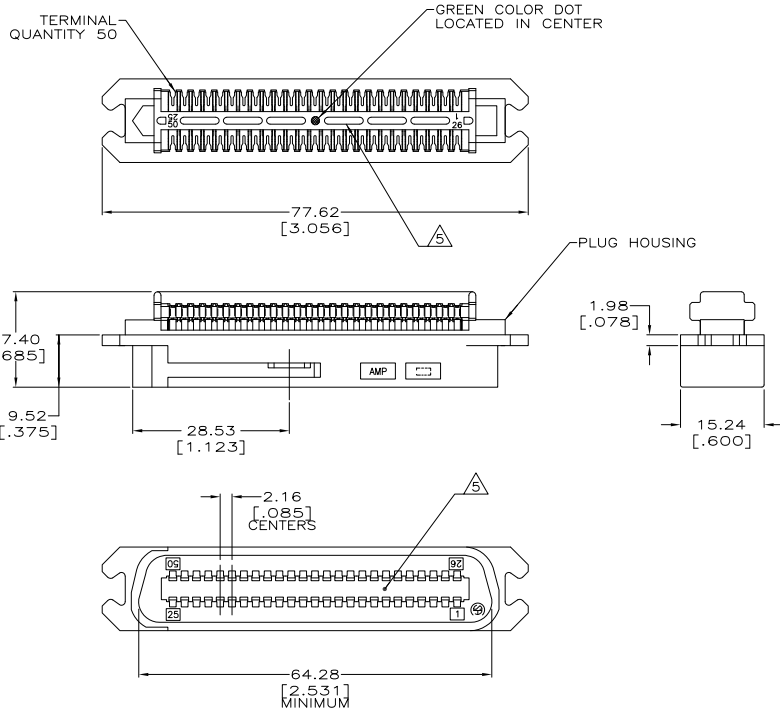

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- △ MATERIAL:  
 HOUSING - POLYPHENYLENE OXIDE, BLACK  
 TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER 0.76μm [.000030] MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL 0.76μm [.000030] MIN TOTAL, ON CONTACT MATING SURFACE. 1.27μm [.000050] MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
- △ ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
4. WIRE SIZE: 22 AWG SOLID OR 22 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION Ø1.14 [.045] IS ACCEPTABLE FOR MOST APPLICATIONS.
- △ CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

AS SHOWN	552319-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DW DL DELUMMOND 01JAN01	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		DL DL DELUMMOND 01JAN01	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APD DL DELUMMOND 01JAN01	PRODUCT SPEC	
0 PLC	±	APPLICATION SPEC		
1 PLC	±	WEIGHT		
2 PLC	±	SIZE		
3 PLC	±	CAGE CODE		
4 PLC	±	DRAWING NO.		
ANGLES	±	RESTRICTED TO		
FINISH	±	CUSTOMER DRAWING		
		A2 00779 C-552319		SCALE 2:1 SHEET 1 of 1 REV J

AMP 1471-9 REV 31MAR2000

552319

A