

4



3

2






1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
F	LR	DESCRIPTION	DATE	BY	APP'D		
0		RELEASED PER EC 0513-0556-04	28JUL05	JG	SS		

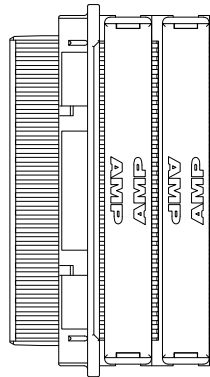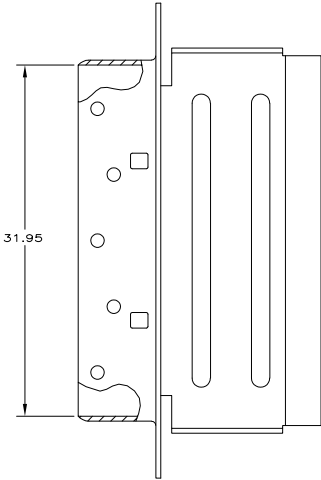

- ⚠ CONTACTS: PHOSPHOR BRONZE.
SHELL: CARBON STEEL.
HOUSING: LCP, UL94V-0 RATED, COLOR NATURAL.
COVERS: LCP, UL94V-0 RATED, COLOR BLACK.
- ⚠ CONTACTS: 0.76μm MINIMUM GOLD PLATE IN LOCALIZED GOLD PLATE AREA, 1.27μm MINIMUM TIN PLATE IN TERMINATION AREA, ALL OVER 1.27μm MINIMUM NICKEL.
SHELL: 5.08μm MINIMUM NICKEL OVER 1.27μm MINIMUM COPPER.
- ⚠ TERMINATION COVERS AND PLUG SHELL ARE PACKAGED UNASSEMBLED.
- 4. RECOMMENDED WIRE: 30 AWG WITH A 0.56-0.64 INSULATION DIAMETER. WIRE MUST BE APPROVED BY TYCO ELECTRONICS ENGINEERING.

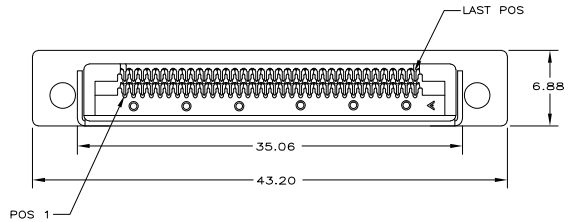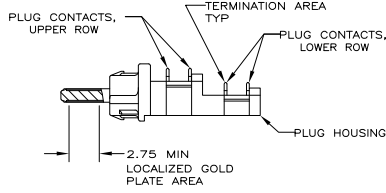

5787775-1
PART NUMBER

**COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: J GERACE 28JUL05 CHK: S SHUEY 28JUL05 APP'D: M WALMSLEY 28JUL05 PRODUCT SPEC: 108-1471 APPLICATION SPEC: - WEIGHT: - FINISH: -	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608	PLUG KIT, UNASSEMBLED, 68 POS, OFFSET CABLE CONNECTOR, CHAMP 0.8MM	SIZE: A2 CASE CODE: 00779 DRAWING NO: C=5787775	RESTRICTED TO: - SCALE: 4:1 SHEET: 1 OF 1 REV: 0
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P.L.C. ± - 1 P.L.C. ± - 2 P.L.C. ± 0.13 3 P.L.C. ± - 4 P.L.C. ± - ANGLES ± - FINISH: -				
MATERIAL: ⚠		CUSTOMER DRAWING				

AMP 1471-9 REV 31MMR2000

5787775

A