


DESCRIPTION: .085" RIBBON DIP SOLDER

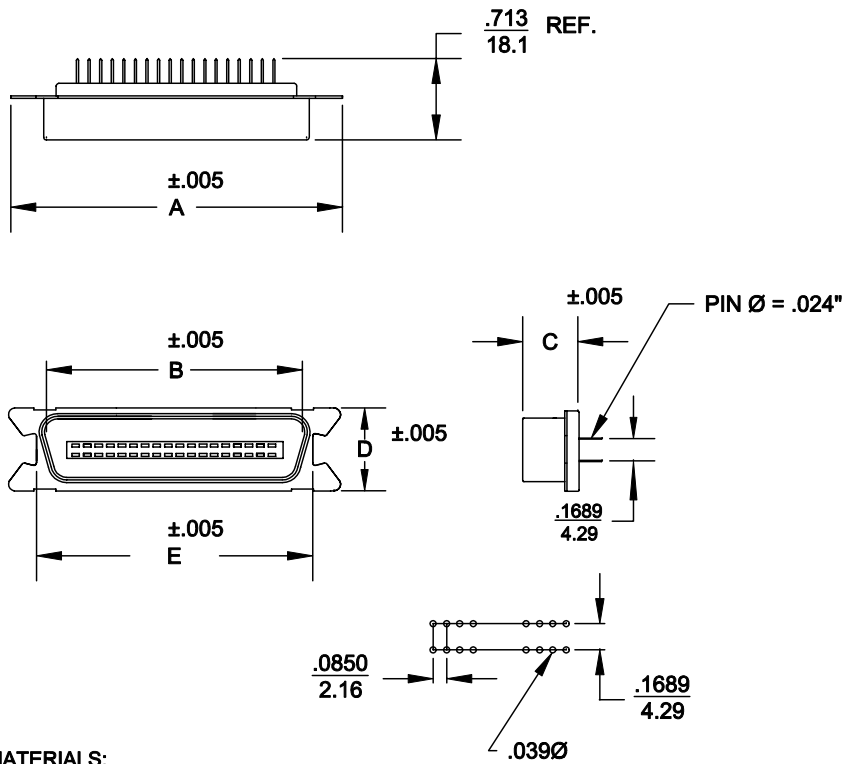

	A	B	C	D	E
14	1.729	.992	.502	.602	1.417
	43.92	25.20	12.75	15.20	35.99
24	2.154	1.417	.502	.602	1.843
	54.71	36.00	12.75	15.20	46.79
36	2.665	1.925	.502	.602	2.352
	67.69	48.90	12.75	15.20	59.74
50	3.047	2.538	.502	.602	2.689
	77.40	64.47	12.75	15.20	68.30

111-XXX-113-101

SERIES _____

POSITIONS _____

014 _____

024 _____

036 _____

050 _____

GENDER _____

1 = MALE

TERMINATION _____

1 = DIP SOLDER

SHELL PLATING _____

3 = NICKEL

HARDWARE OPTIONS _____


10 = BAIL LATCH RECEPTACLE

PLATING OPTIONS _____

01 = GOLD FLASH

MATERIALS:

INSULATOR: GLASS-FILLED THERMOPLASTIC
 UL RATED 94V-0
 CONTACTS: COPPER ALLOY
 ELECTRICALS:
 CONTACT CURRENT RATING: 5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.
 INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC
 CONTACT RESISTANCE: 30 mOHMS MAXIMUM
 OPERATING TEMPERATURE: -55°C TO +125°C

 NorComp	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: WAYNE ROBBINS	DATE: 9-21-98
	SCALE: 1:1	SHEET 1 OF 1	REV 3