

DESCRIPTION: 0.085 RIBBON - DIP SOLDER

36 PIN  
SHOWN



	014	024	036	050
A	1.728 43.90	2.154 54.70	2.667 67.75	3.272 83.10
B	1.417 36.00	1.843 46.80	2.352 59.74	2.947 74.85
C	1.004 25.50	1.429 36.30	1.929 49.00	2.538 64.47
D	0.689 17.50	1.102 28.00	1.634 41.50	2.207 56.05

**MATERIAL:**

INSULATION: PBT - UL 94V-0 RATED  
CONTACTS: PHOSPHOR BRONZE  
SHELL: STEEL, NICKEL PLATED


**ELECTRICAL:**

CURRENT RATING: 1 AMPS  
VOLTAGE RATING: 1,000V AC r.m.s.  
INSULATION RESISTANCE: 1,000MegOhms Min. @ 500VDC  
CONTACT RESISTANCE: 30MilliOhms Max.  
OPERATING TEMPERATURE: -55°C TO +125°C

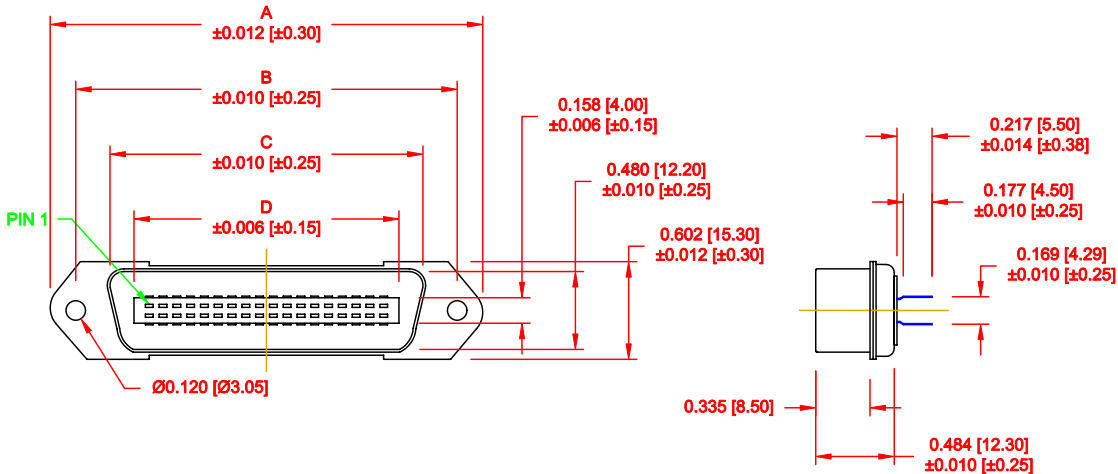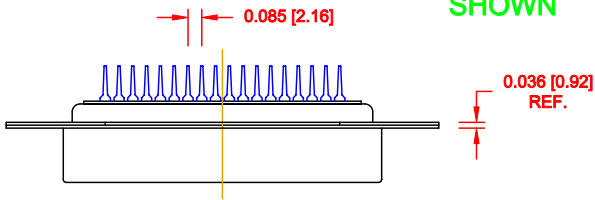

111-YYY-1 1 3 L 00 1

- SERIES
- POSITIONS
- 014
- 024
- 036
- 050
- GENDER
- 1 = MALE
- TERMINATION
- 1 = DIP SOLDER
- RoHS COMPLIANT
- L = LOW TEMP. PROCESS
- SHELL PLATING
- 3 = NICKEL
- HARDWARE
- 00 = NO HARDWARE
- PLATING
- 1 = GOLD FLASH

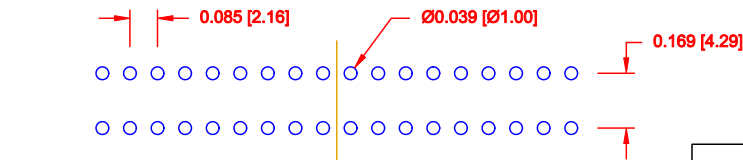

RECOMMENDED PCB LAYOUT

SCALE = 2 : 1

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>WAYNE ROBBINS</b>	DATE: <b>09-21-98</b>
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: <b>1 : 1</b>	SHEET <b>1</b> OF <b>1</b>	REV <b>6</b>
		DWG NO. <b>111-YYY-113L001</b>		