


DESCRIPTION: MALE CENTRONICS BACKSHELL KIT

- BACKSHELL KIT INCLUDES:**
 (1) SOLDER CUP CONNECTOR
 (1) BACKSHELL WITH STRAIN RELIEF, (2) SCREWS
 (1) FACE PLATE
 (1) RUBBER GROMMET

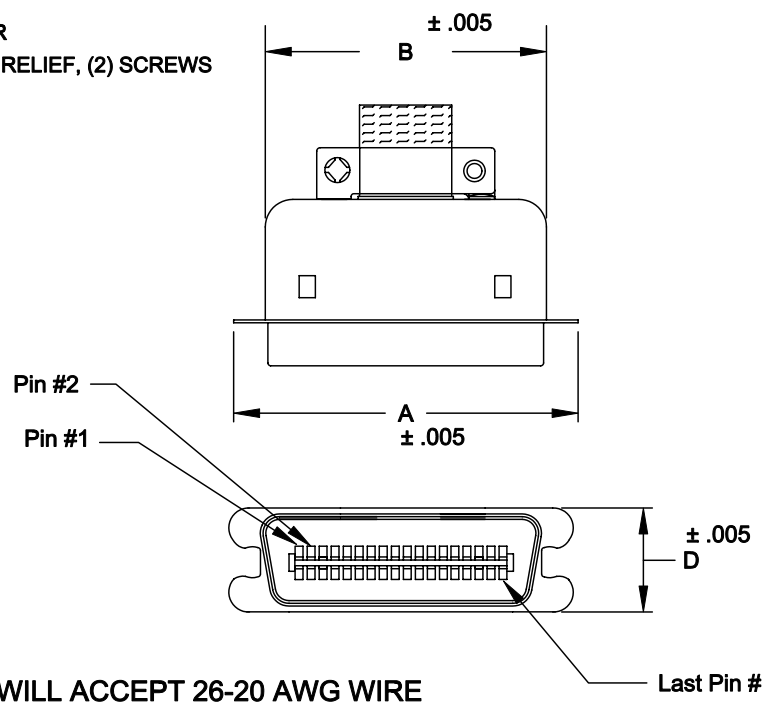


WILL ACCEPT 26-20 AWG WIRE

- 110-YYY-103L001**
- SERIES** _____
POSITIONS _____
 014 _____
 024 - NOT AVAILABLE _____
 036 _____
 050 _____
GENDER _____
 1 = MALE _____
 2 = FEMALE _____
TERMINATION _____
 0 = SOLDER CUP _____
SHELL PLATING _____
 3 = NICKEL _____
HARDWARE OPTIONS _____
 00 = NOT AVAILABLE _____
PLATING OPTIONS _____
 1 = GOLD FLASH _____

	A	B	C	D
014	1.496	1.132	1.572	.622
	38.00	29.75	40.06	15.80
024	1.919	1.593	1.560	.622
	48.75	40.45	39.61	15.80
036	2.431	2.090	1.624	.622
	61.76	53.10	41.25	15.80
050	3.026	2.677	1.730	.622
	76.86	68.00	43.95	15.80

- MATERIALS:**
 INSULATOR: GLASS-FILLED THERMOPLASTIC
 UL RATED 94V-0 - 230°C PROCESS TEMP.
 CONTACTS: COPPER ALLOY
 SHELL: STEEL, NICKEL PLATED
 RoHS COMPLIANT
- ELECTRICALS:**
 CONTACT CURRENT RATING: 5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.
 INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC
 CONTACT RESISTANCE: 30 mOHMS MAXIMUM
 OPERATING TEMPERATURE: -55°C TO +125°C

 NorComp	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: WAYNE ROBBINS CHECKED: _____ SCALE: 1:1 DWG NO. 110-YYY-103L001	DATE: 7-15-05 DATE: _____ SHEET 1 OF 1 REV 3
---	---	---	---