

DESCRIPTION: FEMALE CENTRONICS BACKSHELL KIT

- BACKSHELL KIT INCLUDES:**
- (1) SOLDER CUP CONNECTOR
 - (1) BACKSHELL WITH STRAIN RELIEF, (2) SCREWS
 - (2) ASSEMBLY SCREWS
 - (2) SPRING LATCHES
 - (1) RUBBER GROMMET

WILL ACCEPT 26-20 AWG WIRE

SERIES 110-YYY-203L001

POSITIONS _____

014 _____

024 - NOT AVAILABLE _____

036 _____

050 _____

GENDER _____

1 = MALE _____

2 = FEMALE _____

TERMINATION: _____

0 = SOLDER CUP _____

SHELL PLATING _____


3 = NICKEL _____

HARDWARE OPTIONS: _____

00 = NOT AVAILABLE _____

PLATING OPTIONS _____

1 = GOLD FLASH _____

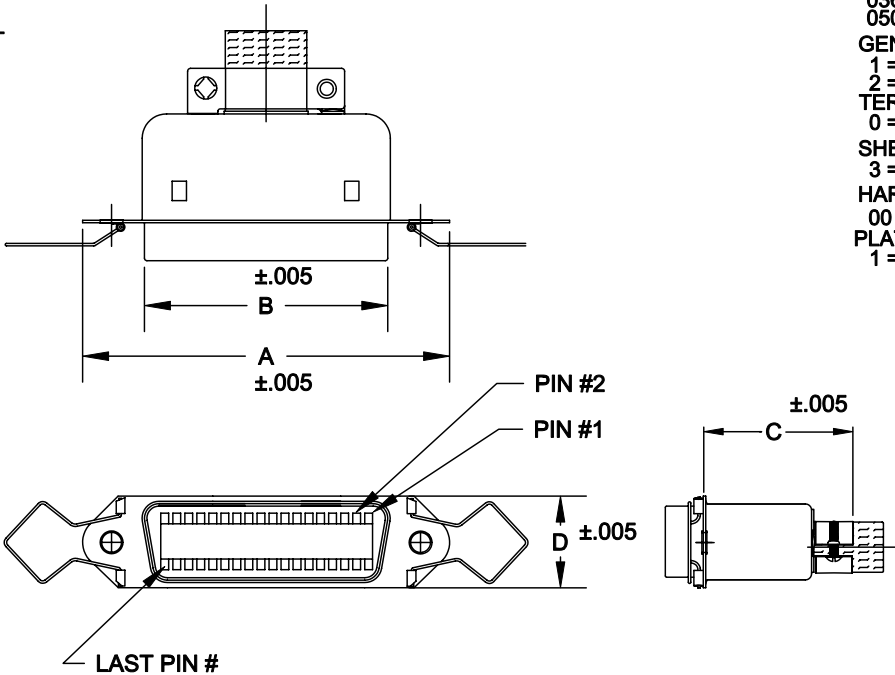

	A	B	C	D
14	1.729	.992	1.252	.622
	43.92	25.20	31.79	15.80
24	2.167	1.417	1.225	.622
	55.05	36.00	31.11	15.80
36	2.669	1.925	1.295	.622
	67.80	48.90	32.90	15.80
50	3.260	2.519	1.407	.622
	82.80	64.00	35.75	15.80


MATERIALS:

INSULATOR: GLASS-FILLED THERMOPLASTIC
 UL RATED 94V-0 - 230°C PROCESS TEMP.
 CONTACTS: COPPER ALLOY
 SHELL: STEEL, NICKEL PLATED

RoHS COMPLIANT

ELECTRICALS:

CONTACT CURRENT RATING: 5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.
 INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC
 CONTACT RESISTANCE: 30 mOHMS MAXIMUM
 OPERATING TEMPERATURE: -55°C TO +125°C

 NorComp	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 7-15-05
			CHECKED:	DATE:
	SCALE: 1:1	SHEET 1	OF 1	REV 3
			DWG NO. 110-YYY-203L001	