

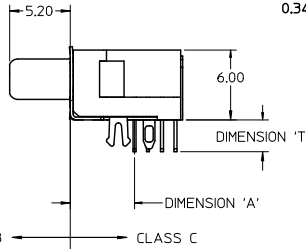
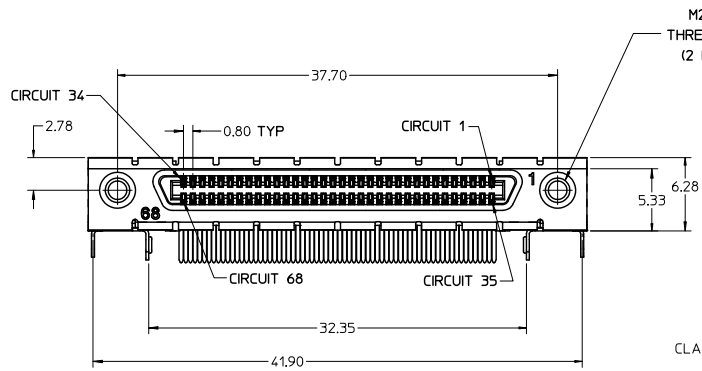



13 12 11 10 9 8 7 6 5 4 3 2 1

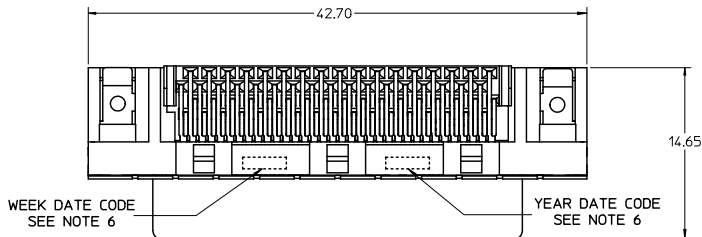

SEE NOTE 7

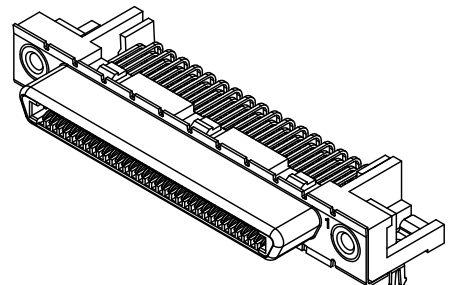

- NOTES:
1. MATERIALS:  
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0, COLOR:BLACK  
TAIL ALIGNER: HIGH TEMPERATURE THERMOPLASTIC,  
TERMINAL: HIGH PERFORMANCE COPPER ALLOY  
BRACKET: BRASS  
SHELL: STEEL  
INSERT: BRASS
  2. FINISHES:  
TERMINAL: 0.05-0.25 MICROMETERS GOLD FLASH IN CRITICAL AREA OVER 0.75 MICROMETERS MINIMUM PALLADIUM NICKEL IN CRITICAL AREA. 1.87 MICROMETERS MINIMUM TIN IN SOLDER TAIL AREA OVER 1.25 MICROMETERS MINIMUM NICKEL.  
BRACKET: 5.0 MICROMETERS BRIGHT TIN OVER 2.50 MICROMETERS COPPER.  
SHIELD: 3.8 MICROMETERS MINIMUM BRIGHT TIN OVER 1.3 MICROMETERS MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).  
INSERT: 2.54 MICROMETERS MINIMUM NICKEL.
  3. PART PERFORMS TO MOLEX PRODUCT SPECIFICATION PS-71425-9999.
  4. PACKAGE PER PK-71430-0101.
  5. APPLICABLE STANDARDS: EIA-3652 AND SFF-8441.
  6. DATE CODE: YR/WK PER EIA-476-A.
  7. PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002. SEE SIDE VIEW FOR SURFACE CLASSIFICATIONS.
  8. TORQUE TO INSTALL SCREWS INTO THREADED INSERTS: 0.34 Nm MAXIMUM.


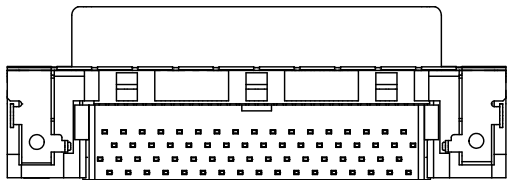


<b>CHANGE PACKAGING</b> EC NO. ICF2010-1970 M DRW:MS (BARRA) 20/10/02/11 CHK:R (BARBER) 11/15/2002 APPR: S (ILLER) 20/10/04/20	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±0.13 ±--- 1 PLACE ±0.25 ±--- ANGULAR ±1/2°	DIMENSION STYLE MM ONLY DRAWN BY DATE KSTILES 11/14/2002 CHECKED BY DATE KSTILES 11/15/2002 APPROVED BY DATE MBNAKIS 11/22/2002	SCALE 4:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE VHDCI RIGHT ANGLE ASSEMBLY
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	MATERIAL NO. SD-71430-015	SHEET NO. 1 OF 3
	MOLEX INCORPORATED				
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

12 11 10 9 8 7 6 5 4 3 2 1

13 12 11 10 9 8 7 6 5 4 3 2 1

PCB THICKNESS	PART NUMBER	TAIL LENGTH 'T'	ENHANCED GROUND TABS	SCREWLOCKS	TAIL LOC. 'A'	HOLE LOCATION 'B'
1.60	71430-0101	2.08	NO	NONE	5.50	6.50 MAXIMUM
1.60	71430-0007	2.08	NO	LOOSE IN BAGS		
1.60	71430-0005	2.08	YES	NONE		
1.60	71430-0008	2.08	YES	LOOSE IN BAGS		
2.36	71430-0268	2.71	NO	NONE		
2.36	71430-0006	2.71	NO	INSTALLED		
2.36	71430-0004	2.71	YES	NONE		
2.36	71430-0009	2.71	YES	INSTALLED		
2.36	71430-0016	2.71	NO	LOOSE IN BAGS		
2.36	71430-0019	2.71	YES	LOOSE IN BAGS	5.30	6.30 MAXIMUM
2.36	71430-0012	2.71	YES	NONE		
1.60	71430-0013	2.08	YES	NONE		

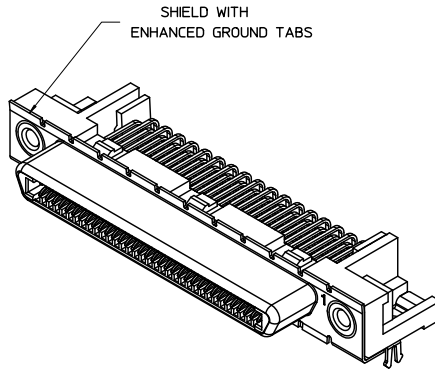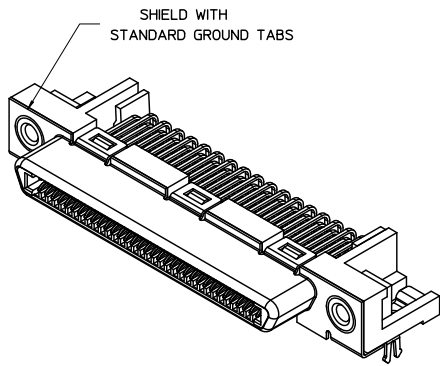


OPTIONAL SCREWLOCK  
PART NUMBER 71433-0002

SEE SHEET 1 EIC NO. UEP2010-1970 DRWING: SBARRA 20/01/02/15 CHK: BARKER 11/15/2002 APPR: SHTLER 20/01/07/20	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	$\nabla = 0$ $\nabla = 0$ $\nabla = 0$	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ± 1/2°	MM ONLY	4:1	METRIC		
	DRAWN BY: KSTILES 11/14/2002 CHECKED BY: KSTILES 11/15/2002 APPROVED BY: MBNAKIS 11/22/2002	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	TITLE: VHDCI RIGHT ANGLE ASSEMBLY MATERIAL NO.: SD-71430-015 DOCUMENT NO.:		SHEET NO.: 2 OF 3
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						MOLEX MOLEX INCORPORATED

12 11 10 9 8 7 6 5 4 3 2 1

13 12 11 10 9 8 7 6 5 4 3 2 1

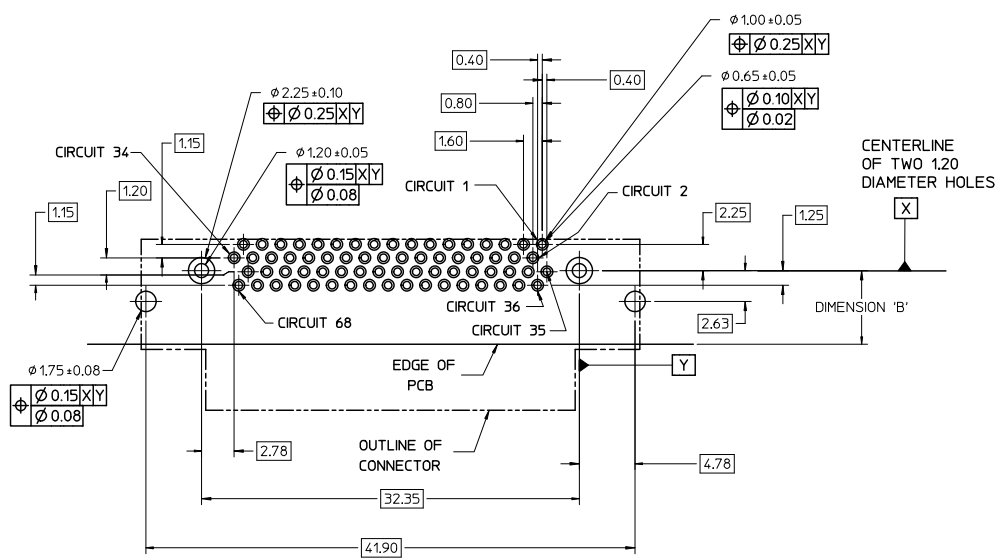


NOTES:

- FOR FULL MATE WITH PLUG, PANEL THICKNESS SHOULD NOT EXCEED 1.0mm.  
FUNCTIONAL MATING WITH MOLEX PLUG CAN STILL BE MAINTAINED WITH PANELS AS THICK AS 2.5mm (BUT PLUG AND RECEPTACLE WILL NOT BE FULLY MATED).

2. GUIDELINES FOR CHOOSING A MOLEX SCREWLOCK:

PANEL THICKNESS	RECOMMENDED SCREWLOCK
LESS THAN OR EQUAL TO 1.00 MM	71433-0002
1.01 TO 2.15 MM	71433-0010





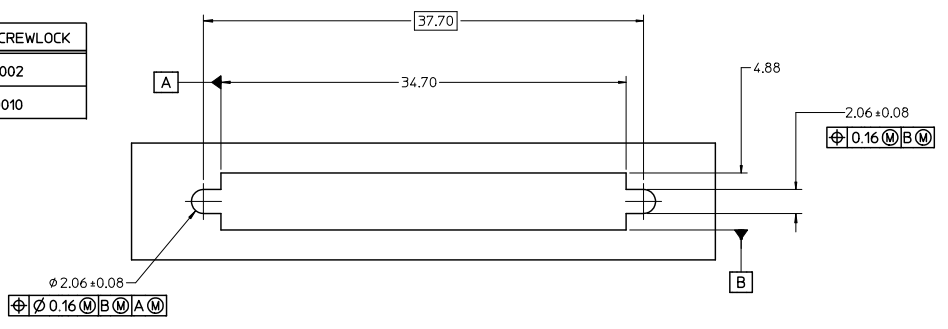


SEE SHEET 1 EC NO. UEP2010-1970 DRWNS:BARRA 20/02/11 CHK:BARBER 11/15/2002 APPR:SMILLER 20/04/20	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla = 0$ $\nabla = 0$ $\nabla = 0$	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ± 1/2°	MM ONLY	4:1	METRIC	TITLE: VHDCI RIGHT ANGLE ASSEMBLY MOLEX INCORPORATED
	DRAWN BY: KSTILES CHECKED BY: KSTILES APPROVED BY: MBNAKIS	DATE: 11/14/2002 DATE: 11/15/2002 DATE: 11/22/2002	MATERIAL NO.: SEE TABLE SIZE: C	DOCUMENT NO.: SD-71430-015	SHEET NO.: 3 OF 3	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

12 11 10 9 8 7 6 5 4 3 2 1

13 12 11 10 9 8 7 6 5 4 3 2 1

- NOTES:
- MATERIALS:  
 HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL94 V-0, COLOR:BLACK  
 TAIL ALIGNER: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP),  
 TERMINAL: HIGH PERFORMANCE COPPER ALLOY  
 SHIELD: STEEL  
 THREADED INSERT: BRASS - LEAD FREE
  - FINISHES:  
 TERMINAL: 0.05-0.25 MICROMETERS GOLD FLASH IN CRITICAL AREA OVER 0.75 MICROMETERS MINIMUM PALLADIUM NICKEL IN CRITICAL AREA, 1.87 MICROMETERS MINIMUM MATTE TIN IN SOLDER TAIL AREA. OVERALL NICKEL UNDERPLATE.  
 BRACKET: 5.0 MICROMETERS MINIMUM BRIGHT TIN OVER A COPPER UNDERPLATE.  
 SHIELD: 3.8 MICROMETERS MINIMUM BRIGHT TIN OVER 1.3 MICROMETERS MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).  
 THREADED INSERT: 2.54 MICROMETERS MINIMUM NICKEL.
  - PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-71425-9999.
  - PRODUCT IS PACKAGED PER PK-71430-0101.
  - APPLICABLE STANDARDS: EIA-3652 AND SFF-8441.
  - DATE CODE: YR/WK PER EIA-476-A.
  - PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002. SEE SIDE VIEW FOR SURFACE CLASSIFICATIONS.
  - TORQUE TO INSTALL SCREWLOCKS INTO THREADED INSERTS: 0.34 Nm MAXIMUM.

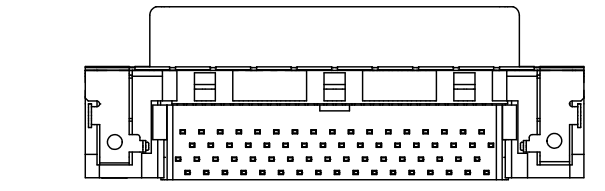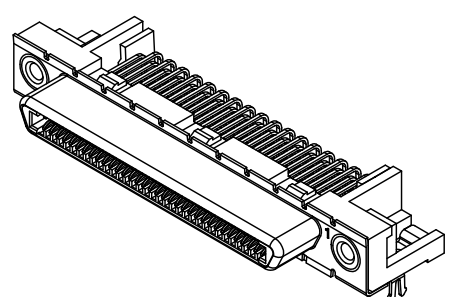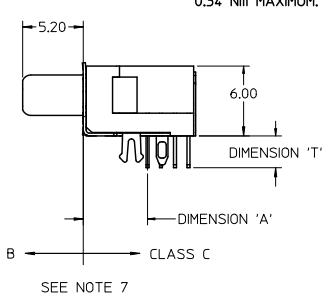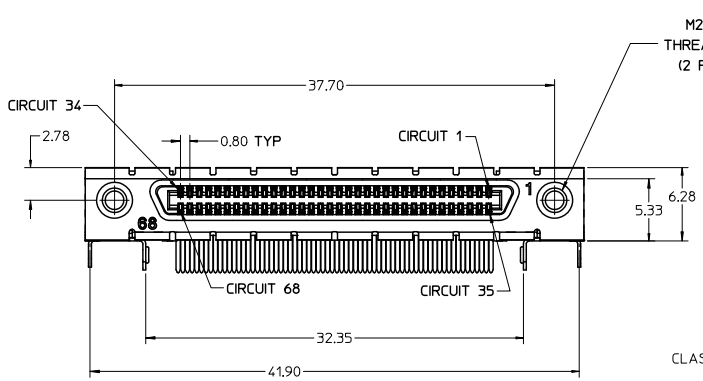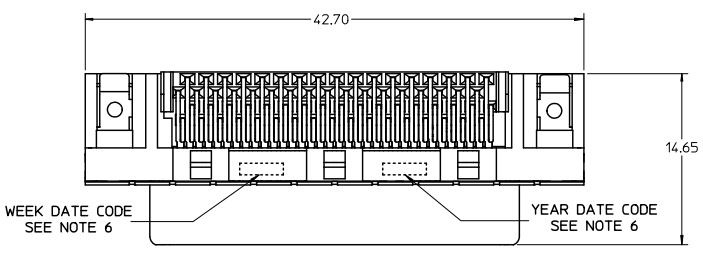




ALL ASSEMBLIES ON THIS DRAWING ARE LEAD-FREE

INITIAL RELEASE EC NO.: LCP2011-2476 DRAWN BY: BBARKER 2011/02/17 CHECKED BY: CHRIS SMILLER APPR: SMILLER 2011/02/25 DESCRIPTION:	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	4 PLACES ±--- ±---	MM ONLY	4:1	METRIC	⊙
	▽=0	3 PLACES ±--- ±---	DRAWN BY: BBARKER DATE: 2011/02/17	TITLE	VHDCI RIGHT ANGLE ASSEMBLY	
	▽=0	2 PLACES ±0.13 ±---	CHECKED BY: SMILLER DATE: 2011/02/25	APPROVED BY: SMILLER DATE: 2011/02/25	MOLEX INCORPORATED	
		1 PLACE ±0.25 ±---	ANGULAR ±1/2°	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-71430-3000	SHEET NO. 1 OF 3
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

12 11 10 9 8 7 6 5 4 3 2 1

13 12 11 10 9 8 7 6 5 4 3 2 1

PCB THICKNESS	PART NUMBER	TAIL LENGTH "T" +0.50/-0.25	ENHANCED GROUND TABS	SCREWLOCKS (SEE GUIDELINE FOR CHOOSING A SCREWLOCK ON SHEET 3)	TAIL LOCATION "A"	PCB HOLE LOCATION "B"
1.60		2.08	NO	NONE	5.50	6.50 MAXIMUM
1.60		2.08	NO	71433-2002 LOOSE IN BAGS		
1.60		2.08	YES	NONE		
1.60		2.08	YES	71433-2002 LOOSE IN BAGS		
2.36		2.71	NO	NONE		
2.36		2.71	NO	71433-2002 INSTALLED		
2.36		2.71	YES	NONE		
2.36		2.71	YES	71433-2002 INSTALLED		
2.36		2.71	NO	71433-2002 LOOSE IN BAGS		
2.36	71430-3019	2.71	YES	71433-2002 LOOSE IN BAGS		
2.36		2.71	YES	NONE	5.30	6.30 MAXIMUM
1.60		2.08	YES	NONE		

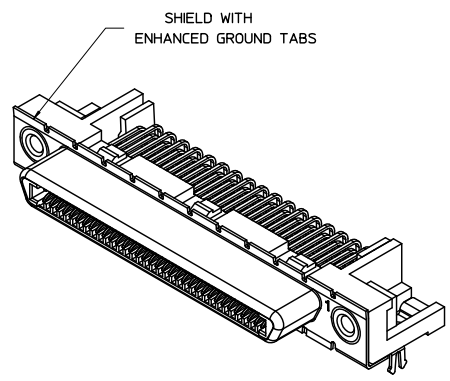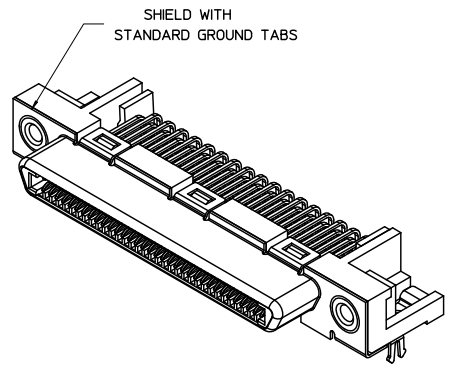


OPTIONAL SCREWLOCK  
PART NUMBER 71433-2002 SHOWN  
(SEE GUIDELINE FOR CHOOSING  
A SCREWLOCK ON SHEET 3)

SEE SHEET 1 EIC NO. UCF2011-2/76 DRAWN BY: BBARKER 2011/02/17 CHECKED BY: SMILLER APPR: SMILLER 2011/02/25 REV: A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	$\nabla = 0$ $\nabla = 0$ $\nabla = 0$	4 PLACES ± mm ± INCH 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ± 1/2°	MM ONLY	4:1	METRIC	DRAWN BY: BBARKER DATE: 2011/02/17 CHECKED BY: SMILLER DATE: 2011/02/25 APPROVED BY: SMILLER DATE: 2011/02/25	TITLE: VHDCI RIGHT ANGLE ASSEMBLY MOLEX INCORPORATED
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	MATERIAL NO.	DOCUMENT NO.	SHEET NO.		
					2 OF 3		

12 11 10 9 8 7 6 5 4 3 2 1

13 12 11 10 9 8 7 6 5 4 3 2 1

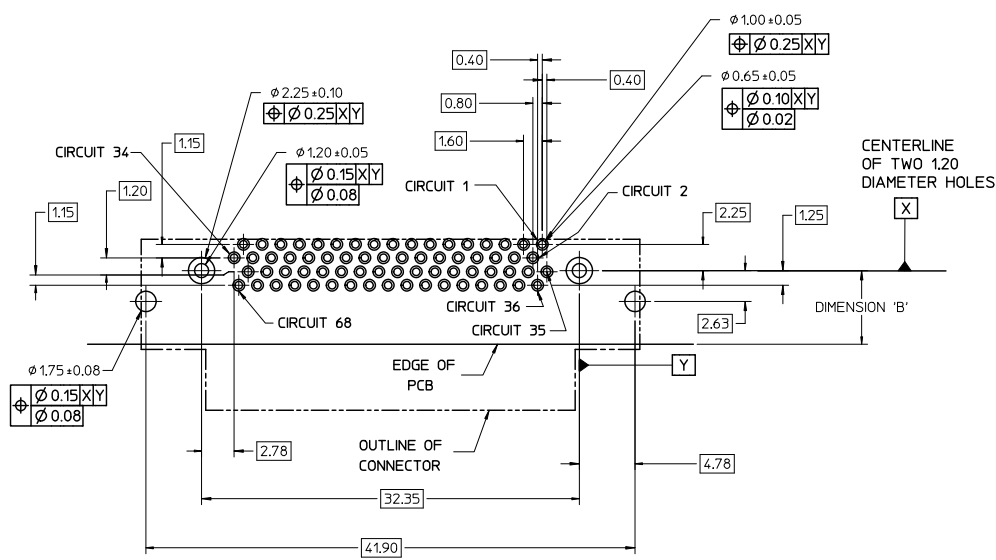


NOTES:

- FOR FULL MATE WITH PLUG, PANEL THICKNESS SHOULD NOT EXCEED 1.0mm.  
FUNCTIONAL MATING WITH MOLEX PLUG CAN STILL BE MAINTAINED WITH PANELS AS THICK AS 2.5mm (BUT PLUG AND RECEPTACLE WILL NOT BE FULLY MATED).

2. GUIDELINE FOR CHOOSING A MOLEX SCREWLOCK:

PANEL THICKNESS	RECOMMENDED SCREWLOCK
LESS THAN OR EQUAL TO 1.00 MM	71433-2002
1.01 TO 2.15 MM	71433-2010

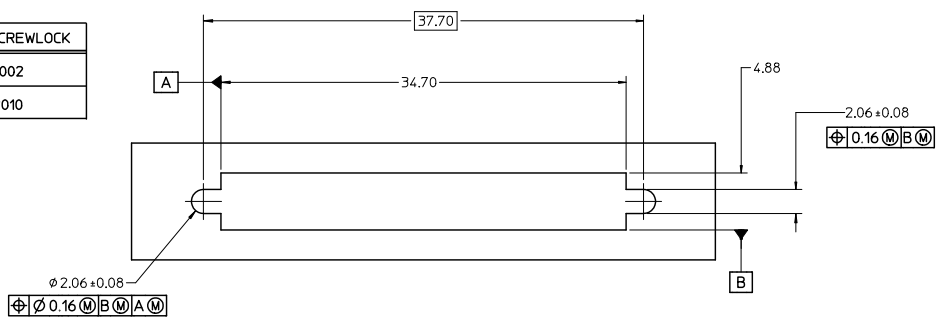

SEE SHEET 1 EC NO. UEP2011-2476 DRAWN BY: BBARKER 2011/02/17 CHECKED BY: CHK03SMART APPR: SMILLER 2011/02/25	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla = 0$ $\nabla = 0$ $\nabla = 0$	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ± 1/2°	MM ONLY	4:1	METRIC	V H D C I R I G H T A N G L E A S S E M B L Y
	DRAWN BY: BBARKER CHECKED BY: CHK03SMART APPR: SMILLER DATE: 2011/02/17 DATE: 2011/02/25	APPROVED BY: SMILLER DATE: 2011/02/25	MATERIAL NO.: DOCUMENT NO.:	MOLEX INCORPORATED SD-71430-3000	SHEET NO.: 3 OF 3	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE: C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

12 11 10 9 8 7 6 5 4 3 2 1