

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|---------|----|------|
| CP | 00 | P | LTR | DESCRIPTION | DATE | BY | APPD |
| | | D | | REVISED PER ECO-08-007327 | 05SEP08 | BM | WM |

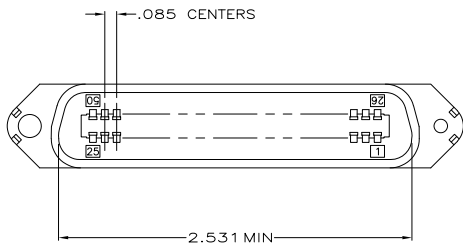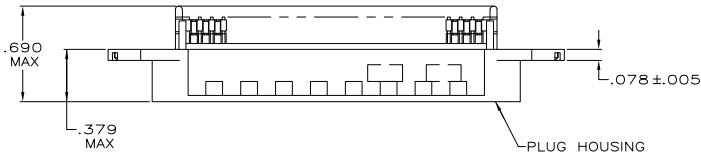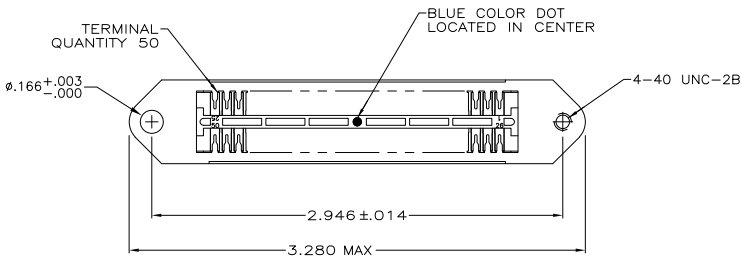

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. MATERIAL: HOUSING - POLYPHENYLENE OXIDE (BLACK).
 TERMINAL - HIGH STRENGTH COPPER ALLOY PLATED WITH .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, .000030 MIN TOTAL ON MATING SURFACE, .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
3. WIRE SIZE: 24 OR 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.

| | |
|-------------|-------------|
| AS SHOWN | 1888616-1 |
| DESCRIPTION | PART NUMBER |

| | | | | | |
|---|--|---|--|---|---------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DW: J. PATTERSON 24AU006 CK: W. MILLHIMES 24AU006 APD: W. MILLHIMES 24AU006 | | Tyco Electronics Corporation Harrisburg, PA 17105-3608 | |
| DIMENSIONS: INCHES: 0 PLC ± .005 1 PLC ± .005 2 PLC ± .005 3 PLC ± .005 4 PLC ± .005 ANGLES: ± .005 | | TOLERANCES UNLESS OTHERWISE SPECIFIED: FINISH: | | NAME: W. MILLHIMES PRODUCT SPEC: APPLICATION SPEC: WEIGHT: CUSTOMER DRAWING | |
| MATERIAL: | | FINISH: | | SIZE: A2 CASE CODE: 00779 DRAWING NO: C=1888616 RESTRICTED TO: | |
| | | | | SCALE: 2:1 | SHEET: 1 of 1 |
| | | | | REV: D | |

AMP 1471-9 REV 31MM0200

1888616

A