

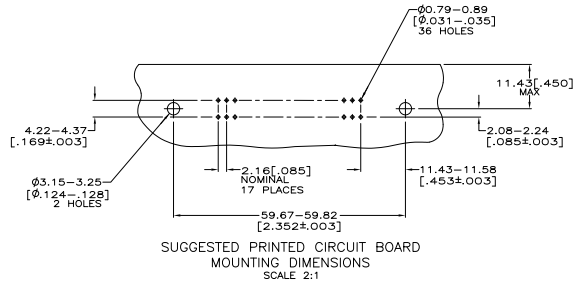

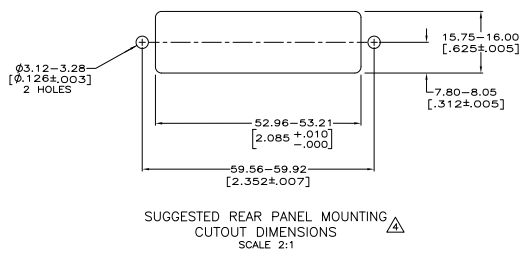


REV	DATE	DESCRIPTION	BY	CHK	APP
B		REVISED PER ECO-08-02737	DMPPROB	BM	WM
B1		REVISED PER ECO-09-024927	10N009	KK	AEG

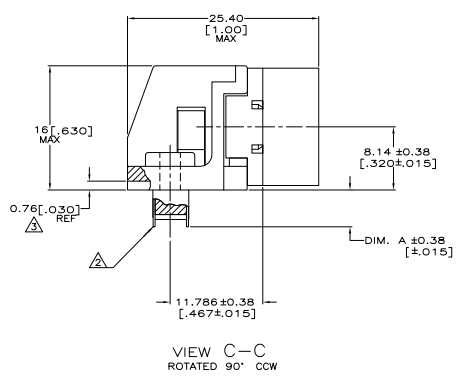

- △ MATERIAL: HOUSING, BRACKET, PLATE & COMB - THERMOPLASTIC, BLACK, 94V-0 RATED. TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER 0.76µm [0.00030] MIN GOLD PLATE OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76µm [0.00030] MIN TOTAL ON MATING SURFACE, 3.05µm [0.00120] MIN TIN PLATE ON TAILS, ALL OVER 1.27µm [0.00050] MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
- △ TERMINAL 1 IS LOCATED IN THIS ROW FOR STANDARD ORIENTATION, 5552743-1 AND -5.
- △ TERMINAL SUPPORT PLATE CLEARANCE FOR TERMINAL STRAIN RELIEF AND FLUX REMOVAL.
- △ MAXIMUM PANEL THICKNESS: 1.57 [0.62].
- △ DETAIL "A" IS VIEWED FROM MATING SIDE OF PLUG ASSEMBLY.
- △ FOR USE WITH A NO.4 BT TYPE SELF-TAPPING SCREW.
- 7. IF TERMINALS DO NOT EXTEND BELOW COMB, THEN COMB SHOULD BE PARTIALLY RETRACTED BEFORE INSERTING CONNECTOR INTO PRINTED CIRCUIT BOARD.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

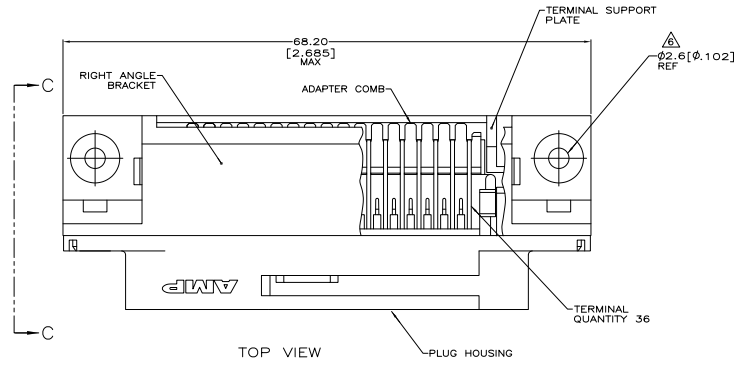

REV	DATE	DESCRIPTION	BY	CHK	APP
1		PLUG ASSEMBLY, 36 POSITION, RIGHT ANGLE, SELF-TAPPING, CHAMP-LOUIS			

THIS DRAWING IS A CONTROLLED DOCUMENT.	DATE	BY	CHK	APP
DATE	BY	CHK	APP	

THIS DRAWING IS A CONTROLLED DOCUMENT.	DATE	BY	CHK	APP
DATE	BY	CHK	APP	

THIS DRAWING IS A CONTROLLED DOCUMENT.	DATE	BY	CHK	APP
DATE	BY	CHK	APP	